



500kg / 1000lbs

1000500


0
0
0
0
2
6
5
3
9
0
0
0
1
9
L
x
1
9
L
0
0
0
W
x
1
1
H
0
0
0

5
0
2
V
D
C
O
N
C
C
O
M
/
+
/
-

$\frac{V_D}{V_C} = \frac{1}{2}$
 $\frac{V_D}{V_C} = \frac{1}{4}$
 $\frac{V_D}{V_C} = \frac{1}{5}$
 $\frac{V_D}{V_C} = \frac{1}{M}$





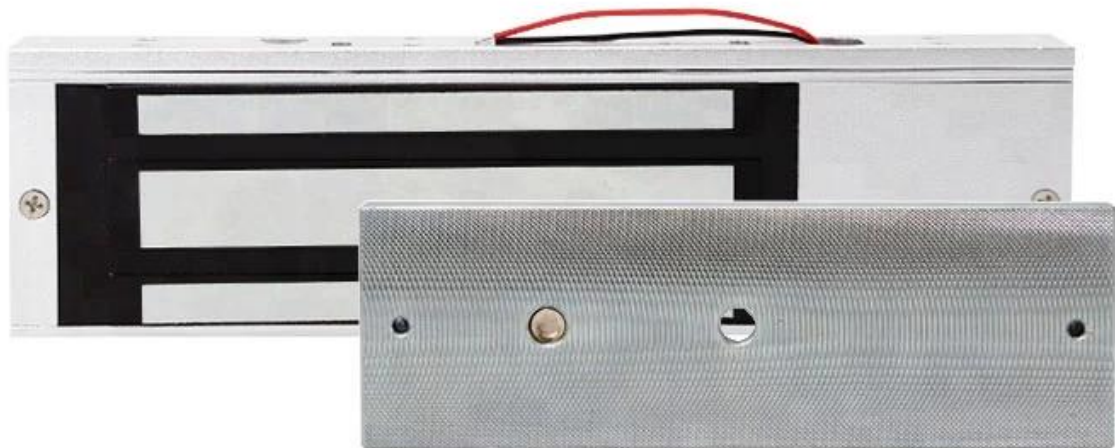

特點

- 重量 500kg / 1000lbs
- 12 / 24 VDC 電壓
- 12VDC 電壓
- MOV 保護電路
- 可選配 LED 指示燈
- NO / NC / COM 接點
- NO / NC / COM 接點
- 可選配 LED 指示燈
- 可選配 LED 指示燈
- 可選配 LED 指示燈

- 1000mm x 100mm x 10mm
- 1000mm x 100mm x 10mm

1000mm x 100mm x 10mm OEM / ODM



1000mm x 100mm x 10mm LED 1000mm x 100mm x 10mm 1000mm x 100mm x 10mm
 ACM-Y500 1000mm x 100mm x 10mm PCB 12v 24v 7 1000mm x 100mm x 10mm PCB 1000mm x 100mm x 10mm
 1000mm x 100mm x 10mm 1000mm x 100mm x 10mm

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□□

□□□□
□□□DHL□FEDEX□TNT□UPS□EMS□SEA□AIR□□□□□□□□□□□□
□□□□□□□□□□□□

□□
□□□□□□□□1□□□□6□□
□□□□□35 * 30 * 20cm□□□□□24kg□□□□□50□



服務項目

1. 24小時服務
2. 專業技術團隊
3. OEM / ODM
4. fashin 品牌
5. 專業團隊
1. 專業技術團隊
2. 專業技術團隊
3. 專業技術團隊 2-3 個月
6. 專業技術團隊 1-5 個月 7-30 天
7. 專業技術團隊 T / T Western Union Paypal
8. DHL FEDEX TNT UPS EMS SEA AIR 專業技術團隊

服務項目

1. 專業技術團隊
專業技術團隊
2. 專業技術團隊
- 專業技術團隊
專業技術團隊 DHL FedEx TNT UPS
3. 專業技術團隊
專業技術團隊
4. 專業技術團隊
專業技術團隊 5000 3-7 100,000 7-15
5. 專業技術團隊
專業技術團隊 OEM
6. 專業技術團隊
專業技術團隊 20 專業技術團隊 RFID / NFC / RFID / RFID RFID