



**IP68 Wasserdichter
Näherungsleser für
Bürogemeinschaftszugangskontrol-
le Wiegand 26 125 kHz ID EM-
Karte RFID-
Zugangskontrollkartenleser**

ACM-08E ist ein berührungsloser Wiegand-ID-Kartenleser mit 125 kHz, der ein fortschrittliches Hochfrequenz-Empfangsschaltungsdesign nutzt und eingebettet ist Mikrocontroller, kombiniert mit einem effizienten Decodieralgorithmus, um die schreibgeschützte 64-Bit-EM4100-kompatible ID-Karte (EM) zu vervollständigen Karte) zeichnet sich durch hohe Empfangsempfindlichkeit, niedrigen Arbeitsstrom, einzelne Gleichstromversorgung, niedrigen Preis und hohe Leistung aus Leistung. Das staubdichte,

feuchtigkeitsbeständige und vollständig abgedichtete Design erleichtert Benutzern die Installation unter rauen Bedingungen, z wie im Außenbereich, ohne mechanische Abnutzung und langlebig.

M
C
M
e
B
D
n
u
m
m
e
r
F
Z
B
H
H
e
n
z
B
a
B
r
V
B
C
s
t
e
m
p
e
r
a
t
u
r
B
0
%
r
i
e
b
s
f
e
u
c
h
t
i
g
k
e
i
t

A
r
b
e
i
t
h
s
t
p
e
m
h
u
g
A
m
h
i
t
s
s
t
r
o
m
h
m
s
e
m
m
(
a
h
w
ä
h
t
e
g
v
o
n
d
e
r
K
a
r
t
e
n
n
u
t
z
u
n
g
s
u
m
g
e
b
u
n
g
)

S
a
h
w
a
r
z
A
B
m
e
s
s
u
h
A
G
m
m
)
K
a
s
t
w
e
n
s
y
P
K
4
1
/
E
M
4
1
u
s
w
.)

M
B
S
a
n
n
i
l
g
e
s
p
r
i
t
z
t
e
r
K
u
n
s
t
s
t
o
f
f
,
g
e
f
ü
l
l
t
m
i
t
s
c
h
w
a
r
z
e
m
H
a
r
z
k
l
e
b
e
r
(
e
f
f
e
k
t
i
v
w
a
s
s
e
r
f
e
s
t
)

B
i
m
h
a
n
l
k
a
h
s
p
E
D
u
h
d
S
u
m
m
e
r
s
t
e
u
e
r
n
G
e
i
c
h
t

Detaillierte Bilder

EASY INSTALLATION

Stable performance, firm and durable wall-mounted installation



1. Draw marks and punch holes



2. Upper screws secure the rear cover



3. Mounting front cover

4. Screw the screws on the bottom



IT CAN ALSO BE INSTALLED OUTDOORS



IP68 PROTECTION DESIGN

The inside of the reading head is filled with glue, fully waterproof, rainproof, and high protection level

Two-color indicator light




Standby mode



Trigger state



Sealer resin adhesive



IP68 PROTECTION



Finished product

Flame retardant material



SUPPORT FOR CUSTOM

Products also provide logo shell customization

ODM



LOGO CUSTOMIZATION




Wiring instructions



WG26-34

WG card reader	RED		DV 12V	Access card reader
	BLACK		GND	
	GREEN		D0	
	WHITE		D1	
	BLUE		LED	
	YELLOW		BEEL	
	GREY		WG34	

This product is manual measurement, allowing errors ■

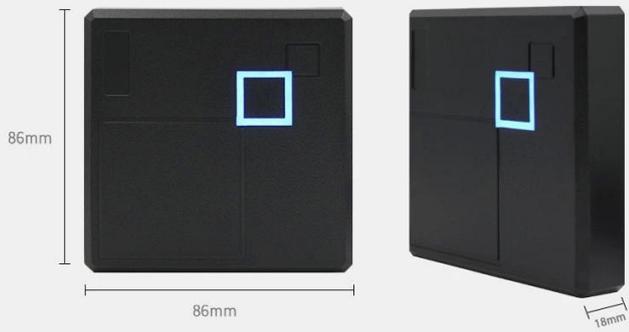

USAGE SCENARIO



Community gate



Office building gate



School gate



Elevator control system

gdzytech.en.alibaba.com