

Descripción del producto



12V DC Mini Solenoide Bloqueo 60kg Fallo magnético Cerradura segura para vidrio / Control de acceso a puerta de madera / de fuego

Collinear Cargar prueba 60kg, 120Pounds.

MOV proporciona protección de corriente inversa.

Magneismo anti-residual diseñado.

Material de alta resistencia, carcasa de aluminio anodizado.

Diseño sin perno mecánico.

Aumentar la fuerza de retención, dual espalda aislante.

CE certificado por la Unión Europea, pero certificada por la Oficina de Seguridad Pública de China.

[illegible]

- [illegible]

[illegible]

Mini Single Door Magnetic Lock


Stable Holding Force

magnetic locks
have 60kg(100 lbs) linear pulling force.



Aluminum Shell

Shell with high strength alloy material,
anode hardening treatment.

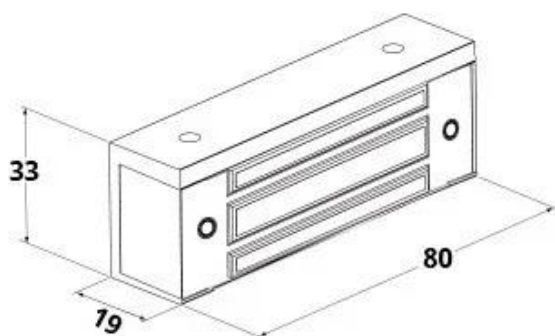

NE-60
Lock Size: 80L*33W*19H(mm)


- Voltaje de entrada: DC12V, o DC24 (se puede personalizar)
- Fuerza de retención: 60kgs (120lbs)

- Adecuado para: escaparate, puerta del gabinete, etc.
- Acabados para Shell: anodizado aluminium
- Acabados para Magnetic: Zinc
- Acabados para armadura: zinc

Aplicación del producto

Double Insulation

Lock body with double insulation treatment.

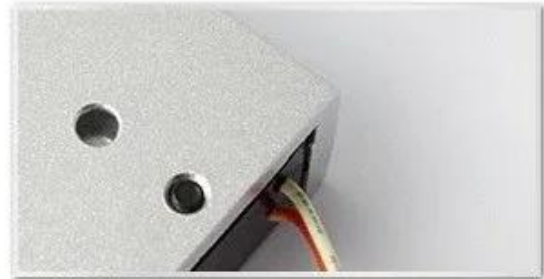

special Used to Small Cabinet Door

Saves time and power when installation.



Diagrama de instalación

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

Productos relacionados

[Haga clic aquí para pedir y tenga su muestra GRATUITA en 3 días!](#)

Somos proveedores de productos de control de seguridad integral profesional con 20 años de experiencia, nos aseguramos de ofrecer la mejor solución de la solución del sistema de control de acceso. Por lo tanto, envíe sus datos de consulta en la siguiente, haga clic en "Enviar" ahora!

Esperamos formar relaciones comerciales exitosas con nuevos clientes en todo el mundo en el futuro.



ACM-280N

Placa posterior de bloqueo magnético (280kgs / 600lbs) Adecuado para: puerta de madera, puerta de vidrio, puerta de metal, fuego | Puerta de prueba



ACM-Y180

Montado en superficie (180 kg / 300lbs) Bloqueo magnético 2bols Fail Safe. Suitable para: puerta de madera, puerta de vidrio, puerta de metal, puerta a prueba de fuego.



ACM-Y280

280kg (600lbs) Cerradura magnética de una sola puerta adecuada para: puerta de madera, puerta de vidrio, puerta de metal, puerta a prueba de fuego.



ACM-Y350

Bloqueo magnético de una sola puerta 350kgs (800lbs) Adecuado para: puerta de madera, puerta de vidrio, puerta de metal, puerta a prueba de fuego.



ACM-Y500

Cerradura magnética de una sola puerta 500kgs (1000lbs) Adecuado para: puerta de madera, puerta de vidrio, puerta de metal, puerta a prueba de fuego.



ACM-Y280-W

Cerradura magnética de una sola puerta 280kgs (600 lbs) impermeable. Suprutable para: puerta de madera, puerta de vidrio, puerta de metal, puerta a prueba de fuego.

You May Need

Complete Door Access Control Solution Provider



RFID Card



RFID Key fob



RFID Wristband



RFID Reader



**Long Distance
UHF Reader**



**Access Control
Reader**



Biometric Controller



RFID Controller



Door EM Lock

ABOUT GOLDBRIDGE

As a one of leading manufacturer and exporter of RFID products in China, We have been in this field for 20 years already. We have rich production and exportation experience on RFID products. Our strength products are: rfid card, rfid Keyfob, rfid wristband, rfid tag and various rfid reader. We are also the access control solution provider.

[MORE >>](#)



ABOUT OUR FACTORY

Established in 1999, Shenzhen Goldbridge has witnessed the technological innovation from rfid card to rfid tag, the overall change of market products in the past 20 years, and registered "Shenzhen Goldbridge Industrial Co., Ltd." in 1999.

At present, Goldbridge has developed into a National High-Tech Enterprise, which is specialized in the integration of production, market and research. Starting from the PVC cards and RFID cards factory with only 66 workers, Goldbridge has accomplished the successful transition from traditional manufacturing industry to IOT technology enterprise (RFID technology development).



With the accumulation of dozens of software copyrights and utility new inventions and patents, Goldbridge has been rewarded as "National High-Tech Enterprise", "Shenzhen High-Tech Enterprise", and has become an integrated enterprise which focuses on research, production and market. Meanwhile, by adopting the "Military + School + Family" corporate culture concept, accompanied by the continuous innovation of business model and marketing model, plus the B2B, B2C platform and excellent sales team, Goldbridge sells its products all over the world.



Honers & Certificates

