Descripción del producto

Descripción del producto

caracteristicas:
1. Leer y escribir en el área limitada del equipo por encima de 0-60 CM del espacio estrecho;
2. Proporciona configuraciones SDK y puede proporcionar rutinas de desarrollo C #, VC, VB, Java;
3. El área de EPC, las reservas, el área de usuario admite la función de bloqueo de desbloqueo, se puede utilizar para los requisitos de privacidad y seguridad de alta ocasión;
4. Admite la función discriminante adyacente, puede evitar con una tarjeta en poco tiempo (1-255 segundos ajustables) repetir la carga en el interior;
5. Admite una operación de escritura rápida, conveniente para leer y escribir.
Descripción del producto:

Especificaciones	
Frecuencia de trabajo	902 ~ 928 MHz o 865 ~ 868 MHz
Protocolo	ISO18000-6C (EPC C1 GEN2)
Puerto de comunicación	USB izquierdo a puerto serie / USB derecho a salida de datos
Software y SDK	DEMO y C #, VC, VB, Java, DELPH, etc.,
Cifrado	Se puede cifrar directamente, prevención de copia.
Rango de lectura	Lectura estable 0 ~ 60cm.
Rango de escritura	Escritura estable 0 ~ 10 cm
Parámetros físicos	
Adaptador	USB
Potencia de salida	0 ~ 17dBm
Temperatura de trabajo	-20 ℃ ~ + 55 ℃
Temperatura de almacenamiento	-20℃~ + 55℃
Tamaño del artículo	142x 85x20mm
Tamaño del paquete	180x120x50mm
Peso neto	500g
Material de la cáscara	abdominales

Mostrar productos:

UHF
SPEEDWORK

Back Design in Black

Interfaz de software:

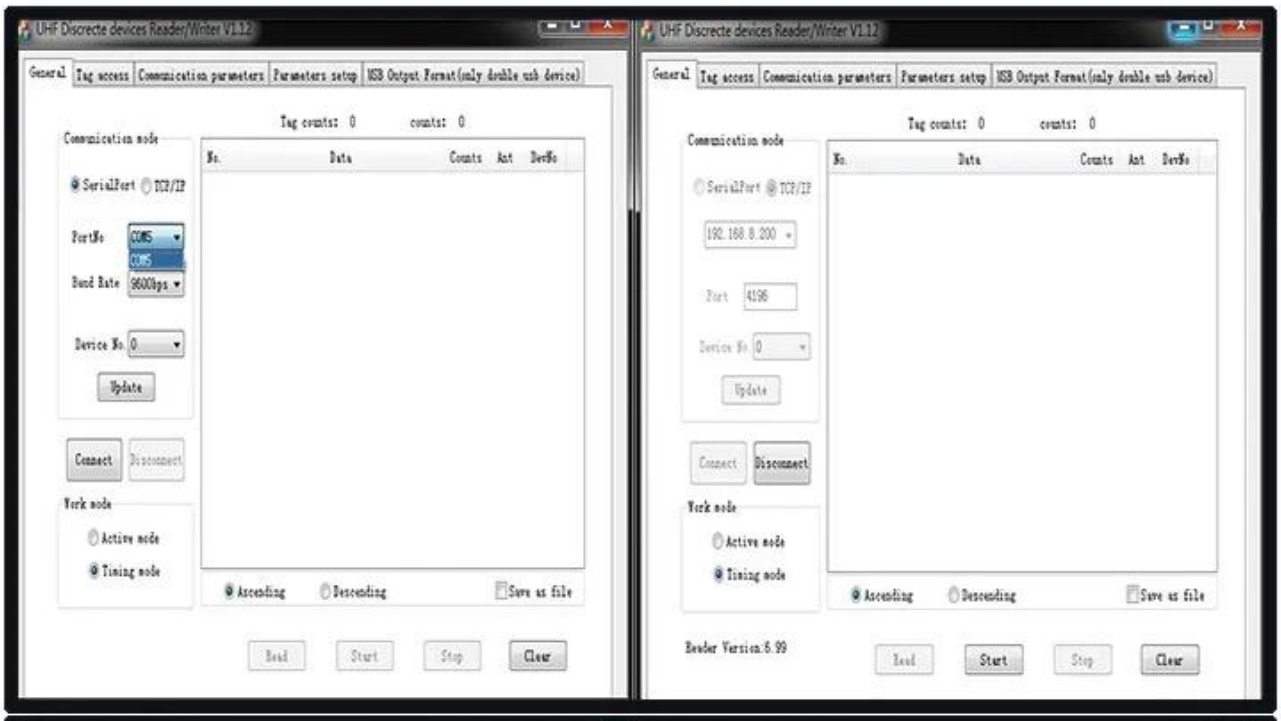
UHF Discrecte devices Reader/Writer V1.12
General
Tag access
Communication parameters
Parameters setup
USB Output Format(only double usb device)
Tag counts: 0
counts: 0
Communication mode
SerialPort
TCP/IP
PortNo
COM5
COM5
Baud Rate
9600bps
Device No.
0
Update
Connect
Disconnect
Work mode
Active mode
Timing mode
No.
Data
Counts
Ant
DevNo
Ascending
Descending
Save as file
Read
Start
Stop
Clear
192.168.8.200
Port
4196
Reader Version:6.99

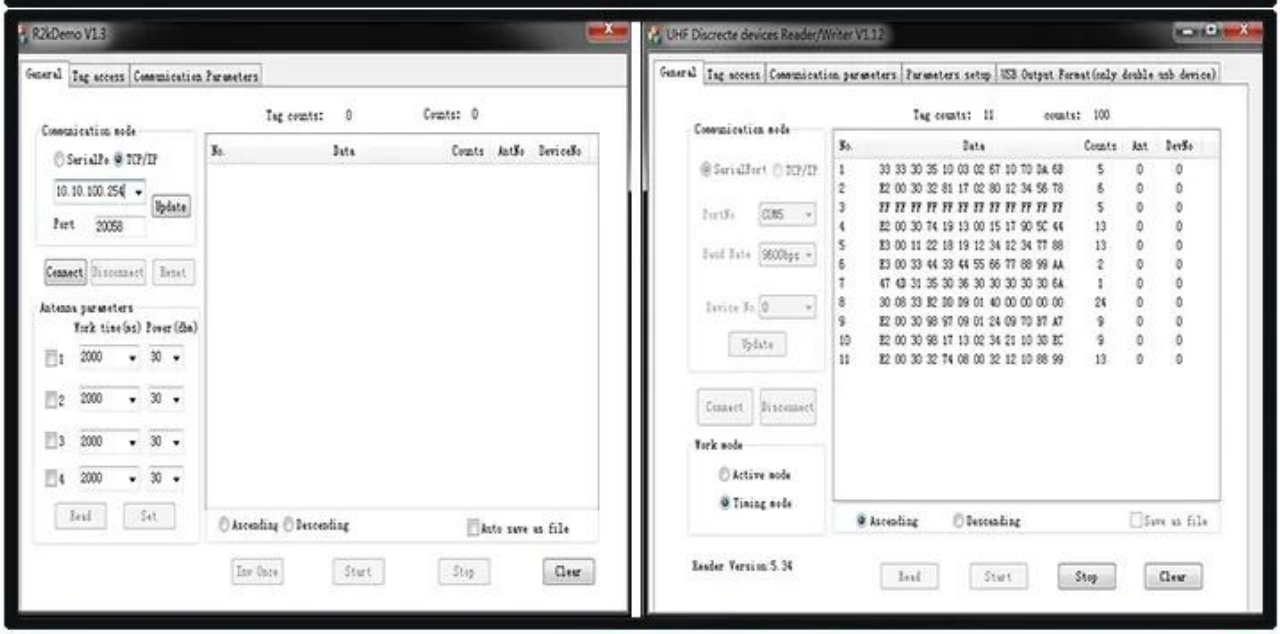
R2kDemo V1.3
General
Tag access
Communication Parameters
Tag counts: 0
Counts: 0
Communication mode
SerialPo
TCP/IP
10.10.100.254
Update
Port
20058
Connect
Disconnect
Reset
Antenna parameters
Work time(ms)
Power(dbm)
1
2000
30
2
2000
30
3
2000
30
4
2000
30
Read
Set
No.
Data
Counts
AntNo
DeviceNo
Ascending
Descending
Auto save as file
Inv Once
Start
Stop
Clear
UHF Discrecte devices Reader/Writer V1.12
Tag counts: 11
counts: 100
1 30 33 30 35 10 03 02 67 10 70 DA 68 5 0 0
2 E2 00 30 32 81 17 02 80 12 34 56 78 6 0 0
3 FF FF FF FF FF FF FF FF FF FF FF FF 5 0 0
4 E2 00 30 74 19 13 00 15 17 90 5C 44 13 0 0
5 E3 00 11 22 18 19 12 34 12 34 77 88 13 0 0
6 E3 00 33 44 33 44 55 66 77 88 99 AA 2 0 0
7 47 43 31 35 30 36 30 30 30 30 30 6A 1 0 0
8 30 08 33 B2 30 09 01 40 00 00 00 00 24 0 0
9 E2 00 30 98 97 09 01 24 09 70 B7 A7 9 0 0
10 E2 00 30 98 17 13 02 34 21 10 30 BC 9 0 0
11 E2 00 30 32 74 08 00 32 12 10 88 99 13 0 0
Reader Version:5.34
Read
Start
Stop
Clear

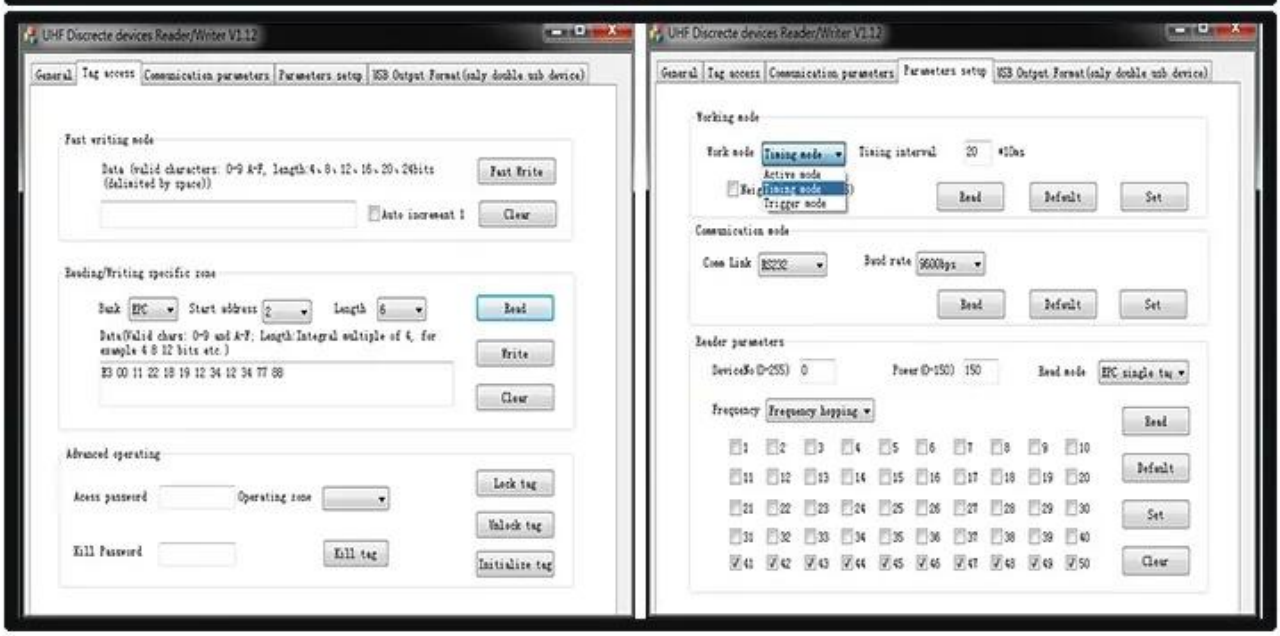
UHF Discrecte devices Reader/Writer V1.12
Fast writing mode
Fast Write
Auto increment 1
Clear
Reading/Writing specific zone
Bank
EPC
Start address
2
Length
6
Read
Write
Clear
E3 00 11 22 18 19 12 34 12 34 77 88
Advanced operating
Access password
Operating zone
Lock tag
Unlock tag
Kill Password
Kill tag
Initialize tag
Working mode
Work mode
Timing mode
Active mode
Trigger mode
Timing interval
20
*10ms
Read
Default
Set
Communication mode
Com Link
RS232
Baud rate
9600bps
Reader parameters
DeviceNo(0-255)
0
Power(0-150)
150
Read mode
EPC single tag
frequency
Frequency hopping
Clear

Solicitud:
Tráfico inteligente como ETC;
Cruce de fronteras aduanero, estacionamiento, ponderación automática;
Logística como gestión de contenedores, gestión de palets, gestión de activos, etc.
Control de acceso y venta de entradas;
Productos farmacéuticos como gestión de residuos médicos, etc.

Productos relacionados

Shenzhen Goldbridge se centra en la innovación, I + D, producción y venta de productos IOT RFID y soluciones de aplicación, Categoría de lector rfid que incluye lector de escritorio UHF, lector UHF integrado, lector fijo UHF R2000, módulo UHF OEM, lector de mano RFID, etiquetas rfid uhf, lector rfid activo de 2.4G, lector de largo alcance EM 125KHZ, hardware RFID industrial y software integrado, obtuvo la certificación empresarial nacional de alta tecnología FCC, CE y ROHS.?

Raleted Long distance range RFID Reader & Tags

ACM-812A -8dBi 2-6 meter , 235x235x57mm	ACM-803A -9dbi 6-10 meters,260X260X45mm	ACM-811A-8dBi Muti-tag Reader, 6-9 meters, 255x255x45MM
ACM217-UHF UHF Reader and Writer - Provide Free program and SDK	ACM919L 4 Ports UHF Reader Impinj R2000 ,270mm*180mm*27mm	ACM-819A-12dBi Muti-tag Reader, 10-20 meters, 460x460x55MM
ACM8017 UHF Handheld Reader UHF +WIFI+GRPS Quad Band+Barcode 1D/2D	ACM09G-TCP/IP Or Wiegand Active 2.4G Reader 30-70meter, Provide FREE SDK and Demo	ACM08Y RFID EM 125Khz 70cm-1meter Middle long range Reader
ACM-MU85M One Antenna Port Module- 30dbm adjustable 0-15m used for handheld reader. ,55.5x39.5x7.6mm	ACM-MU82M 4 Antennas Ports Module 4ports 25m speed anti-collision impinj R2000 67.5mmx51mmx7.9mm	ACM-MU13M One Port Module Korea certificate 0-15m Size: 8x25x3.5mm
UHF Anti-metal Tag, ACM-UHF-M3: 135x22x12mm ±2mm	Anti-tamper windshield sticker tag (ACM-S001)	UHF ISO PVC Card Tag , 86x54mm (ACM-UHF Card)

Email: sales@goldbridgesz.com Web: http://www.goldbridgesz.com

About Us

Similar Products

GOLDBRIDGE

SHENZHEN GOLDBRIDGE INDUSTRIAL CO.,LTD

ACM Shenzhen Goldbridge
industrial company

As a one of leading exporter and manufactuer of RFID products in China , . We have been in this field for 17 years already . We have rich production and exportation experience on RFID products . Our strength products are : RFID card , RFID keyfob , RFID wristband , RFID tag and various RFID reader . We are also the access control solution provider .

FACTORY PHOTOS

Our Certificate

>>