

Description du produit



Lecteur de proximité de contrôle d'accès communautaire de bureau étanche IP68 Wiegand 26 125 kHz lecteur de carte de contrôle d'accès RFID EM

ACM-08E est un lecteur de carte d'identité Wiegand sans contact de 125 kHz, utilisant une conception avancée de circuit de réception de radiofréquence et intégré Microcontrôleur, combiné à un algorithme de décodage efficace, pour compléter la carte d'identité compatible em4100 en lecture seule 64 bits (EM Carte) présente les caractéristiques d'une sensibilité de réception élevée, d'un faible courant de fonctionnement, d'une alimentation CC unique, d'un prix bas et élevé performance. La conception étanche à la poussière, à l'humidité et entièrement scellée permet aux utilisateurs de l'installer

facilement dans des conditions difficiles
telles que
comme à l'extérieur, sans usure mécanique
et durable.

N
C
M
é
8
D
d
e
m
o
d
è
l
e
F
2
6
K
h
2
n
c
e
T
2
h
p
2
5
2C
t
u
r
e
d
e
f
o
n
c
t
i
o
n
n
e
m
e
n
t

~~K~~
~~u~~
~~u~~
i
d
i
t
é
d
e
f
o
n
c
t
i
o
n
n
e
m
e
n
t
C
e
G
4
2
W
n
d
e
f
o
n
c
t
i
o
n
n
e
m
e
n
t
C
m
A
h
a
n
t
d
e
t
r
a
v
a
i
l

Ph
h
a
g
m
m
é
h
é
p
é
n
d
d
e
l
,
e
n
v
i
r
o
n
n
e
m
e
n
t
d
,
u
t
i
l
i
s
a
t
i
o
n
d
e
l
a
c
a
r
t
e
)
O
i
r
e
u
r

B
6
m
8
h
s
l
8
h
m
m
)
C
g
p
e
d
d
c
h
d
e
n
t
i
t
é
(
T
K
4
1
/
E
M
4
1
,
e
t
c
.)

M
B
S
é
r
p
h
s
t
i
q
u
e
p
u
l
v
é
r
i
s
é
,
r
e
m
p
l
i
s
d
e
c
o
l
l
e
r
é
s
i
n
e
n
o
i
r
e
(
e
f
f
i
c
a
c
e
m
e
n
t
é
t
a
n
c
h
e
)

H
a
n
z
e
p
a
p
e
a
u
t
c
b
n
t
é
ô
r
é
r
l
a
L
E
D
e
t
l
e
b
u
z
z
e
r
P
ø
G
d
s

Images détaillées

EASY INSTALLATION

Stable performance, firm and durable
wall-mounted installation



1. Draw marks and punch holes



2. Upper screws secure the rear cover



3. Mounting front cover

4. Screw the screws on the bottom




IT CAN ALSO BE INSTALLED OUTDOORS




IP68 PROTECTION DESIGN

The inside of the reading head is filled with glue, fully
waterproof, rainproof, and high protection level


Two-color indicator light



Standby mode



Trigger state



IP68 PROTECTION



Sealer resin adhesive



Finished product

Flame retardant material



SUPPORT FOR CUSTOM

Products also provide logo shell customization

ODM



LOGO CUSTOMIZATION



COMPANYNAME



COMPANYNAME



COMPANYNAME



COMPANYNAME


Wiring instructions



WG26-34

WG card reader	RED		DV 12V	Access card reader
	BLACK		GND	
	GREEN		D0	
	WHITE		D1	
	BLUE		LED	
	YELLOW		BEEL	
	GREY		WG34	

This product is manual measurement, allowing errors ■

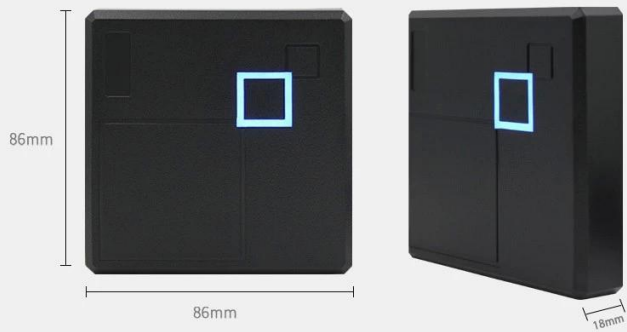

USAGE SCENARIO



Community gate



Office building gate



School gate



Elevator control system

gdzytech.en.alibaba.com