


| | |
|-------------------|---------------------------|
| Dimensions | 115Lx70Wx26H(mm) |
| Input | DC12V-24V |
| Contact Rating | 1A@36VDC |
| Output Contact | NO/NC/COM |
| Mechanical Life | 500000 tests |
| Suitable for Door | Hollow Door |
| Operating temp | -20°C~+55°C(14-131F) |
| Suitable Humidity | 0-95% (relative humidity) |
| Detection range | 0.1~10cm |
| | |
| Unit Weight | 0.11KG |
| Standard Package | 100PCS/carton |
| Carton Weight | 11KG |
| Carton Size | 51*43*33(cm) |

Product Dimensions



Wiring Diagram

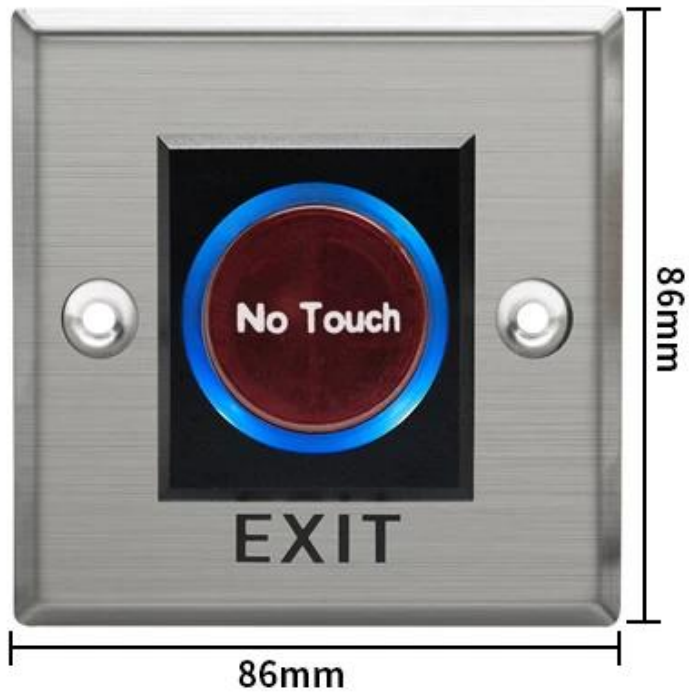