Descrizione del prodotto

Descrizione del prodotto

Caratteristiche:
1. Lettura e scrittura in un'area limitata dell'apparecchiatura sopra 0-60 CM dello spazio ristretto;
2. Fornire setup SDK e può fornire routine di sviluppo C #, VC, VB, Java;
3. L'area EPC, le prenotazioni, la funzione di sblocco del supporto dell'area utente possono essere utilizzate per esigenze di privacy e sicurezza di alta qualità;
4. Supporta la funzione discriminante adiacente, può impedire con una carta in breve tempo (1-255 secondi regolabili) ripetere il caricamento all'interno;
5. Supporta operazioni di scrittura veloce, convenienti per la lettura e la scrittura.
Descrizione del prodotto:

Specifiche	
Frequenza di lavoro	902 ~ 928 MHz o 865 ~ 868 MHz
Protocollo	ISO18000-6C (EPC C1 GEN2)
Porta di comunicazione	USB sinistro alla porta seriale / USB destro all'uscita dati
Software e SDK	DEMO e C #, VC, VB, Java, DELPH, ecc.,
Crittografia	Può essere crittografato direttamente, prevenzione della copia.
Intervallo di lettura	Lettura stabile 0 ~ 60 cm
Gamma di scrittura	Scrittura stabile 0 ~ 10 cm
Parametri fisici	
Adattatore	USB
Potenza di uscita	0 ~ 17dBm
Temperatura di lavoro	-20 ℃ ~ + 55 ℃
Temperatura di conservazione	-20℃~ + 55℃
Dimensione dell'articolo	142x 85x20mm
Dimensione del pacchetto	180x120x50mm
Peso netto	500g
Materiale guscio	addominali

Esposizione dei prodotti:

UHF
SPEEDWORK

Back Design in Black

Interfaccia software:

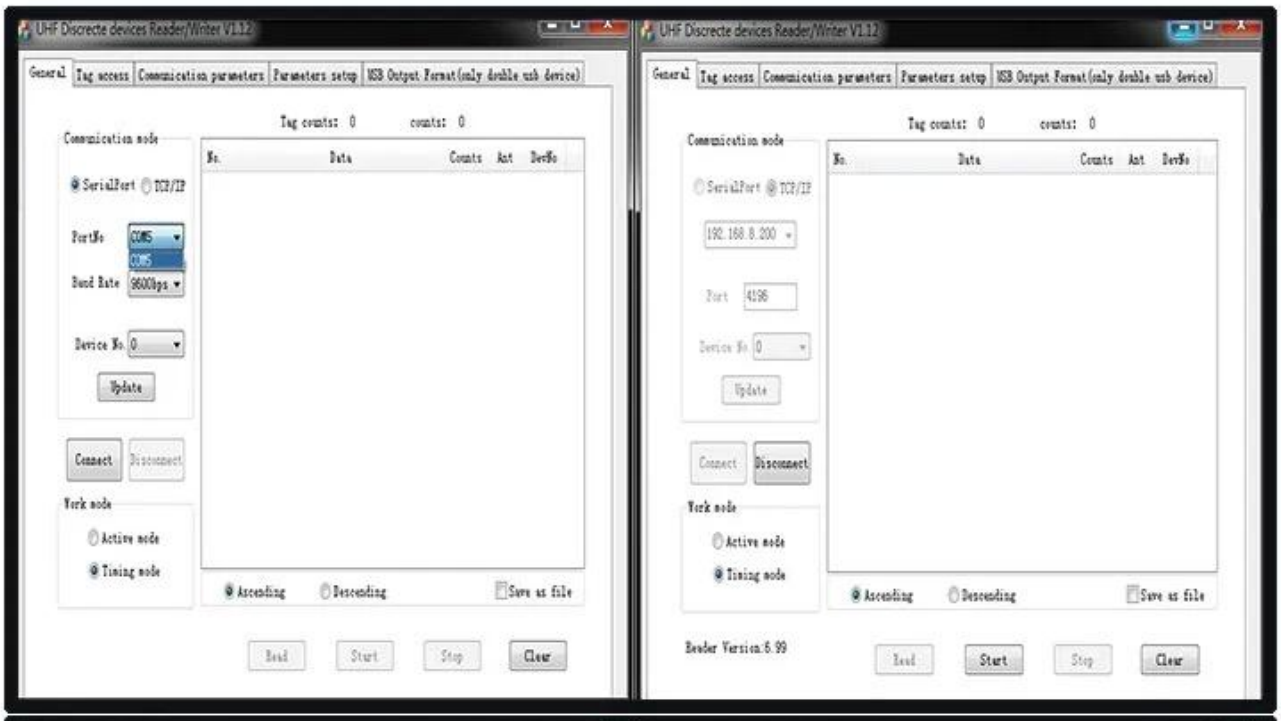
UHF Discrecte devices Reader/Writer V1.12
General
Tag access
Communication parameters
Parameters setup
USB Output Format(only double usb device)
Tag counts: 0
counts: 0
Communication mode
SerialPort
TCP/IP
PortNo
COM5
COM5
Baud Rate
9600bps
Device No.
0
Update
Connect
Disconnect
Work mode
Active mode
Timing mode
No.
Data
Counts
Ant
DevNo
Ascending
Descending
Save as file
Read
Start
Stop
Clear
192.168.8.200
Port
4196
Reader Version:6.99

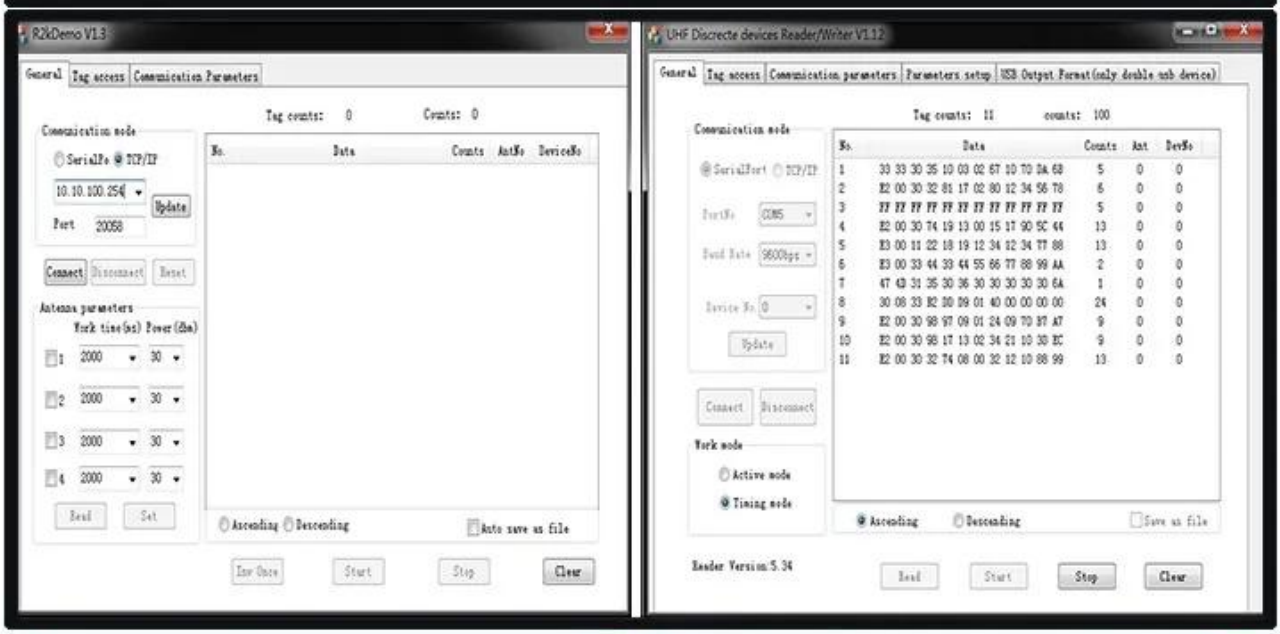
R2kDemo V1.3
General
Tag access
Communication Parameters
Tag counts: 0
Counts: 0
Communication mode
SerialPo
TCP/IP
10.10.100.254
Update
Port
20058
Connect
Disconnect
Reset
Antenna parameters
Work time(ms)
Power(dbm)
1
2000
30
2
2000
30
3
2000
30
4
2000
30
Read
Set
No.
Data
Counts
AntNo
DeviceNo
Ascending
Descending
Auto save as file
Inv Once
Start
Stop
Clear
UHF Discrecte devices Reader/Writer V1.12
Tag counts: 11
counts: 100
1 30 33 30 35 10 03 02 67 10 70 DA 68 5 0 0
2 E2 00 30 32 81 17 02 80 12 34 56 78 6 0 0
3 FF FF FF FF FF FF FF FF FF FF FF FF 5 0 0
4 E2 00 30 74 19 13 00 15 17 90 5C 44 13 0 0
5 E3 00 11 22 18 19 12 34 12 34 77 88 13 0 0
6 E3 00 33 44 33 44 55 66 77 88 99 AA 2 0 0
7 47 43 31 35 30 36 30 30 30 30 30 6A 1 0 0
8 30 08 33 B2 30 09 01 40 00 00 00 00 24 0 0
9 E2 00 30 98 97 09 01 24 09 70 B7 A7 9 0 0
10 E2 00 30 98 17 13 02 34 21 10 30 BC 9 0 0
11 E2 00 30 32 74 08 00 32 12 10 88 99 13 0 0
Reader Version:5.34
Read
Start
Stop
Clear

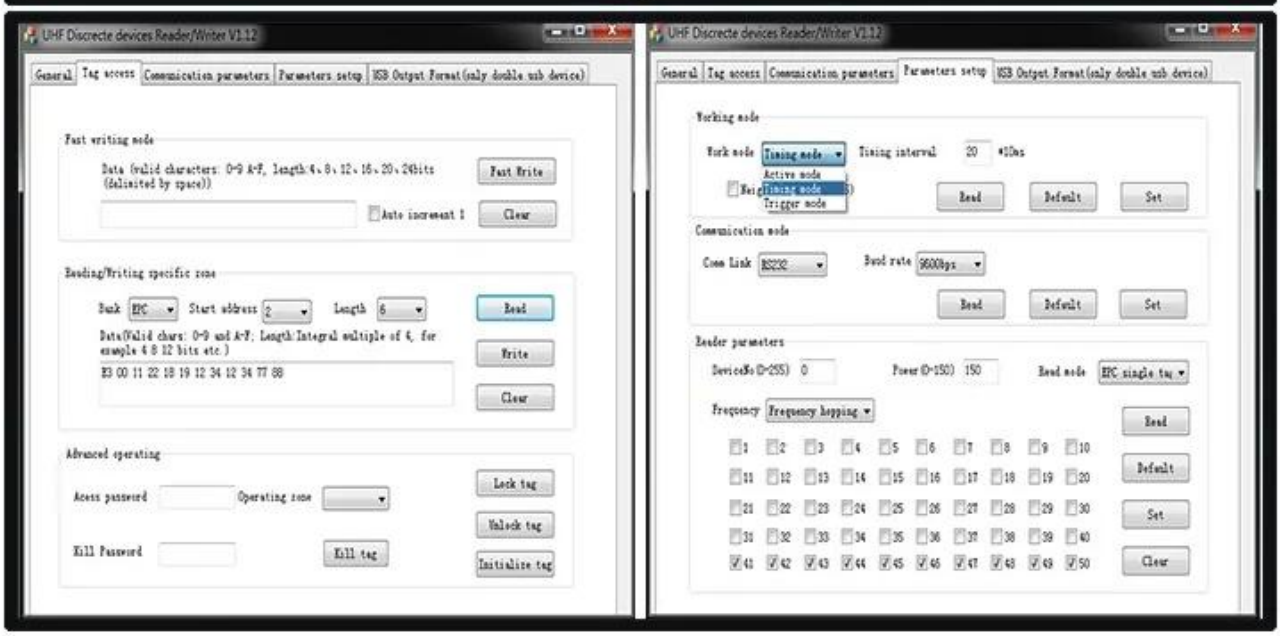
UHF Discrecte devices Reader/Writer V1.12
Fast writing mode
Fast Write
Auto increment 1
Clear
Reading/Writing specific zone
Bank
EPC
Start address
2
Length
6
Read
Write
Clear
E3 00 11 22 18 19 12 34 12 34 77 88
Advanced operating
Access password
Operating zone
Lock tag
Unlock tag
Kill Password
Kill tag
Initialize tag
Working mode
Work mode
Timing mode
Active mode
Trigger mode
Timing interval
20
*10ms
Read
Default
Set
Communication mode
Com Link
RS232
Baud rate
9600bps
Reader parameters
DeviceNo(0-255)
0
Power(0-150)
150
Read mode
EPC single tag
frequency
Frequency hopping
Clear

Applicazione:
Traffico intelligente come ETC;
Attraversamento doganale, parcheggio, ponderazione automatica;
Logistica come la gestione dei container, la gestione dei pallet, la gestione delle risorse ecc .;
Biglietteria e controllo degli accessi;
Prodotti farmaceutici come la gestione dei rifiuti sanitari, ecc.

prodotti correlati

Shenzhen Goldbridge si concentra sull'innovazione R & S, produzione e vendita di prodotti IOT RFID e soluzioni applicative, categoria di lettori rfid incluso scrittore lettore desktop UHF, lettore integrato UHF, lettore fisso UHF R2000, modulo OEM UHF, lettore portatile RFID, tag rfid uhf, lettore rfid 2.4G attivo, lettore EM 125KHZ a lungo raggio, hardware RFID industriale e software integrato, ha ottenuto la certificazione aziendale high-tech nazionale FCC, CE e ROHS.?

Raleted Long distance range RFID Reader & Tags

ACM-812A -8dBi 2-6 meter , 235x235x57mm	ACM-803A -9dbi 6-10 meters,260X260X45mm	ACM-811A-8dBi Muti-tag Reader, 6-9 meters, 255x255x45MM
ACM217-UHF UHF Reader and Writer - Provide Free program and SDK	ACM919L 4 Ports UHF Reader Impinj R2000 ,270mm*180mm*27mm	ACM-819A-12dBi Muti-tag Reader, 10-20 meters, 460x460x55MM
ACM8017 UHF Handheld Reader UHF +WIFI+GRPS Quad Band+Barcode 1D/2D	ACM09G-TCP/IP Or Wiegand Active 2.4G Reader 30-70meter, Provide FREE SDK and Demo	ACM08Y RFID EM 125Khz 70cm-1meter Middle long range Reader
ACM-MU85M One Antenna Port Module- 30dbm adjustable 0-15m used for handheld reader. ,55.5x39.5x7.6mm	ACM-MU82M 4 Antennas Ports Module 4ports 25m speed anti-collision impinj R2000 67.5mmx51mmx7.9mm	ACM-MU13M One Port Module Korea certificate 0-15m Size: 8x25x3.5mm
UHF Anti-metal Tag, ACM-UHF-M3: 135x22x12mm ±2mm	Anti-tamper windshield sticker tag (ACM-S001)	UHF ISO PVC Card Tag , 86x54mm (ACM-UHF Card)

Email: sales@goldbridgesz.com Web: http://www.goldbridgesz.com

About Us

Similar Products

GOLDBRIDGE

SHENZHEN GOLDBRIDGE INDUSTRIAL CO.,LTD

ACM Shenzhen Goldbridge
industrial company

As a one of leading exporter and manufactuer of RFID products in China , . We have been in this field for 17 years already . We have rich production and exportation experience on RFID products . Our strength products are : RFID card , RFID keyfob , RFID wristband , RFID tag and various RFID reader . We are also the access control solution provider .

FACTORY PHOTOS

Our Certificate

>>