

Descrizione del prodotto



Lettore di prossimità per controllo accessi comunitario impermeabile IP68 Wiegand 26 Lettore di schede di controllo accessi RFID ID EM Card da 125 Khz

ACM-08E è un lettore di carte ID Wiegand senza contatto da 125 KHz, che utilizza un design avanzato del circuito di ricezione a radiofrequenza e integrato microcontrollore, combinato con un efficiente algoritmo di decodifica, per completare la carta d'identità compatibile em4100 di sola lettura a 64 bit (EM scheda) ha le caratteristiche di elevata sensibilità di ricezione, bassa corrente di lavoro, singola alimentazione CC, prezzo basso e alta prestazione. Il design a prova di polvere, umidità e completamente sigillato è conveniente per gli utenti da installare in condizioni difficili come

come all'aperto, senza usura meccanica ed
è durevole.

N
G
M
e
8
D
d
i
m
o
d
e
l
l
o
F
2
5
K
H
e
n
z
a
T
2
m
p
e
5
aC
t
u
r
a
o
p
e
r
a
t
i
v
a
G
m
%
d
i
t
à
o
p
e
r
a
t
i
v
a

U
E
h
2
V
o
n
e
d
i
l
a
v
o
r
o
C
m
A
h
e
n
t
e
d
i
l
a
v
o
r
o

m
m
t
e
m
m
a
l
l
p
d
n
l
e
d
a
h
r
a
a
m
b
i
e
n
t
e
d
i
u
t
i
l
i
z
z
o
d
e
l
l
a
s
c
h
e
d
a
)
C
e
r
o
r
e
B
6
m
8
n
s
i
8
h
m
i
l
l
i
m
e
t
r
o
)

C
à
p
b
d
il
c
à
d
e
a
t
i
t
à
(
T
K
4
1
/
E
M
4
1
e
c
c
.)

M
B
S
e
p
l
a
b
e
i
c
a
s
p
r
u
z
a
t
a
,
r
i
e
m
p
i
t
i
c
o
n
c
o
l
l
a
i
n
r
e
s
i
n
a
n
e
r
a
(
e
f
f
i
c
a
c
e
m
e
n
t
e
i
m
p
e
r
m
e
a
b
i
l
e
)

A
l
t
a
p
h
n
b
a
p
t
ò
t
n
h
e
g
o
h
t
a
r
e
L
E
D
e
c
i
c
a
l
i
n
o
P
è
S
o

Immagini dettagliate

EASY INSTALLATION

Stable performance, firm and durable
wall-mounted installation



1. Draw marks and punch holes



2. Upper screws secure the rear cover



3. Mounting front cover

4. Screw the screws on the bottom




IT CAN ALSO BE INSTALLED OUTDOORS




IP68 PROTECTION DESIGN

The inside of the reading head is filled with glue, fully
waterproof, rainproof, and high protection level


Two-color indicator light



Standby mode



Trigger state



IP68 PROTECTION



Sealer resin adhesive



Finished product

Flame retardant material



SUPPORT FOR CUSTOM

Products also provide logo shell customization

ODM



LOGO CUSTOMIZATION



COMPANYNAME



COMPANYNAME



COMPANYNAME



COMPANYNAME


Wiring instructions



WG26-34

WG card reader	RED		DV 12V	Access card reader
	BLACK		GND	
	GREEN		D0	
	WHITE		D1	
	BLUE		LED	
	YELLOW		BEEL	
	GREY		WG34	

This product is manual measurement, allowing errors ■

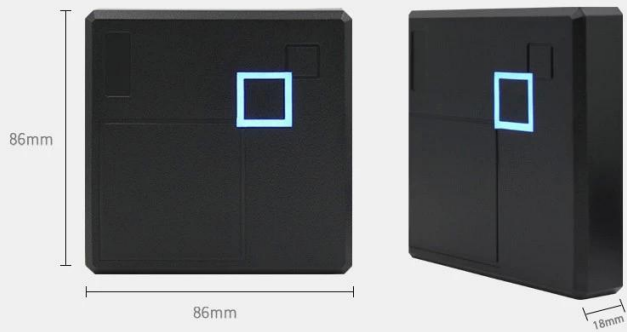

USAGE SCENARIO



Community gate



Office building gate



School gate



Elevator control system

gdzytech.en.alibaba.com