

- 環境問題
 - 環境問題の重要性を認識し、持続可能な開発目標（SDGs）を推進する。
 - 環境問題の解決には、政府、企業、市民の協力が不可欠である。
- 社会問題
 - 社会問題の解決には、政府、企業、市民の協力が不可欠である。
 - 社会問題の解決には、政府、企業、市民の協力が不可欠である。

工作频率	79GHz
电压	12V
功耗	2.5W
工作温度	25°C~98°C
尺寸	1m×6m
重量	<2.5W
接口	105x73x20mm
存储温度	-40°C -85°C

[illegible]

New 79G barrier radar

Anti-smashing radar

WeChat applet debugging/no wire cutting and wiring/
online upgrade with one-click setting



Eight major advantages

Easy to use



Millimeter wave detection

79G millimeter wave detection frequency is more accurate



High efficiency and stability

High sensitivity and high vehicle detection rate



Long lifespan

High and low temperature resistance, military quality



Automatically adapt to the environment

Suitable for various severe weather conditions such as heavy rain



Smart radar

Easy to install and maintain



Mobile phone debugging

Bluetooth connection applet debugging



Safe and reliable

Intelligent identification of vehicles and people




Easy to install

No need to cut the ground, instead of traditional ground sensor


Radar is newly upgraded

Supports WeChat applet debugging

A more convenient and worry-free setting method

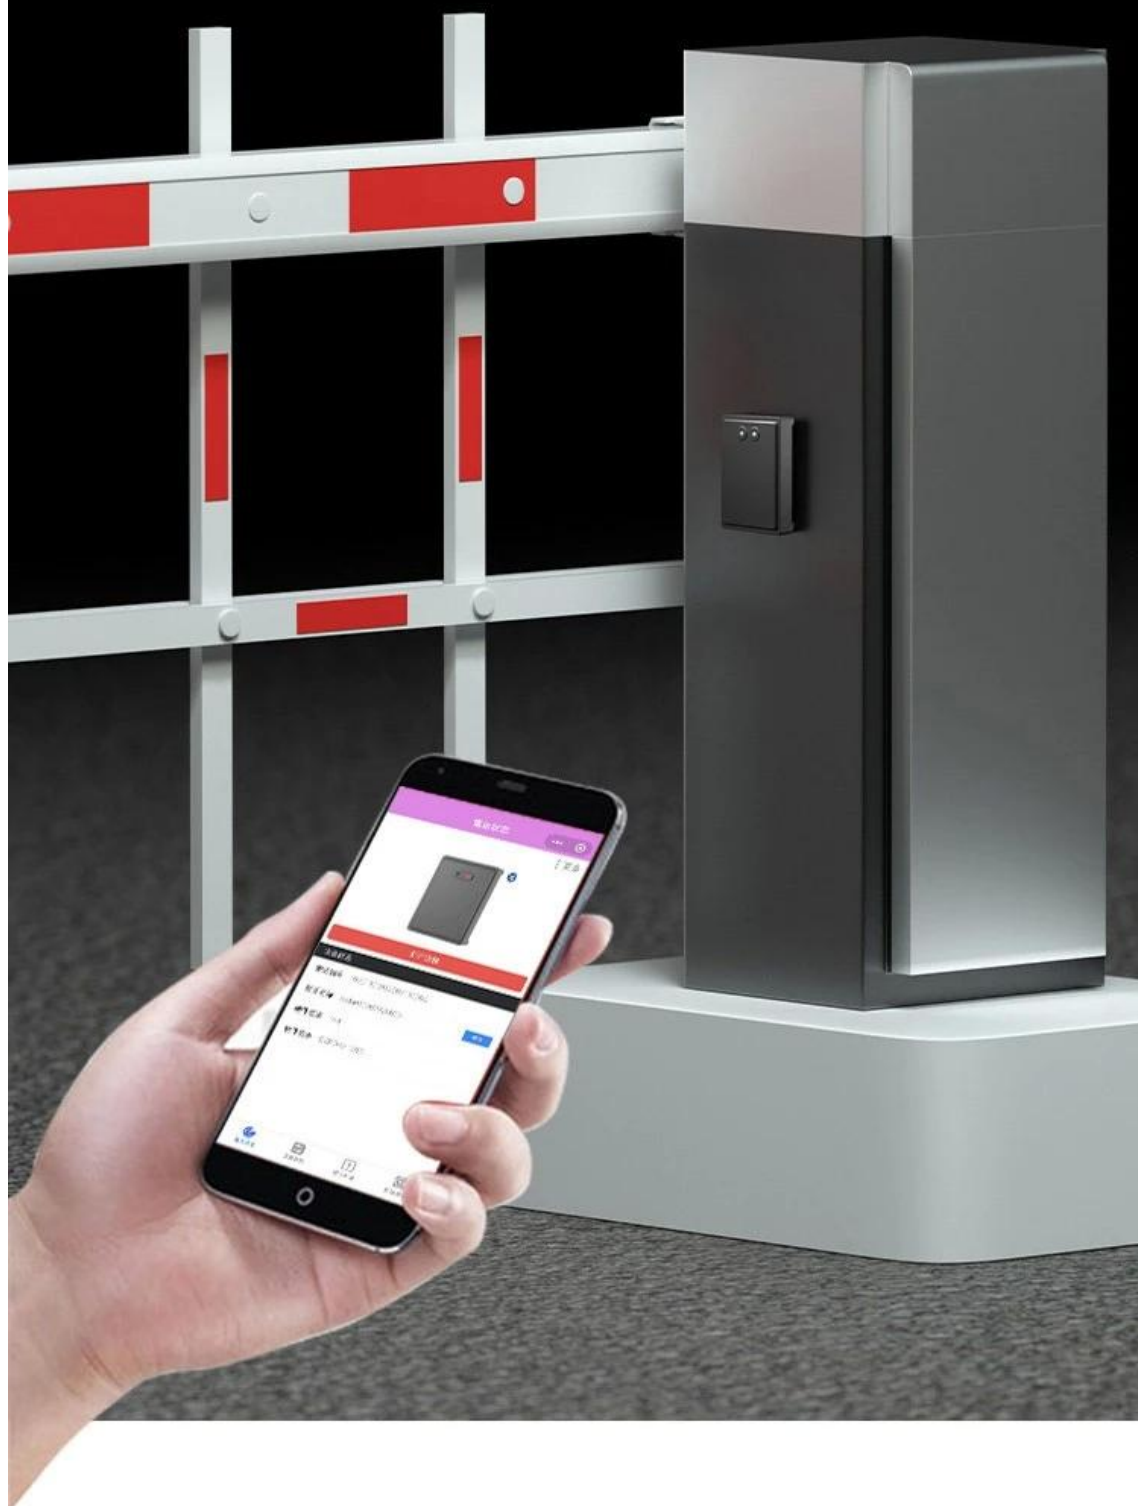

Nine functions



79G ANTI-SMASHING
RADAR CHIP



BLUETOOTH
DEBUGGING



ANTI-SMASHING PEOPLE
AND CARS



SUITABLE FOR VARIOUS
ENVIRONMENTS



STRONG
STABILITY



EASY TO
INSTALL



HIGHLY
SENSITIVE



WIDE RANGE OF
APPLICATIONS



PRECISE
IDENTIFICATION

Millimeter wave radar

Sensitive sensing to prevent people and cars from being hit

A gate radar with stable performance, safety and reliability



The radar is compatible with a variety of gate machines

Applicable to straight-pole gates/fence gates/advertising gates/airborne gates
It can achieve high-precision anti-interference, strong anti-smashing,
safe and reliable features



Straight pole



Fence pole



Advertising pole



Airdrop gate

Are you often troubled by the following problems???



Grooving construction
Time-consuming and
labor-intensive



Messy line
Complex and difficult
to connect



Poor sensitivity
Cannot respond to the
car




Installation and
maintenance are
complex

Anti-smashing radar helps you say goodbye to the tedious operations you encounter,
saving time and effort!

■ Install Detector


The loop detectors must only be placed in dry rooms or control cabinets that are protected against all types of moisture and wetness. A distance of at least 10 mm from other devices must be maintained on each side. The ambient temperature must not exceed 65° C. The installation of the induction loop is described in other operating instructions.

■ Wiring Diagram

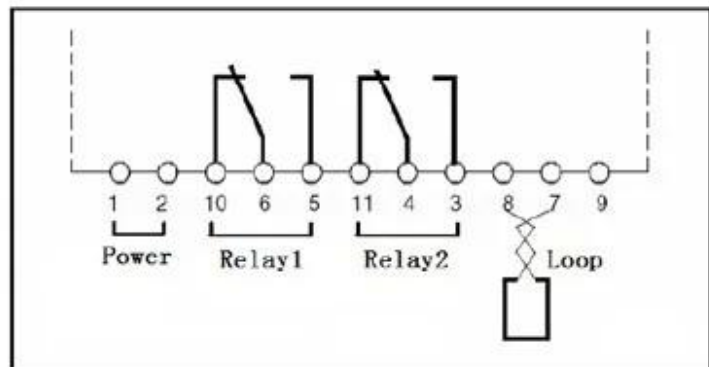

■ Operation and Indication

When the power is applied, the red Power LED will glow and the detector is tuning, the green Check LED blink about 3 seconds. The green LED will also glow whenever a vehicle is detected passing over the inductive loop. If a loop fault exists the green LED will come on and flash indicating a fault.

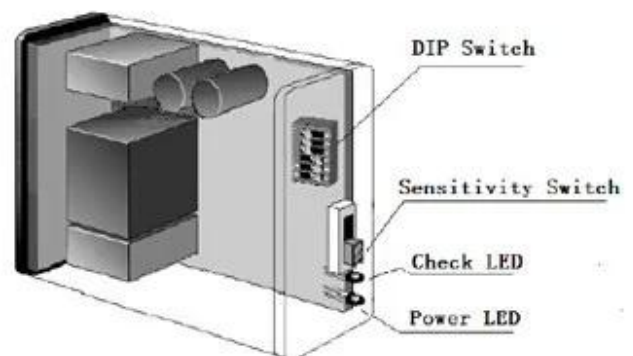

□□□□□□UHF□□□□□□□□□□ACM812A□□□□ACM802A□ACM818A□ACM801A□□□□□□□□□□□□□□
□□□□□□□ACM801A□□□□□□□□□□□□200 PC□□□□□□□□□□□□□□□□□□□□□□□□





ACM812A

2-5m□□□□□□□□□□UHF□□□□

Wiegand 26□□□RS232/485

ACM818A

10-20m□□□□□UHF□□□□

Wiegand 26□□□RS232/485

ACM802A

8-10m□□□□□□□□UHF□□□□

Wiegand 26□□□RS232/485



10-15m UHF
Wiegand 26RS232/485
ACM 8017
UHF
uhfwifgrps
ACM 918K
UHF 4-Antenna

1. 產品規格

1. 產品規格 24
2. 產品規格
3. OEM/ODM
4. 產品規格
5. 產品規格
1. 產品規格
2. 產品規格
3. 產品規格 2-3
6. 產品規格 15
7. 產品規格 T/T Western Union PayPal

2. 產品規格

Q1
A

Q2
A T/T PayPal Western Union
DHL FedEx TNT UPS

Q3
A

Q4
A 5000pcs 3 7 100,000pcs 7 15

Q5
A OEM

Q6
RFID NFC RFID RFID RFID RFID 1