



Wiegand 1 2 3 4 5 6 7 8 9 * 0 #
RFID 1 2 3 4 5 6 7 8 9 * 0 #

ACM-A30 1 2 3 4 5 6 7 8 9 * 0 #
1 Wiegand 1 2 3 4 5 6 7 8 9 * 0 #
1 2 3 4 5 6 7 8 9 * 0 #



1
2
V
D
C
+
1
0

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100

Product function

- ◆ Touch panel, doorbell button
- ◆ Metal case with blue backlight
- ◆ WG26/34 input/output
- ◆ Support Card, Pin, Card + PIN
- ◆ Full programming from the keypad
- ◆ Humanized tamper alarm function
- ◆ Can set up a management card
- ◆ Active and passive lock signal output
- ◆ Imported double point relay output signal
- ◆ Contactless for RFID transponder technology
- ◆ Connection for external release button (Exit button)
- ◆ Memory capacity: 8000 user cards and 1 passwords
- ◆ Does not need to connect on computer, it can works alone
- ◆ The same series of access control support data copy and backup
- ◆ Can be used when the password read head and one machine



ACM-A30 Rfid 8000 LED



Red Bronze



Green Bronze



Golden



Silver



White Bronze




Wiegand 26/34

ACM-A30 Model



Wiring diagram

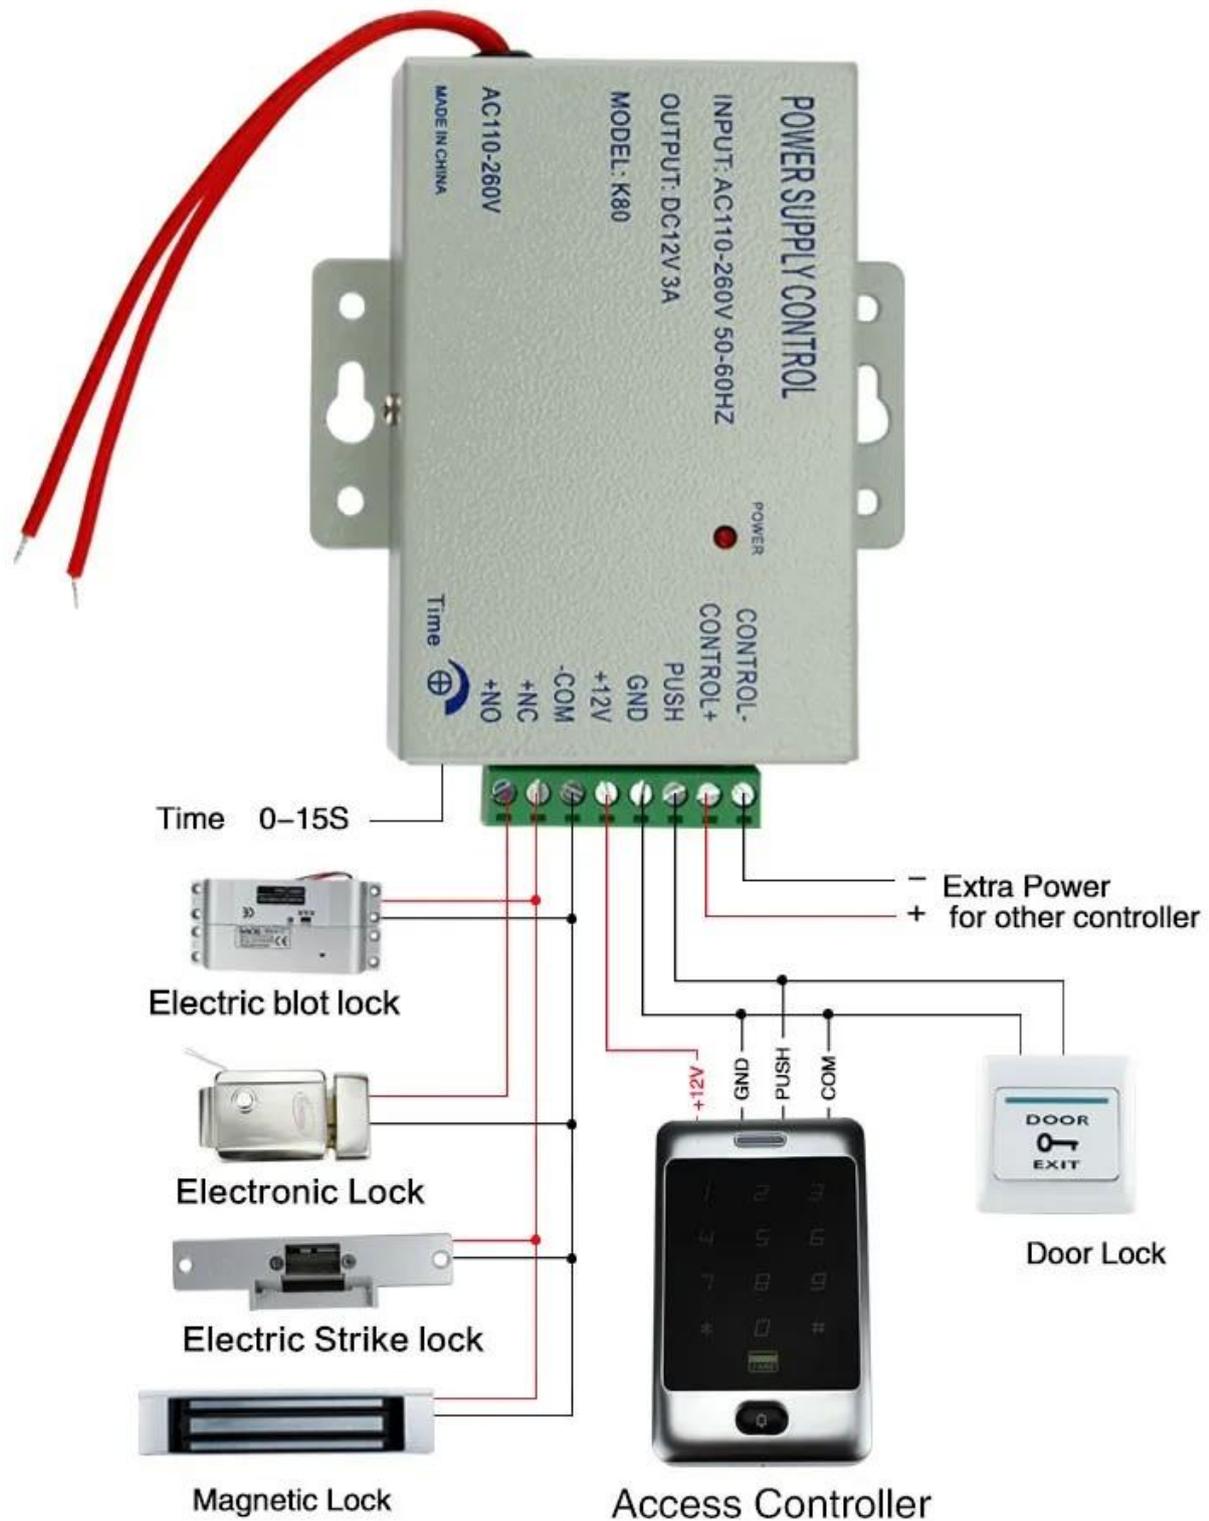

Attention when electronically controlled lock must be transferred to 0 seconds delay, to prevent burning of electric lock.

125Khz EM

ACM208

RFID



ACM210

RFID

ACM225

RFID 125Khz EM

ACM211B

RFID
wiegand connect



- 1 24
- 2
- 3 OEM / ODM
- 4 fashin desing &
- 5
- 1
- 2
- 3 2 - 3
- 6 1 5 7 30
- 7 T / T
- 8 DHL FEDERAL EXPRESS TNT UPS EMS



Q1.

A

Q2.

A T / T
DHL Federal Express TNT UPS

Q3.

A

Q4.

A 5000pcs 3-7 100,000pcs 7-15

Q5.

A OEM

Q6.

RFID / NFC / RFID keybod / RFID rfid 1

