


IP68 13.56MHz 26

	DC12V±
	10
	2000

□□ □□ □□ □□ □	3□6cm
□□ □□	<60mA
□□ □□ □□	25±5mA
□□ □□ □□ □□ □	□□3A
□□ □□ □□ □	□□20A
□□ □□	-45°□60°
□□ □□	10□□90□ □□RH
□□	IP68□□□
□□ □□ □□ □□ □□ □□	0□99□
□□ □□ □□ □□ □□ □	0□3□

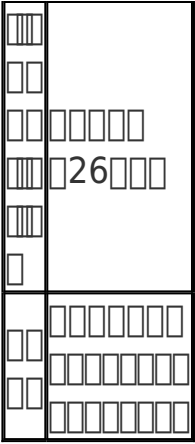

||

	BELL_A	
	BELL_B	
	D0	WG D0
	D1	WG D1
		12V +
		GND
	D_IN	GND
	12V +	12V + DC
	GND	12V-DC
	COM	GND
	NC	


||

IP68
 2000 PIN + PIN
 PIN

! 26
! 26
! 30mA
! <20ms with 2000 users
! LDR
! LED

!!

IP68
4 PIN + PIN 2000
13.56MHz MF

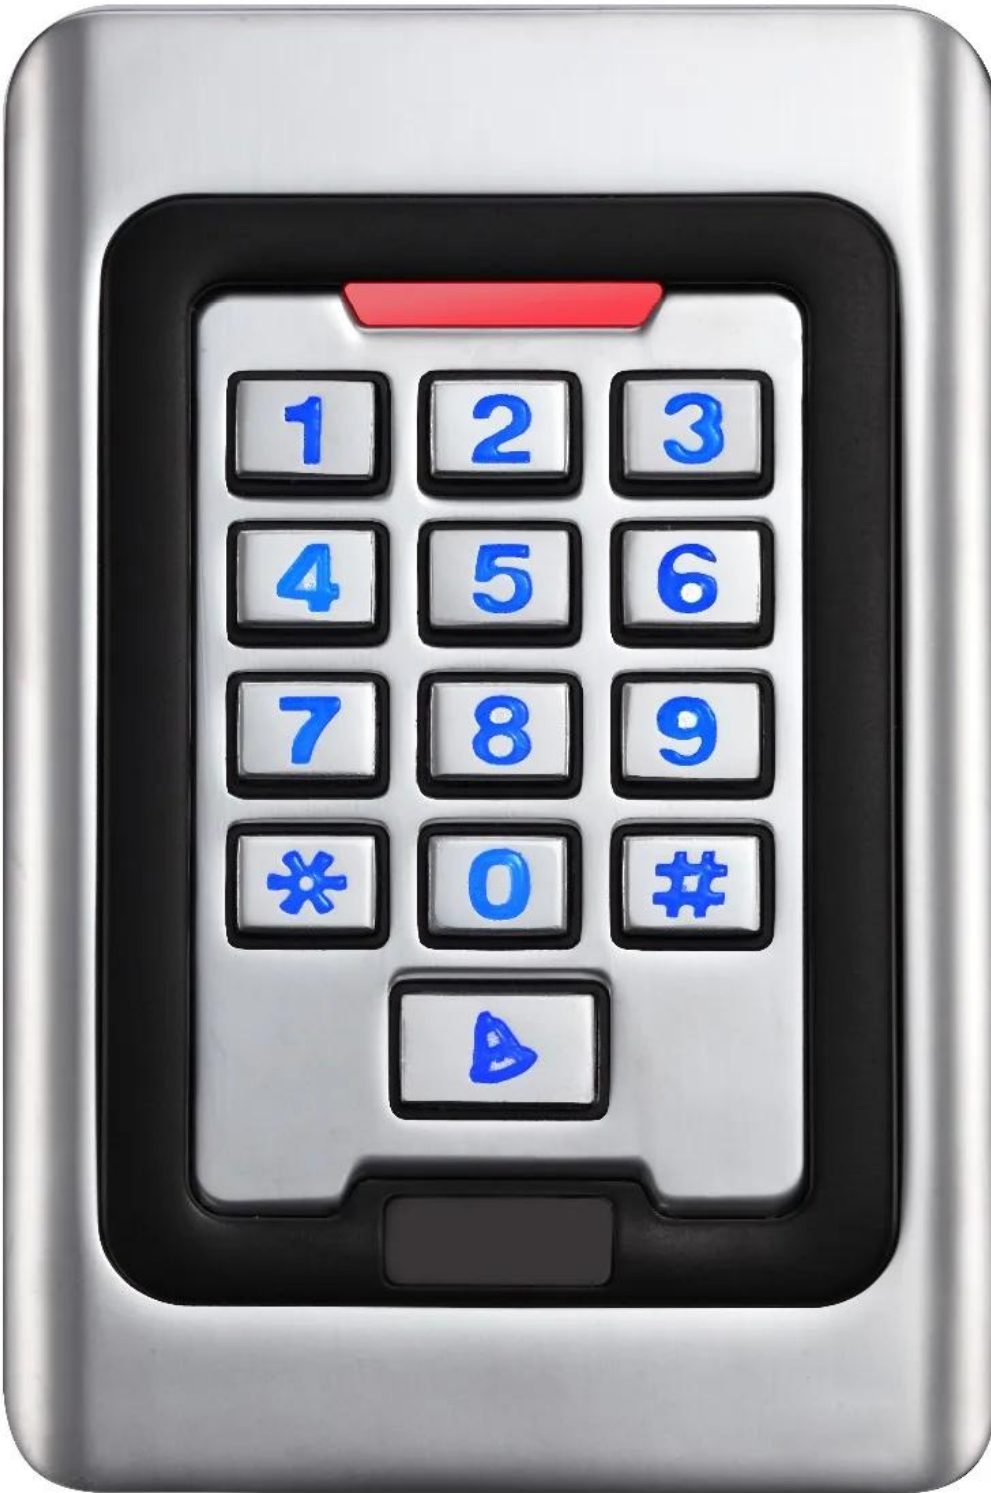

1

2

3

4

5

6

7

8

9

*

0

#

Ⓜ



Q1

A

Q2

A T / T Paypal DHL FedEx TNT UPS

Q3

A

Q4

A 5000 3 7 100,000 7 15

Q5

A OEM

Q6

A RFID / NFC / RFID / RFID RFID 20 1