□□□□

1 2 3
4 5 6
7 8 9
* 0 #

1
2
3
4
5
6
7
8
9
*
#

71MM
110MM
1 2 3
4 5 6
7 8 9
* 0 #
15MM
FC CE RoHS

Product parameters

Specifications:

Card type: EM
Working voltage: DC12V±10%
Reading Range:3-6cm
Humidity: 10% to 90% RH
Door Opening Time:0-99s(Adjustable)
Static electricity: ⩽30mA
Ambient temperature: -45 °C ~ 60 °C
Electric lock output: ⩽1A
Short-circuit Protect: ⩽100μS
Dimensions: 114*75*16mm

T12

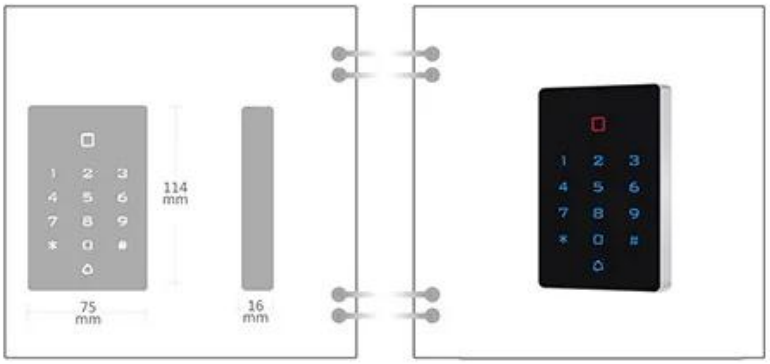

Product Feature

◆Digital backlit touch keypad
◆Multi-function standalone access controller and reader,
◆WG interface: WG26 Input / output
◆Capacity: 2000 cards / codes
◆Three accesses: card, pin, card + pin

PRODUCT DETAILS

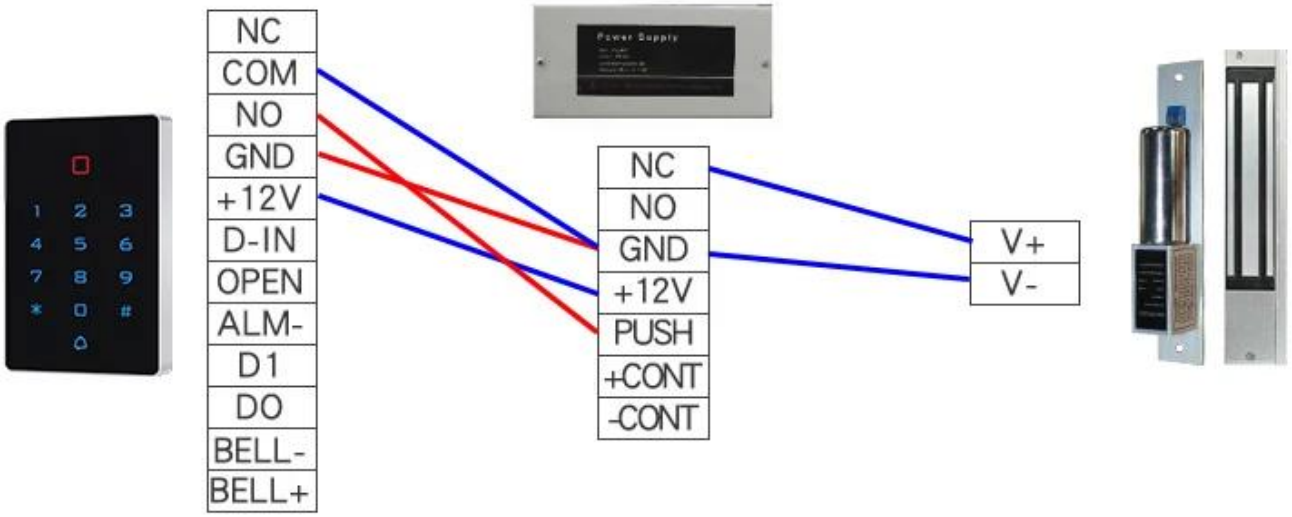

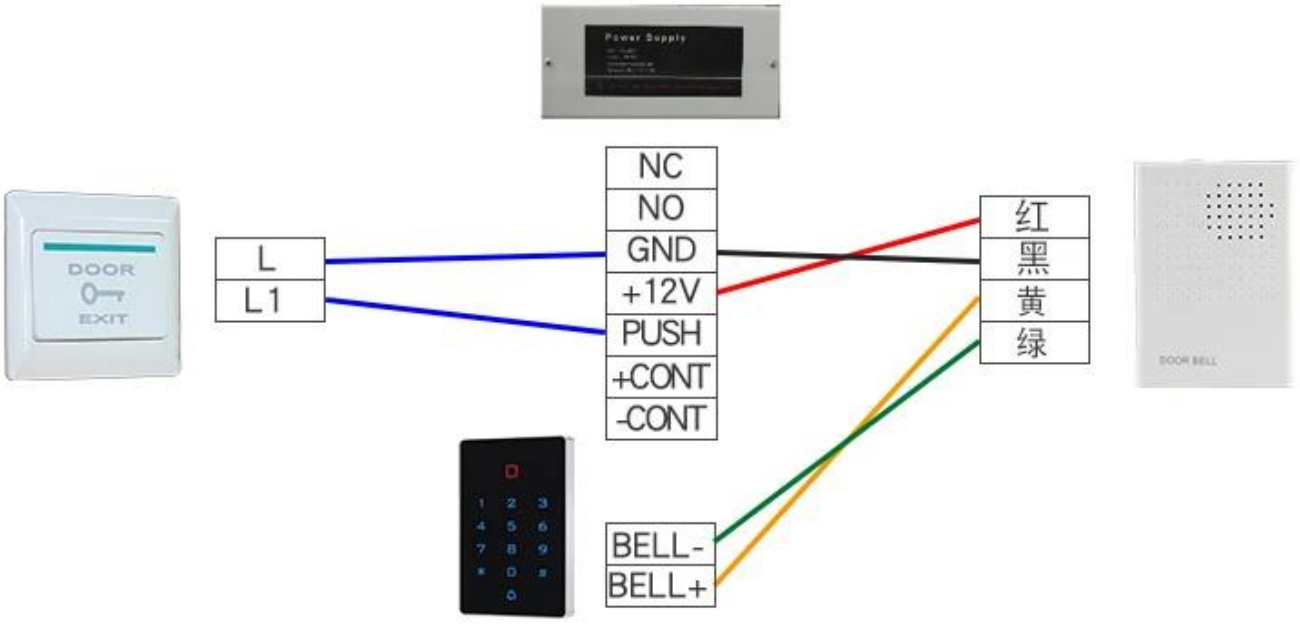

Power Supply
1 2 3
4 5 6
7 8 9
* 0 #
DOOR
EXIT

□□	□□□□□□□□□□□
□□□	125KHZ
□□□	110 * 71 * 15mm
□□□□	DC 12V
□□□	30MA

□□□□□□□

1□□□□□□□□24□□□□□□□□□□□□
2□□□□□□□□□□□□