



1 ISO18000-6C EPC C1G2
ISO18000-6B
2 ISO-18000B EPC
3 5M-10M
4 SDK
5 Wiegand 26 rs232 / 485 TCP /

Read order

A
C
M
8
1
3
A
□
~~RU~~□
□□
□□
M□
-
1
M
□
□
~~RU~~□
□□
□□
8
6
-
9
6
M
H
Z

[illegible]

☐ R S - 2 3 2
☒ W i g a n d 2 6
☐ \ 3 2
☐
☐

-

Interface:

- Standard interface have RS232,RS485 and Wiegand 26



WIRING GIAGRAM

PWR +12V	GND	232 TXD	232 RXD	GND	WG1 D0	WG1 D1	WG2 D0	WG2 D1	TRIG T+	TRIG T-
RED	BLACK	WHITE	PURPLE	BLACK	YELLOW	GREEN	ORANGE	BROWN	BLUE	BLACK

PWR +12V	GND	232 TXD	232 RXD	GND	WG1 D0	WG1 D1	WG2 D0	WG2 D1	TRIG T+	TRIG T-
RED	BLACK	WHITE	PURPLE	BLACK	YELLOW	GREEN	ORANGE	BROWN	BLUE	BLACK



UHF RFID 860-960Mhz UHF USB RFID

- 1 □ □ □ □ □ □
2 □ □ □ □
3 □ □ □ □ □ □

4
5
6
7
8



Vehicle access control system



Personal ID access control



Hand free applications



Asset management




Application



UHF CARD



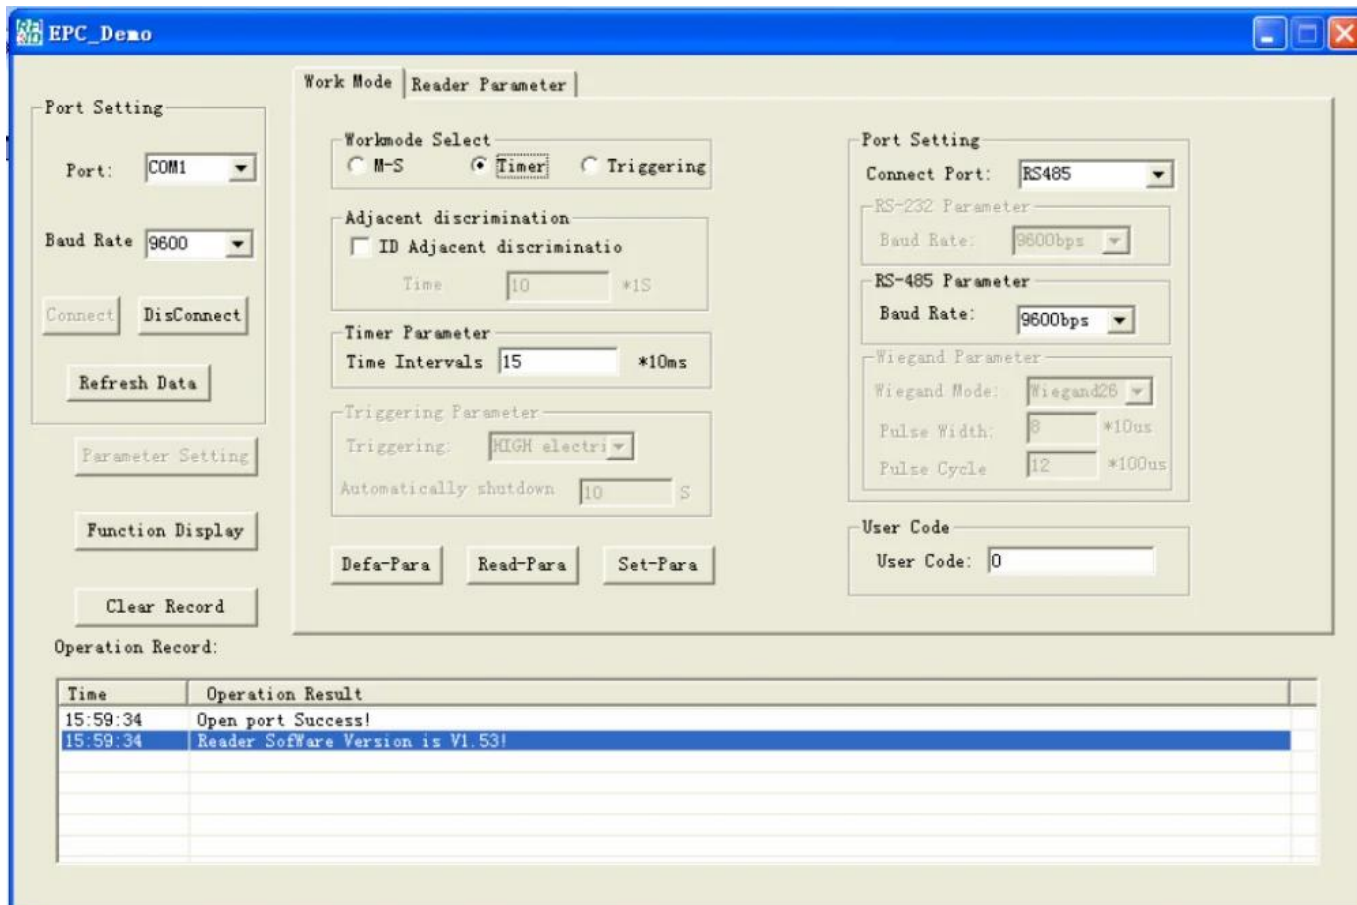



□□□□□

□□□□□□
UHF□□□□□□□□□□1□□□□1□□□□□1□□□□□□□□10□□□□
□□□□□□□□32 * 32 * 6cm□□□□□5kg□

製品紹介

ACM812Aはuhf帯域対応のACM802A、ACM818A、ACM801Aの兄弟製品として、
ACM801Aの200W出力に対応した製品です。





ACM812A
2-5m UHF
26 RS232 / 485

ACM818A
10-20m UHF
26 RS232 / 485

ACM802A
8-10m UHF
26 RS232 / 485





ACM801A
10-15m UHF
2600RS232 / 485

ACM 8017
UHF
UHF + WIFI + GRPS

ACM 918K
UHF 4

1. 100% 24
2. OEM / ODM
3. 2-3
4. 1-5 7-30
5. T / T Paypal

Q1. 100% 24

A. 100% 24

Q2. T / T Paypal
DHL FedEx TNT UPS

Q3. 100% 24

Q4. 100% 24

Q5. 100% 24

Q6. 100% 24