



□ □

ACM K3

□□□□□□□□□□



[illegible]

□□□□□□□□□□□□□□

□□□□□□□□□□□□□□/□□/□□/□□□□□□

··□□□□□□□□□□□□□□3A / AC120V□DC30V□

□□□□□□□□□□□□□□□□□□□□□□□□□□


□□□□□□□□□□□□□□□□□□□□□□□□□□LED□□□□□□□□□□

□1□□□□□□□□□□□□□□□□□□□□□□□□□□LED□□□□

□2□10cm□□□□□□□□□□□□□□□□□□□□□□□□□□LED□□□□


□□□□



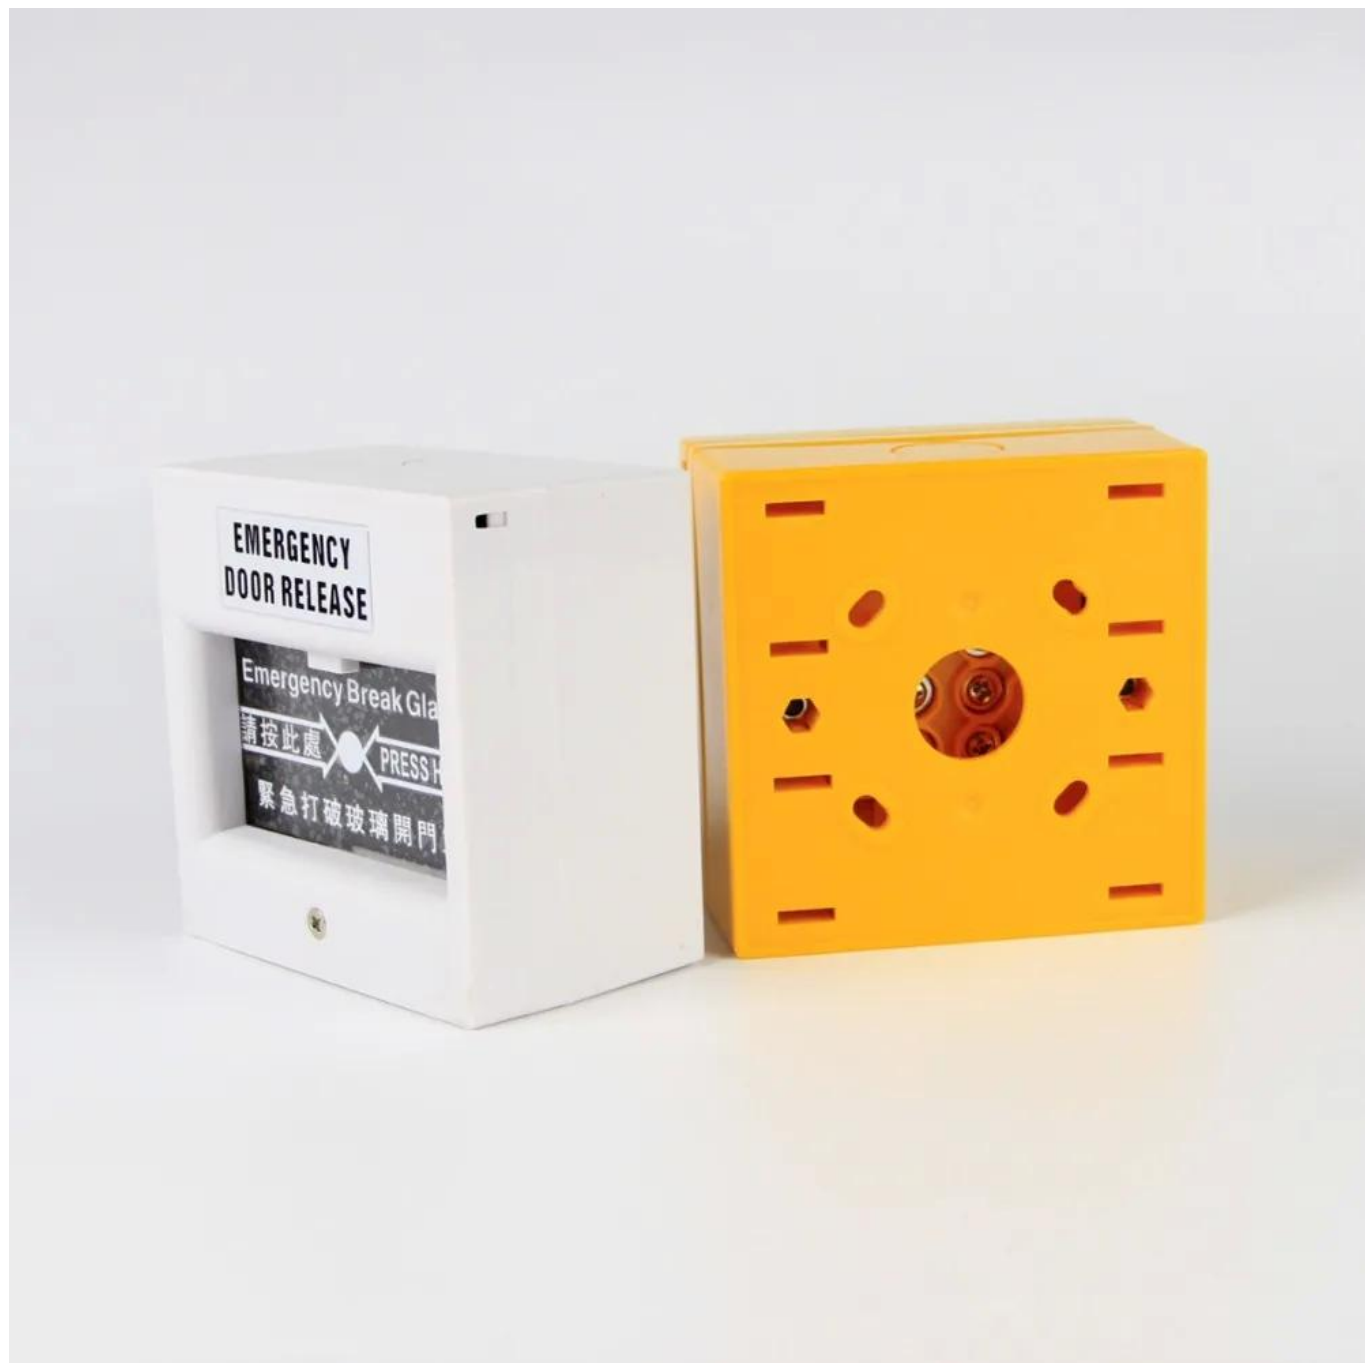


SPECIFICATION

- * Size: 86Lx86Wx50H(mm)
- * Current Rating: 3A@36VDC Max
- * Suitable for Door: Exit Door, Emergency Door
- * Material Selection: Fireproof Material,
Sandblast Finished
- * Standard Structure: Fireproof Material,
Easy to install.
- * Output Contact: NO/NC/COM
- * Optional Accessories: Glass, Cover
- * Color: A.green B.orange C.red D.white
- * Weight: 0.2kg




WIRING DIAGRAM

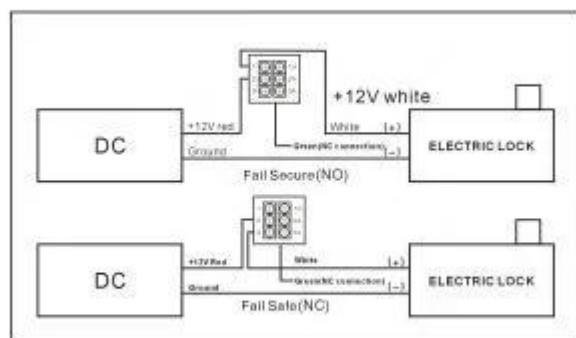


SPECIFICATION

- * Size: 86(L)x86(W)x50(H)(mm)
- * Current Rating: 3A@36VDC Max
- * Suitable for Door: Exit Door, Emergency Door
- * Material Selection: Fireproof Material,
Sandblast Finished
- * Standard Structure: Fireproof Material,
Easy to install.
- * Output Contact: NO/NC/COM
- * Optional Accessories: Glass, Cover
- * Color: A.green B.orange C.red D.white
- * Weight: 0.2kg



WIRING DIAGRAM

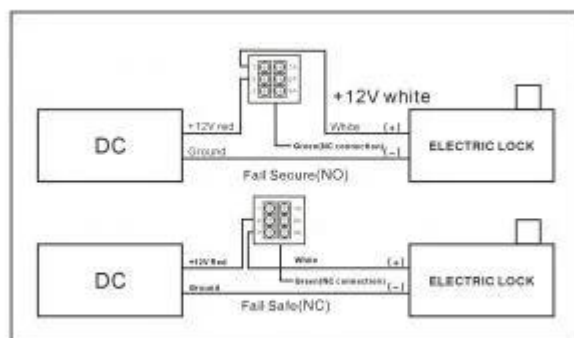

□□□□□□□□□□□3□□□□□□□□□□□□□□□!!!

20
[]
[]






□□□□□

□□□□□□□□

□□□□□□□□0.25 kg

□□□□□□□□10cm x 10cm x 8cm

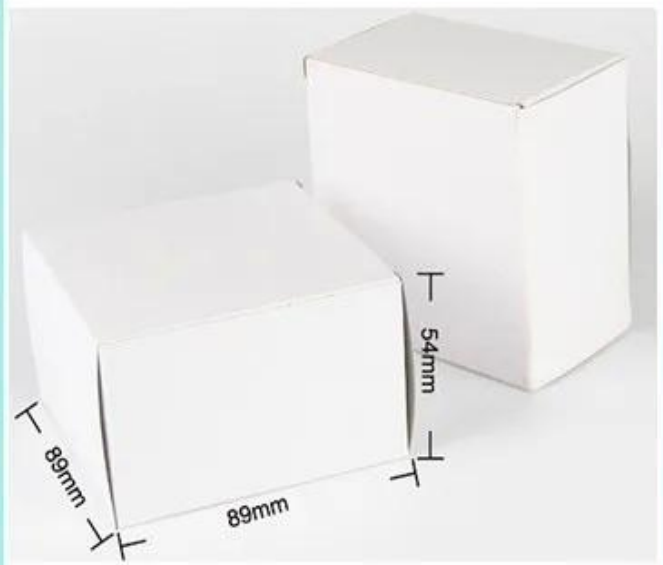





□□□□□RealeseDoor No Touch

K2B□86 * 86mm

Realese Door NoTouch□□□□□□

K9A□115 * 40 mm

□□□□□□□□□□□□□□□□NO /

NC□K5B□86 * 86mm

* 86mm

--	--	--	--	--	--	--

[illegible]

--	--	--	--	--	--

[illegible]