



支持TCP / IP、WG26-TCP

S

TCP / IP、TCP SERVER / CLIENT、UDPSERVER / CLIENT

IP地址: 192.168.0.7

端口: 20108

尺寸: 83×71×25mm

接口

支持RS232、RS485、USB、16、IP、PC


2、RJ45、2、Wiegand26、Wiegand34

TCP / IP

1. 10 / 100M
 2. DHCP IP
 3. TCP SERVER / CLIENT、UDP
 4. DNS
 5. MAC
 6. LAN
 - 7.
 8. RS485
- 9、24V100mA、24V



WG to TCP Converter diagram

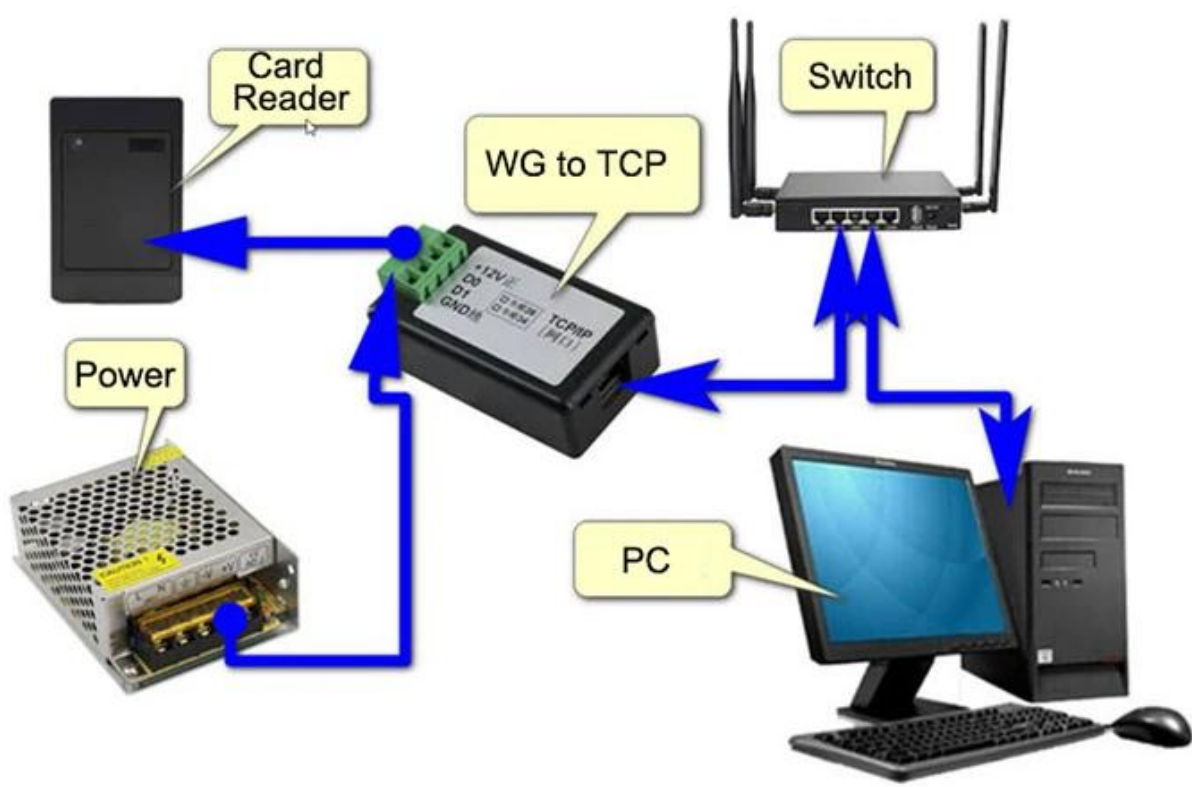

□□□□□□

- 1 24
- 2
- 3 OEM / ODM
- 4
- 5
- 1
- 2
- 3 2 3
- 6 1 5 7 30
- 7 T / T
- 8 DHL FEDEX TNT UPS EMS SEA AIR

□□□□

- ACM Goldbridge 2
- ACM Goldbridge
-

□□

ACM Goldbridge

RFID 1 20 RFID RFID RFID RFID UHF



□□□□□□

3 !!!
20 rfid

