


□


□  
1  
4  
9

|                          |                                     |   |   |                                     |   |   |   |   |   |   |   |   |   |   |
|--------------------------|-------------------------------------|---|---|-------------------------------------|---|---|---|---|---|---|---|---|---|---|
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 3 | 9 | <input checked="" type="checkbox"/> | 3 | 4 | m | m | 1 | 1 | 1 | 5 | 8 | 9 |
|--------------------------|-------------------------------------|---|---|-------------------------------------|---|---|---|---|---|---|---|---|---|---|

[illegible]

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

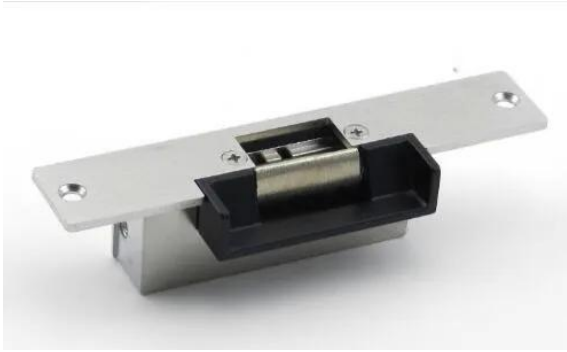

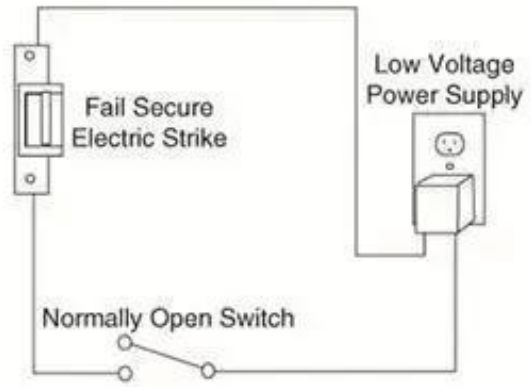

□□□□□□□□□□□□□□□□□□□□NC / NO□□□□□□□□□□

### 03 Low temperature design

less heat is safe and reliable.
















### 04 Low Power Design

Rated Operating Voltage: DC 12V  
Current: 240mA(Fail-secure) /  
120mA(Fail-safe)

### 05 High-quality Aluminum Case

Made of high-quality aluminum for high hardness,  
corrosion resistance & anti-deformation.



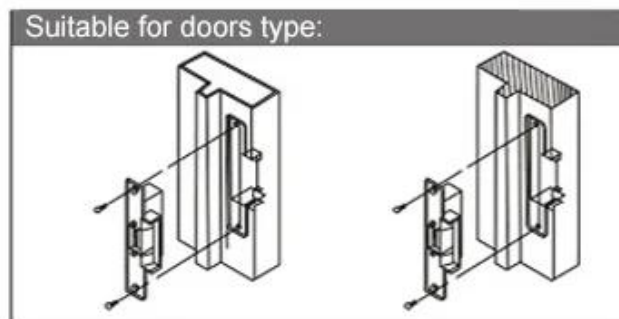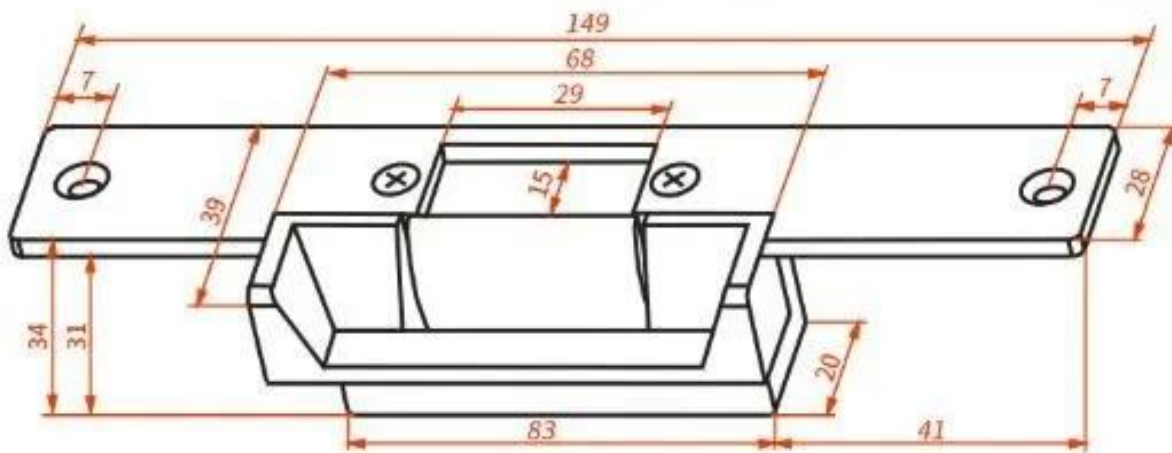

1111

☐ DHL ☐ FEDERAL EXPRESS ☐ TNT ☐ UPS ☐ EMS

11

[illegible]



You may need







NC / NO

NC / NO

280kg 600lbs





280kg / 600lbs

NO / NCPower

130x98x41mm

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|

1. 24  
2.  
3. OEM / ODM  
4. fashin desing &  
5.  
1.  
2.  
3. 2 - 3  
6. 15730  
7. T / T  
8. DHL FEDERAL EXPRESS TNT UPS EMS



**Q1. 請提供產品名稱**

A E 產品名稱

**Q2. 請提供產品型號**

A T / T Paypal 產品型號  
產品型號 DHL Federal Express TNT UPS 產品型號

**Q3. 請提供產品規格**

A 產品規格

**Q4. 請提供產品數量**

A 產品數量 5000pcs 3-7 100,000pcs 7-15

**Q5. 請提供產品包裝**

A 產品包裝 OEM 產品包裝

**Q6. 請提供產品規格**

20 產品規格 RFID / NFC / RFID keybod / RFID rfid 產品規格 1