



12V / 24VDC LED 560KG / 1200LBS

600LBS 12 24 VDC

5
6
L
X
8
1
6
W
X
4
6
H

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100


XXXXXXXXXX

- *XXXXXXXXXX280KGX2,600PoundSX2
- *XXXXXXXX12XXXX24 VDCXXXXXXXX
- *XXXXXXXXXXXX12VDCXXXX
- * MOVXXXXXXXXXXXX
- *XXXXXXXXXXXX
- *XXXXXXXXXXXXXXXXXXXXXXXXXXXX
- *XXXXXXXXXXXX
- *XXXXXXXXXXXXXXXXXXXX
- XXXXXXXXCEXXXXXXXXXXXXMAXXXX

XXXXXXXXOEM / ODMXXXXXXXX



1. 此LED燈帶為ACM-Y280D型號，其PCB板上有12V及24V兩種電壓選擇，且其PCB板上印有LED燈帶的型號及規格。

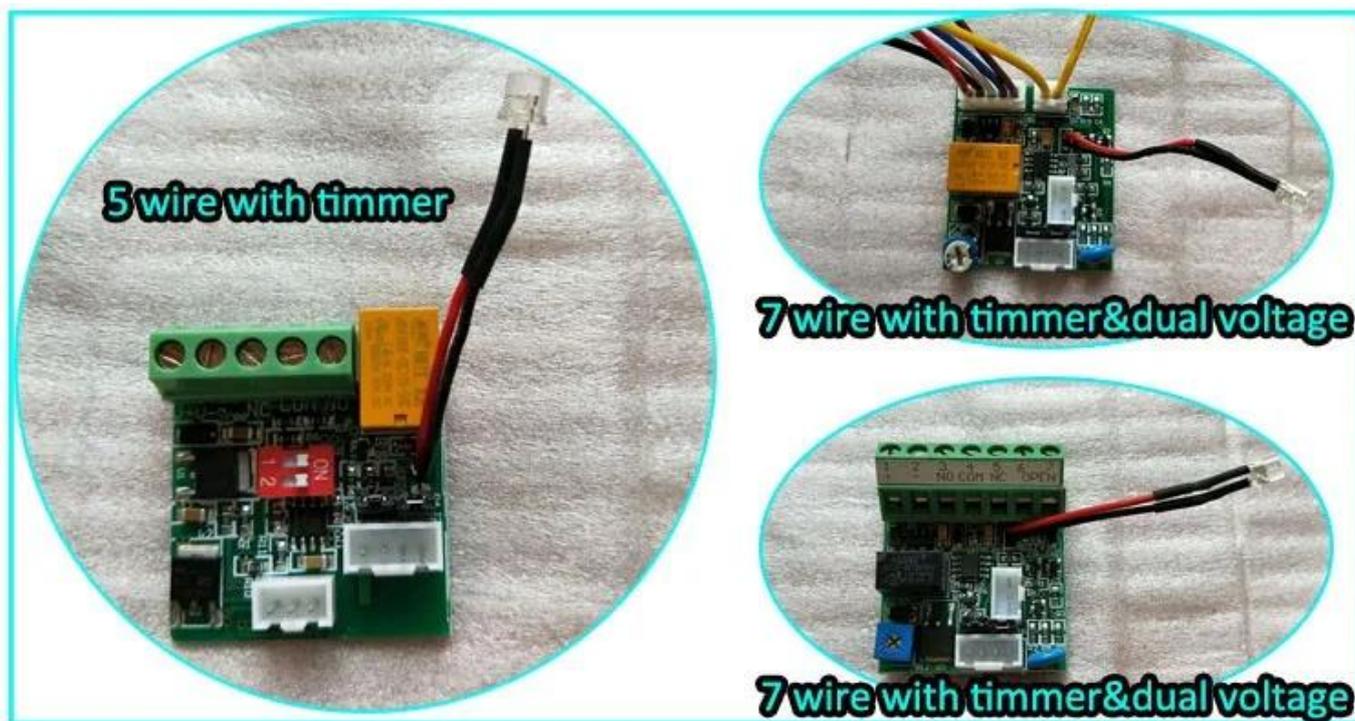


- ACM Goldbridge 2
- ACM Goldbridge
-


□□□□□□□□□□

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured

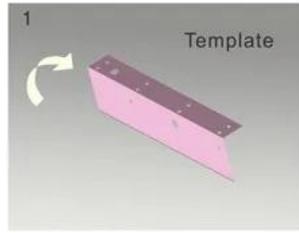

1 Fold the plate to 90° .

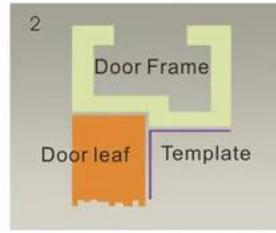


2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.

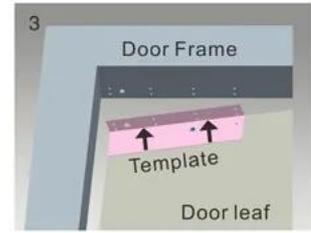


3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.

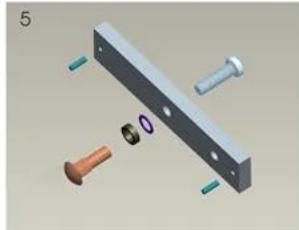


5 Make a combination based on the picture.

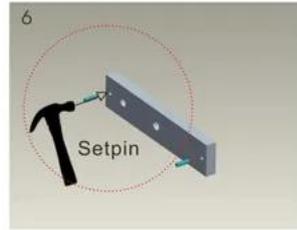

6 Strike the pin into the armature plate slightly (to avoid movement).

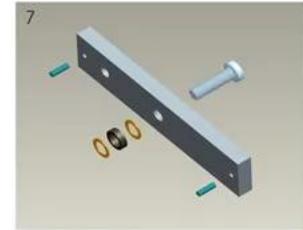


7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.

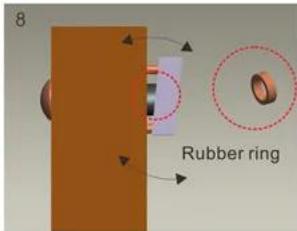


8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.

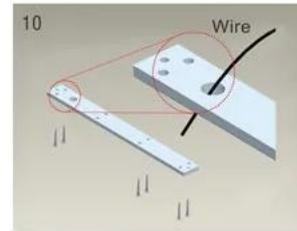


10 Fix the mounting plate on the door frame according to the holes drilled earlier.

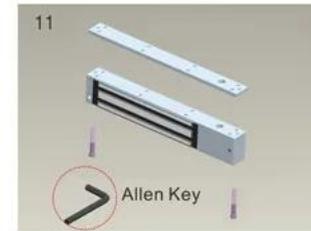


11 Use Allen key to screw the lock body on the mounting plate.

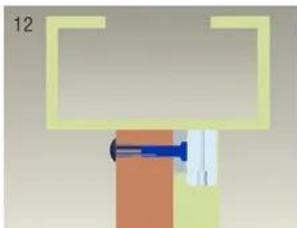


12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.

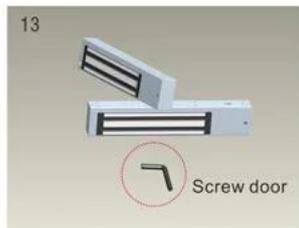


13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.

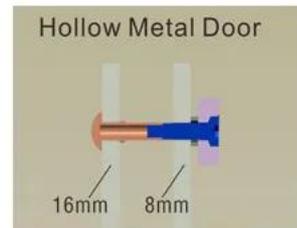

Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm

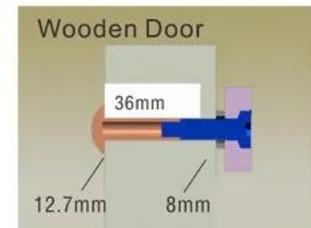

Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm

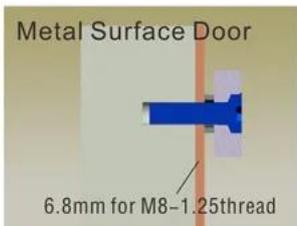

Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

- 1 24小時服務熱線
- 2 專業技術支持
- 3 OEM / ODM服務
- 4 專業Fashion Design / Reayable
- 5 專業生產
- 1 專業技術支持
- 2 專業技術支持
- 3 專業技術支持 2~3
- 6 專業技術支持 1~5 專業技術支持 7~30
- 7 專業技術支持 T / T 專業技術支持 PayPal
- 8 專業技術支持 DHL / FedEx / TNT / UPS / EMS / EMS / EMS / Forwarder



Q1

A 專業技術支持 Production ASAP

Q2

A 專業技術支持 T / T PayPal / Western Union
 專業技術支持 DHL / FedEx / TNT UPS

Q3

A 專業技術支持

Q4

A 專業技術支持 5000pcs / 100,000 專業技術支持 7~15 專業技術支持 3~7

Q5

A 專業技術支持 OEM

Q6

專業技術支持 20 專業技術支持 RFID / NFC / RFID Keybod / RFID 專業技術支持 RFID