




350KG 800LBS x2
0,3,6,9 LED


[illegible]

1 9 L 8 4 5 W 1 1 H 3 5 k g 2 1 2 1 2 V / 8 m A * 2 1 2 4 m A * 2

$\frac{A^3}{3} - \frac{A^6}{6} + \frac{A^9}{9}$





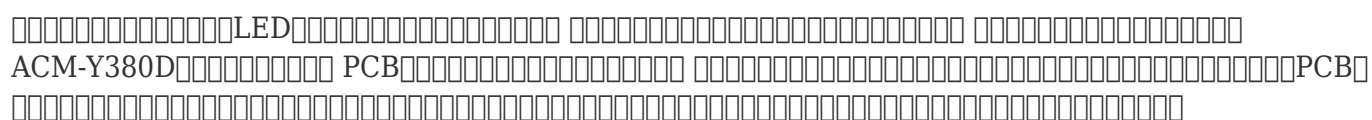


- 2019 ACM Goldbridge 2019 ACM Goldbridge 2019 ACM Goldbridge
- 2019 ACM Goldbridge 2019 ACM Goldbridge 2019 ACM Goldbridge
- 2019 ACM Goldbridge 2019 ACM Goldbridge 2019 ACM Goldbridge


2019 ACM Goldbridge 2019 ACM Goldbridge 2019 ACM Goldbridge

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□

□□□□

□□□□□□□□□□□□□□□□DHL□FEDERAL EXPRESS□TNT□UPS□EMS□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□

□□

□□□□□□□□1□□□□1□□□□□□□□□□5□□

□□□□□□□□□35 * 30 * 16 cm□□□□□□25 kg



You may need



ACM-Y280N

□□□□□□□□□□280kgs / 600lbs□□□□□□
□□□□□□□□□□□□□□□□□□□□□□

ACM-Y180

□□□□□□180kg / 300lbs□□□□□□2□□□□□□
□□□□□□□□□□□□□□□□□□□□□□

ACM-Y280

280kg / 600lbs 鋼製 280kg / 600lbs 鋼製 280kg / 600lbs 鋼製



ACM-Y280-L

280kg / 350kg 鋼製 280kg / 350kg 鋼製 280kg / 350kg 鋼製

ACM-Y180ZL

180kg / 300lbs 鋼製 180kg / 300lbs 鋼製 180kg / 300lbs 鋼製

ACM-Y280-ZL

280Kg / 350Kg 280Kg ZL 350Kg

280Kg ZL 350Kg

1. 24 24
2. 280Kg / 350Kg 280Kg ZL 350Kg
3. OEM / ODM
4. fashin desing & 280Kg ZL 350Kg
5. 280Kg ZL 350Kg
1. 280Kg ZL 350Kg
2. 280Kg ZL 350Kg
3. 280Kg ZL 350Kg 2 - 3
6. 280Kg ZL 350Kg 1 5 7 30
7. T / T 280Kg ZL 350Kg
8. DHL / FEDERAL EXPRESS / TNT / UPS / EMS 280Kg ZL 350Kg

280Kg ZL 350Kg

Q1. 280Kg ZL 350Kg

A. E 280Kg ZL 350Kg

Q2. 280Kg ZL 350Kg

A. TT / T Paypal 280Kg ZL 350Kg
DHL / Federal Express / TNT UPS 280Kg ZL 350Kg

Q3. 280Kg ZL 350Kg

A. 280Kg ZL 350Kg

Q4. 280Kg ZL 350Kg

A. 280Kg ZL 350Kg 5000pcs 3-7 100,000pcs 7-15

Q5. 280Kg ZL 350Kg

A. 280Kg ZL 350Kg OEM 280Kg ZL 350Kg

Q6. 280Kg ZL 350Kg

20 280Kg ZL 350Kg / NFC / RFID / keybod / RFID rfid 280Kg ZL 350Kg 1