




□□□□□□□□ **500kg / 1000lbs** □□□□□□□□

□□□□□□□□ 1000□□□□ 500 kg □□□□□□□□□□□□




1 9 L x 1 9 4 5 W 1 1 H 5 k 9 2 7 2 4 V D C

ONLINE COMMUNICATIONS







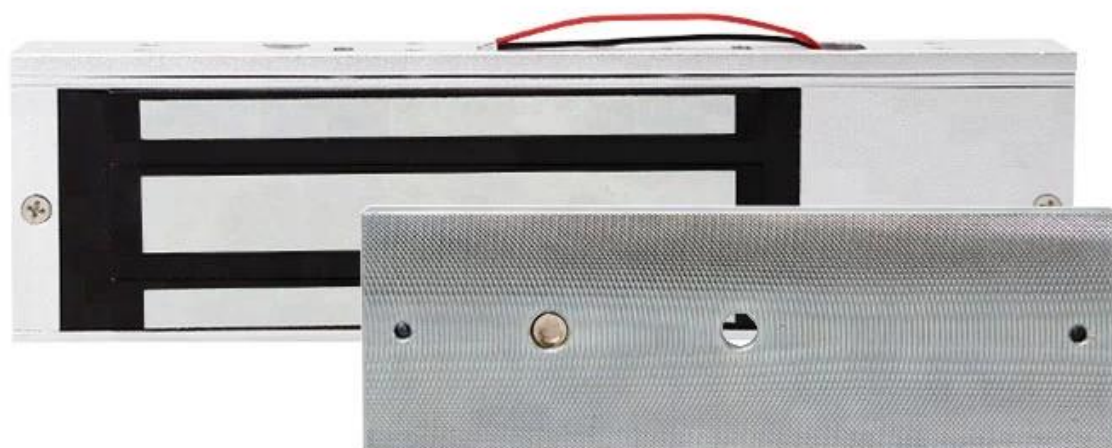

## คุณสมบัติ

- 500kg / 1000lbs
- 12VDC / 24VDC
- 12VDC
- MOV
- 
- LED
- NO / NC / COM
- NO / NC / COM
- 
- 
-


- 1000mm x 100mm x 25mm
- 1000mm x 100mm x 25mm CE 1000mm x 100mm x 25mm MA

1000mm x 100mm x 25mm OEM / ODM 1000mm x 100mm x 25mm



1000mm x 100mm x 25mm LED 1000mm x 100mm x 25mm 1000mm x 100mm x 25mm  
 ACM-Y500 1000mm x 100mm x 25mm PCB 1000mm x 100mm x 25mm 12v 24v 7 1000mm x 100mm x 25mm PCB  
 1000mm x 100mm x 25mm 1000mm x 100mm x 25mm 1000mm x 100mm x 25mm 1000mm x 100mm x 25mm



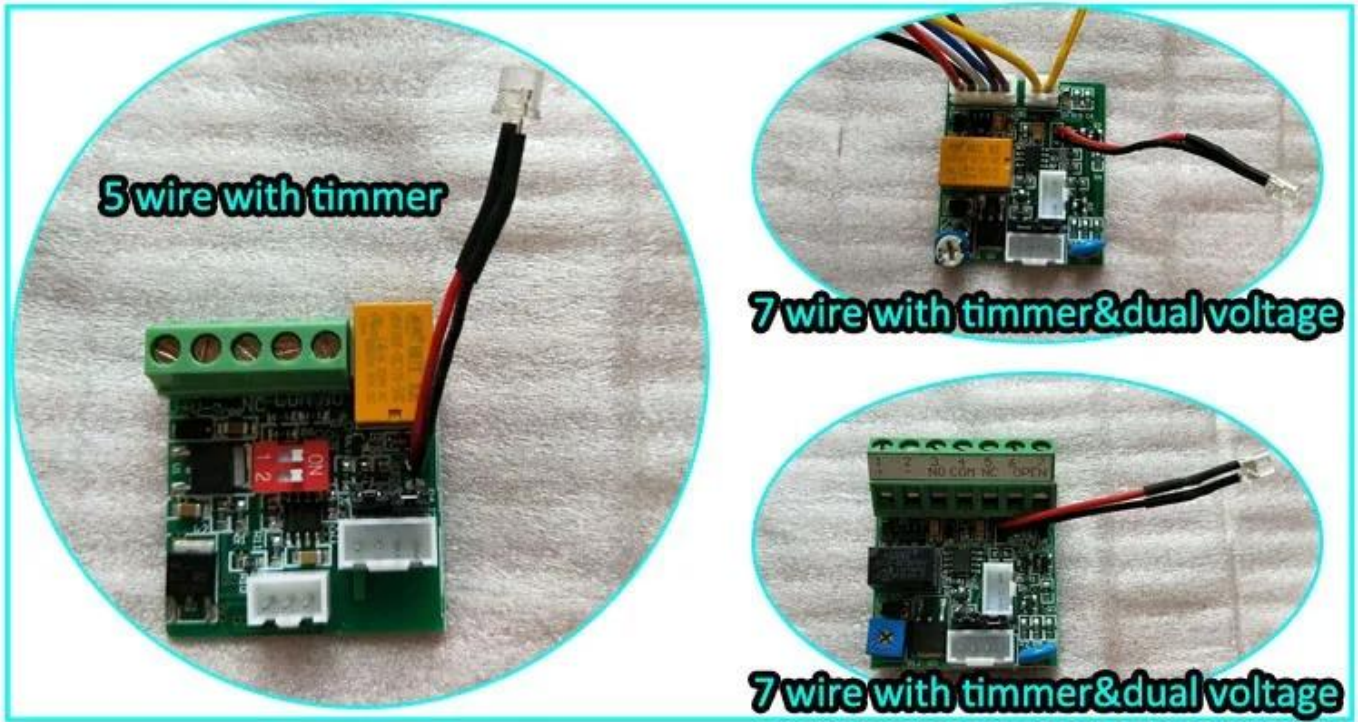


## 

- 5-wire configuration with timer
- 7-wire configuration with timer and dual voltage
- 7-wire configuration with timer and dual voltage


##

# STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door  
Drill a hole  
Inside: Diameter is 8mm  
Outside: Diameter is 16mm



Wooden Door  
Drill a hole  
Inside: Diameter is 8mm  
Outside: Diameter is 12.7mm



Metal Surface Door  
6.8mm for M8-1.25thread  
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

## Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□ □ □ □

DHL FEDEX TNT UPS EMS 日本郵便 by SEA 日本郵船 By AIR 日本航空  
 日本郵船 日本航空

[illegible]

□□□□□□□□□□□□□□□□1□□□□□□□□□□□□□□□□6□□



## 我們提供

1. 24小時緊急支援
2. 專業技術團隊為您提供諮詢及支援服務
3. OEM / ODM 服務
4. 專業技術團隊為您提供諮詢及支援服務
5. 專業技術團隊為您提供諮詢及支援服務
1. 專業技術團隊為您提供諮詢及支援服務
2. 專業技術團隊為您提供諮詢及支援服務
3. 專業技術團隊為您提供諮詢及支援服務
6. 專業技術團隊為您提供諮詢及支援服務
7. 專業技術團隊為您提供諮詢及支援服務
8. DHL, FEDEX, TNT, UPS, EMS, SEA, AIR 等國際物流服務

## 常見問題

### Q1 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務

### Q2 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務

### Q3 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務

### Q4 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務

### Q5 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務

### Q6 專業技術團隊為您提供諮詢及支援服務

A. 專業技術團隊為您提供諮詢及支援服務