







Specifications:

Card type: EM

Working voltage: DC12V $\pm$ 10%

Reading Range: 3-6cm

Humidity: 10% to 90% RH

Door Opening Time: 0-99s (Adjustable)


Static electricity: $\leq$ 30mA

Ambient temperature: -45 °C ~ 60 °C

Electric lock output: $\leq$ 1A

Short-circuit Protect: $\leq$ 100 μ S



Dimensions: 114*75*16mm

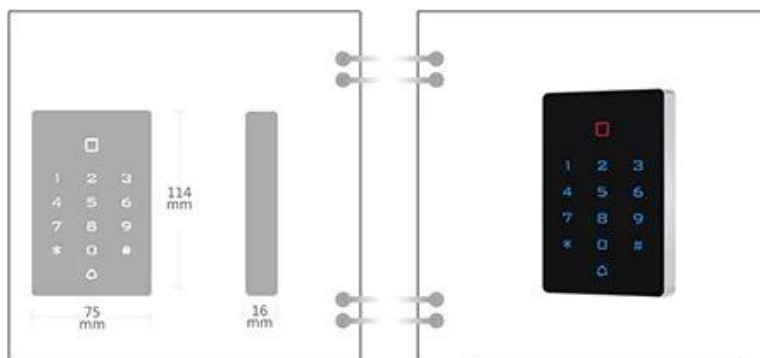

Product Feature

- ◆ Digital backlit touch keypad
- ◆ Multi-function standalone access controller and reader,
- ◆ WG interface: WG26 Input / output
- ◆ Capacity: 2000 cards / codes
- ◆ Three accesses: card, pin, card + pin

• • • • • PRODUCT DETAILS • • • • •

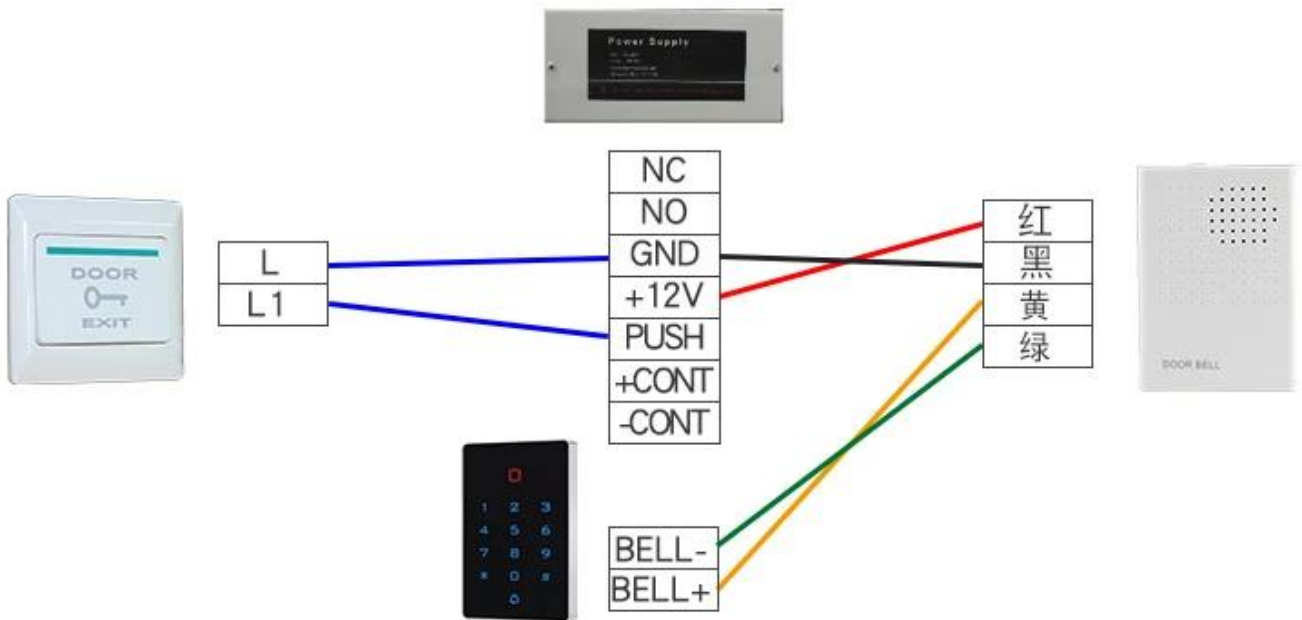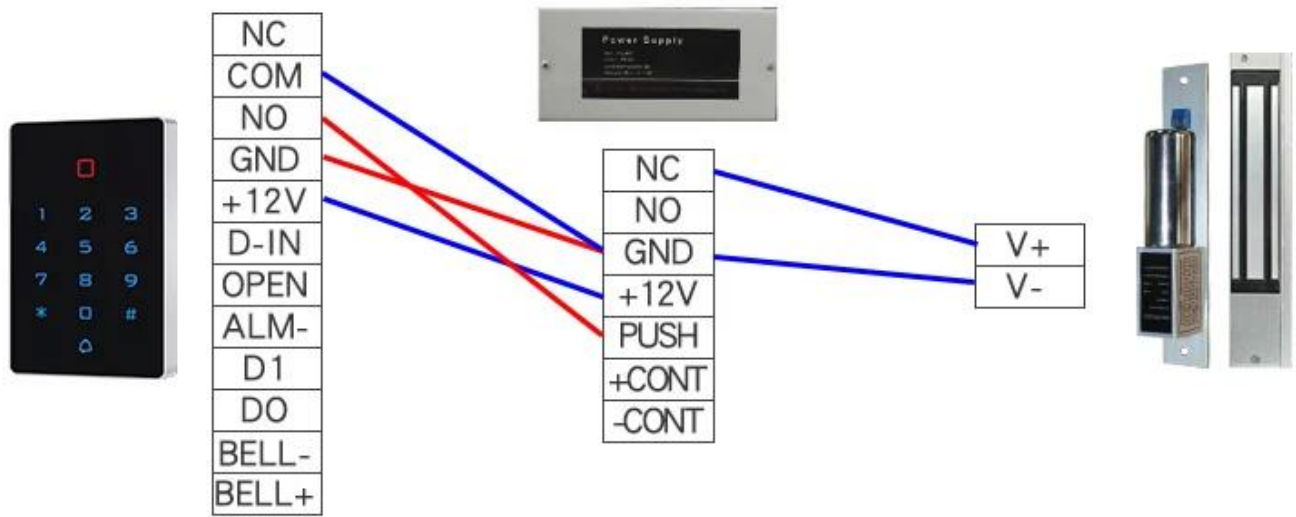



4 doors system diagram



□□	□□□□□□□□
□□□	125KHZ
□□□	110 * 71 * 15mm
□□□□	DC 12V
□□□	30MA

1. 2. 3. 4. 5. 6. 7. 8.

1. 24 小時服務熱線
2. 提供 24 小時緊急維修服務
3. OEM / ODM 服務
4. 提供 24 小時緊急維修服務
5. 提供 24 小時緊急維修服務
1. 提供 24 小時緊急維修服務
2. 提供 24 小時緊急維修服務
3. 提供 24 小時緊急維修服務
6. 提供 24 小時緊急維修服務
7. 提供 24 小時緊急維修服務
8. DHL, FEDEX, TNT, UPS, EMS 等國際快遞公司

1. 2. 3. 4. 5. 6. 7. 8.

ACM 集團成員 Goldbridge

RFID 技術應用 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.

