

11

[illegible]

-2□ISO-18000B□EPC□□□□□□□□□□

-3□Reading Rang□Max□:: 10-20M


-4 SDK

[illegible]

[illegible]

[illegible]

EPCC class 1 Gen2
2
1
S
6
B



--	--	--	--	--

- [illegible]




Standard interface



RS232.485, Wiegand26


Optional interface

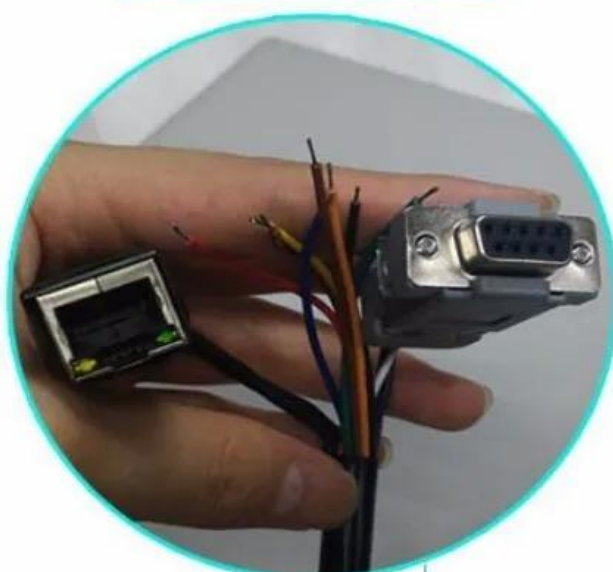

Ethernet , TCP/IP



RFID UHF

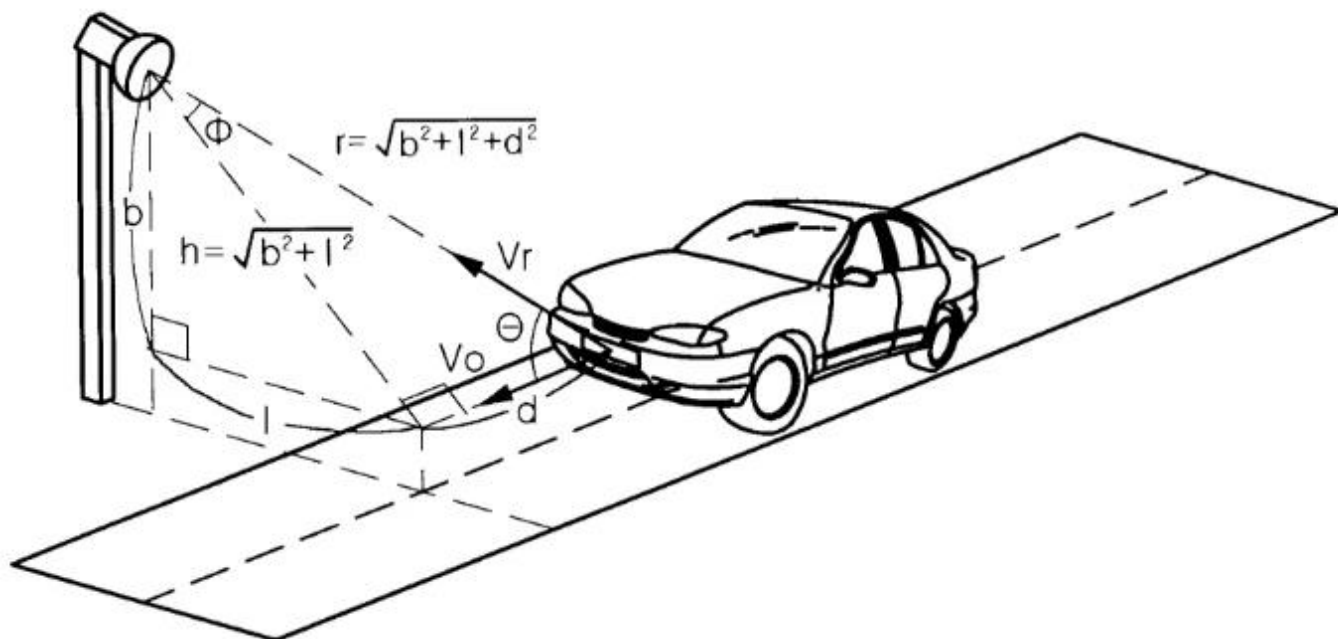

□□□□□

□□
 UHF□□□□□□□□□□1unit□□□□□□□□10pcs□
 □□□□□□□□32×32×6cm□□□□□□5kg□

5

uhf ACM812A ACM802A ACM818A ACM801A
ACM801A 200





ACM812A

25mm x 100mm x 100mm UHF 100mm
 26mm RS232 / 485

ACM818A

10-20mm x 100mm x 100mm UHF 100mm
 26mm RS232 / 485

ACM802A

8-10mm x 100mm x 100mm UHF 100mm
 26mm RS232 / 485





ACM801A
10-15m UHF
2600RS232 / 485

ACM 8017
UHF
UHF + WIFI + GRPS

ACM 918K
UHF 4

1. 24
- 2.
3. OEM / ODM
4. & A
- 5.
- 1.
- 2.
3. 2 3
6. 1 5 7 30
7. T / T

Q&A

Q1.

A. E

Q2.

A. T / T Paypal

DHL Federal Express TNT UPS

Q3.

A.

Q4.

A. 5000pcs 3-7 100,000pcs 7-15

Q5.

A. OEM

Q6.

20 RFID / NFC / RFID keybod / RFID rfid 1