

$\mathbb{Z}$ 3 A

8
6
8
6
6
8
2
7
m
m
A
C
D
D
V
-
2
4
V
D
D
D
D
6
W
D
D
D
C
C
D
2
V
;
D
D
/D
N
C
D
D
6
S

□□□□

Dimensions(mm)



► L85 x W65 x D27mm

Size: L88 x W71 x D29mm ◀

Weight: 0.14kg ◀



Access Control Switch Power Supply

The power supply is applied to access control devices and building intercom device and also for video access control.




Metal shell

Safety | Anti-fall | Fire prevention



Delay adjustment


Built-in time delay circuit that can set unlock time, set exit button input that can control unlock electric lock.



Smart circuit board

Using high-quality circuit boards



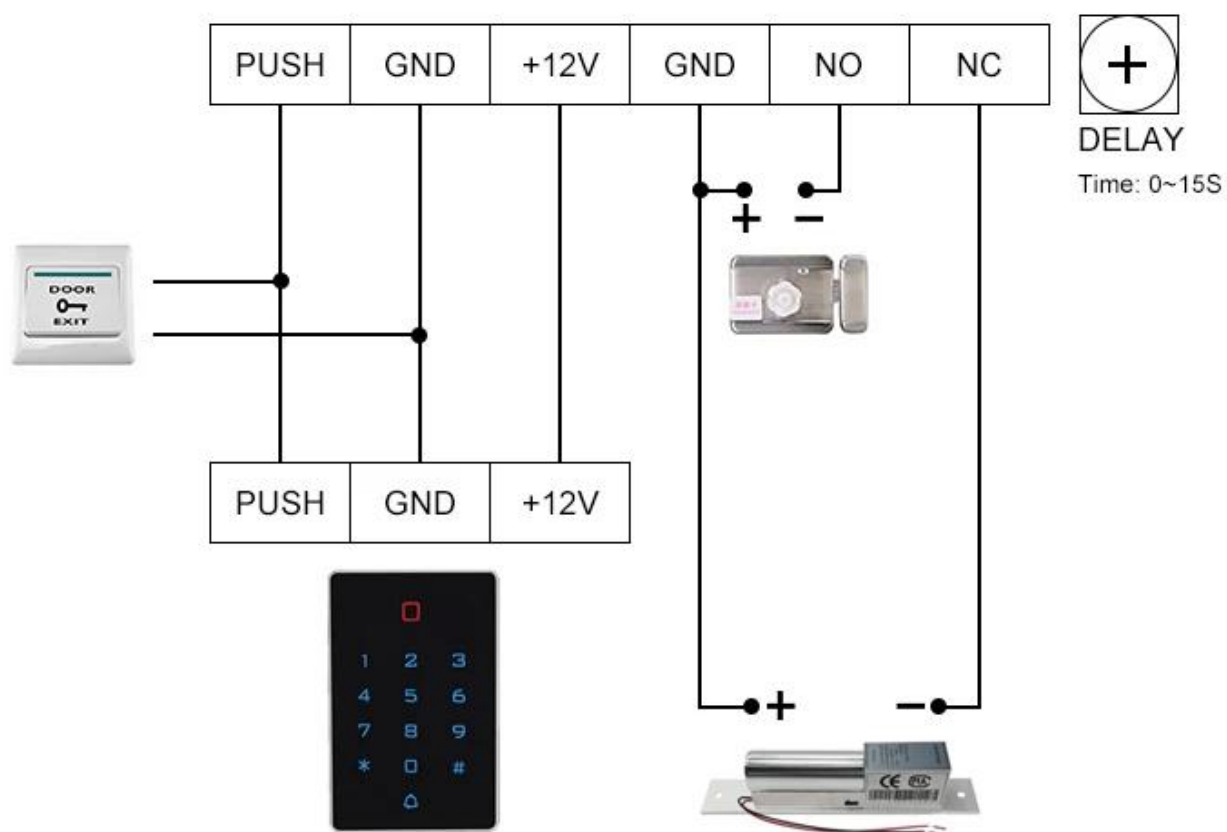

Scope of Application



Company



Hospital



Hotels



Logistics



Port



Financial



Government



Factory



Aviation



School



ups

DHL
WORLDWIDE EXPRESS®

aramex
delivery unlimited

EXW

FCA FOB

CIF CFR

2000RFID1
 Expectation
 Air / Sea Line COFTA
 F...e ... ECT
 EXWFOBFCIFCFR ...
 ...
 ...



1000000000



ACM-Y280

□□□□□□□□280kg / 600□□□□



ACM-Y806-5A.

□□□□□□□□□5A



ACM225

Touch Keypad RFID□□□□□12kHz



ACM-210

RFID wiegand



ACM26X

125KHz EM RFID

115mm×75.5mm×16.8mm



ACM Shenzhen Goldbridge

RFID 20 RFID RFID Keyfob RFID RFID RFID

