

2D QR 1D QR

Silicon LABS

00000000:

00	ABS
000	00*0*00: 170*88*70mm
00	DC5V/300mA
0000	135±10g
000000000000	USB0RS-232
000000	
0000	00CMOS0000
00	00LED000
000000	32000MCU
000000	UPC-A0UPC-E/E10EAN-130EAN-80ISBN/ISSN000039
	0000 39 (ASCII 000000)032 00000000000000 39 0000000025 0000
	000000000025 0000(Discrete20f5)000000000025 00000000
	00(NW7)0128 0000UCC/EAN1280ISBT128093 00001100
	0(USD-8)0MSI/000000000000/000000
000000	3500000/0
00000000	000000000000000000
000000	100650mm
00000000	00000000(LED)
0000000000	35%
000000	00000°360°0000±65°0000±60°
0000	0 0 50 °C / 32 0 122 °F
0000	0 0 50 °C / 32 0 122 °F
0000	5 0 95% (00000000)
0000	00000000001.5m000000

PLUG AND PLAY MATCH VARIOUS SYSTEMS

Connect to the usb port of laptop or desktop



Mac OS



Linux



Android



Windows



Stronger Decode Ability

Can read most of 1D QR 2D code, included damage code.



Automatically Standby & Wake Up

Intelligent infrared sensor,barcode decode more convenience.



Support Screen Scanning

You can scan most barcode from digit screen



Plug and Play

No driver & software needed




- ✓ Win7/8/10/XP
- ✓ Mac OS
- ✓ Linux

A5 Wired 2D Desktop Barcode Scanner



How to Use This Barcode Scanner?

1. For better scanning function, please hold this scanner at right angle, don't decode it at 90°.

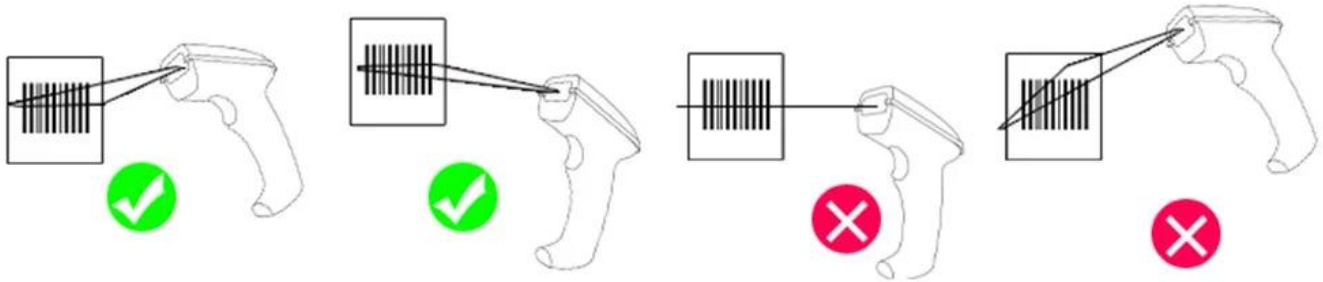

2. For truly decoding the barcode, scanning laser must cover the whole barcode.



How to Assemble/Disassemble the Cable?

Plug sharp things like toothpick or clip into the right hole and then pull out the cable easily.





Shakeproof



Super decoding



Compatible
different terminal



High Cost-Effective

WE PROVIDE THE MOST COMPLETE
PROFESSIONAL SCANNING APPLICATION



Logistics express
barcode



Supermarket
barcode



Medical
barcode



Factory
inventory



Machine
customization





Shipping







ACM26X RFID 非接触式读卡器

125Khz 非接触式 26 /34 非接触式读卡器
尺寸 115mm×75.5mm×16.8mm

ACM26G RFID 非接触式读卡器

125Khz /13.56Mhz 非接触式读卡器
尺寸 26/34 /RS232

KR600E RFID 非接触式读卡器

125KHz 非接触式 ID/13.56Mhz 非接触式读卡器
尺寸 26 非接触式





ACM-EMI-S RFID

125Khz EM

86×54mm

ACM-MF1 RFID

MF1 1K

ACM-ABS003 RFID

125Khz EM/13.56Mhz/UHF

:



- ACM Goldbridge 2
- ACM Goldbridge

