

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □

[illegible][illegible]

g **k** **g**

D
C
1
2
V
□□
V□
□
□
□□
□
m
A
□
;
2
m
A
□
F
A
I
L
S
E
C
U
R
E
□
;
□□
□
□□
□
□
□□
□
□
□

A vertical number line with tick marks for every integer from -10 to 10. The numbers are written to the left of the line. The origin (0) is marked with a circle. The units are labeled 'P' for positive and 'V' for negative. The temperature scale is indicated by '°C' at both ends.

Temperature (°C)	Label
-10	-10
-9	-9
-8	-8
-7	-7
-6	-6
-5	-5
-4	-4
-3	-3
-2	-2
-1	-1
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10


ACM-Y132

ACM-Y132 係採用高品質之鋁合金製成，其外觀美觀大方，且具有良好的防盜功能。該產品適用於各種門窗，安裝簡便，使用壽命長。其內部構造採用高強度之鋼材，能有效防止非法入侵。此外，該產品還具有優良的防火性能，能為您的財產安全提供額外的保障。其外觀設計簡潔大方，與各種裝修風格相得益彰。該產品還具有優良的防盜功能，能有效防止非法入侵。此外，該產品還具有優良的防火性能，能為您的財產安全提供額外的保障。

歡迎各界人士垂詢，我們將竭誠為您服務。



ACM-Y131 NO / NC 係採用高品質之鋁合金製成，其外觀美觀大方，且具有良好的防盜功能。該產品適用於各種門窗，安裝簡便，使用壽命長。其內部構造採用高強度之鋼材，能有效防止非法入侵。此外，該產品還具有優良的防火性能，能為您的財產安全提供額外的保障。其外觀設計簡潔大方，與各種裝修風格相得益彰。該產品還具有優良的防盜功能，能有效防止非法入侵。此外，該產品還具有優良的防火性能，能為您的財產安全提供額外的保障。

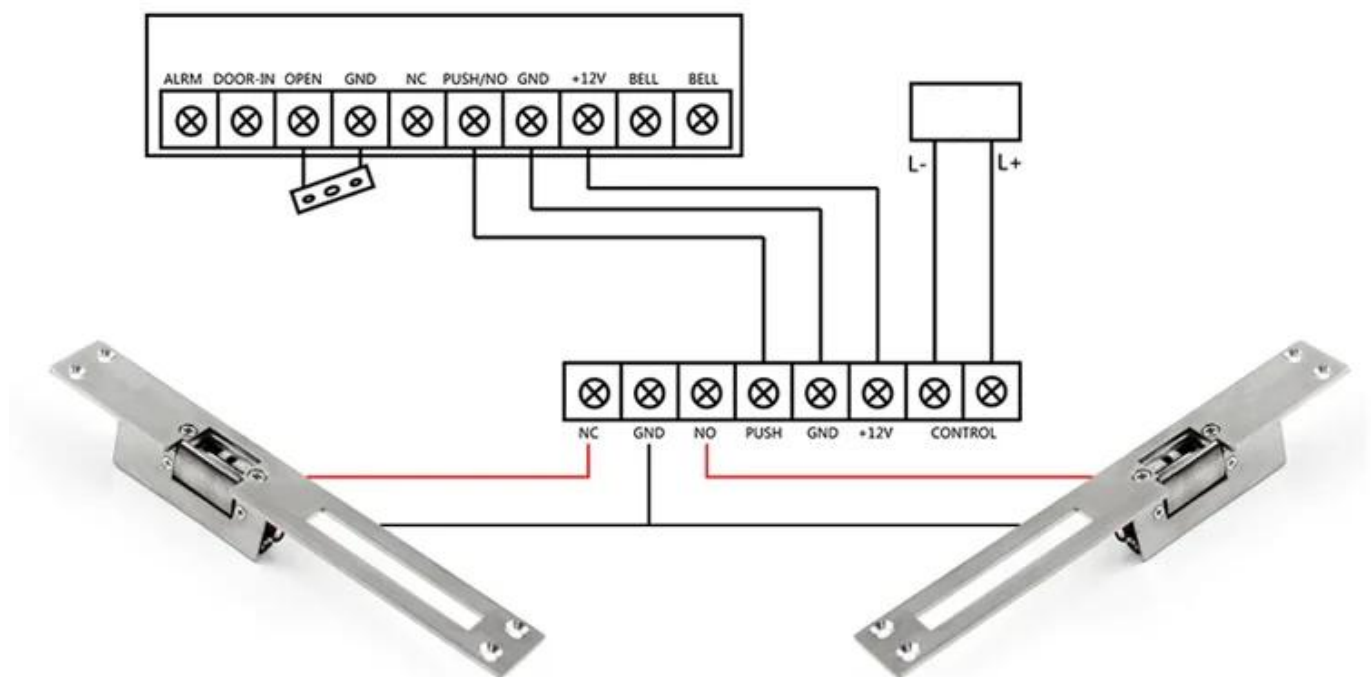

NC / NO

03 Low temperature design

less heat is safe and reliable.



04 Low Power Design

Rated Operating Voltage: DC 12V
Current: 240mA(Fail-secure) /
120mA(Fail-safe)


05 High-quality Aluminum Case

Made of high-quality aluminum for high hardness,
corrosion resistance & anti-deformation.




- 模块采用高品质铝壳，具有良好的硬度、耐腐蚀性和抗变形能力。
- 模块采用ACM Goldbridge™ 2.0™ 技术，具有低功耗、高可靠性、高安全性等特点。
- 模块采用ACM Goldbridge™ 2.0™ 技术，具有低功耗、高可靠性、高安全性等特点。







Cutting according to the size of the electric lock




Insert extension plate




Fix extension plate




After installed, power on and test it



Fix strike lock



Finish

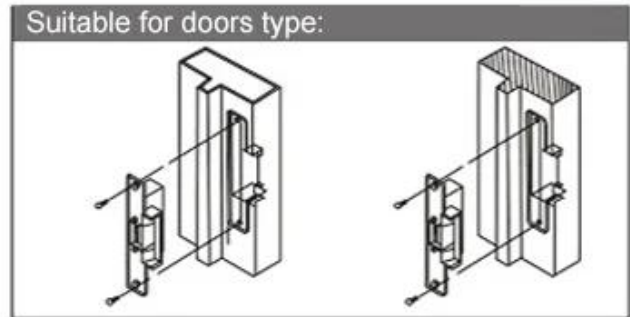

Metal door frame

Wooden door frame



1111

☐ DHL ☐ TNT ☐ UPS ☐ EMS ☐ EMS-Forwarder ☐

□ □

11

1 unit 30

54.5 * 20 * 30.5CM 11.7kg 50



□□□□□□□□□□□□□□3□□□□□□□□□□□□□□□□

2019年12月31日



ACM-Y130

□□□□□□□□PVC□□□□□□□□□□□□NC /
NO□

**ACM-Y131**

☐ PVC ☐

☐ NC / NO ☐

**ACM-Y132**

280kg 600

You may need

□□□□□□□□□□□□□□3□□□□□□□□□□□□□□□□

20



ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-Y100S

□□□□□□□□□□

□□□□□□NO / NCPOWEROCK□□□□□□□□□□



ACM-Y066

□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□130x98x41mmworking

[□□□□□□□□□□□□□□□□□□□□□□□□](#)



ACM-WEG02

2-Port RS232 / RS485 / TCP / IP



ACM-K2A.

No Touch Door Release Exit Button K2A
115 * 40mm; K2B 86 * 86mm



ACM-Y806-3A.

12V / 3A



ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-26X

125kHz Wiegand 26/34□□□□□□□□

□□115mm×75.5mm×16.8mm



ACM-EMI-S

125kHz em□□□□□□