



350kgs

800lbs 350kg

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

[illegible]

$\frac{1}{\sqrt{N}} \sum_{j=1}^N \left(\frac{\partial}{\partial \theta_j} \log p(\mathbf{x}) \right)$




□ □ □ □ □

- 重量 350kg
- 入力電圧 12VDC
- 出力電圧 12VDC
- MOV
- LED
- NO / NC / COM
- NO / NC / COM
-
-
-

- OEM / ODM□□□□□



ACM-Y350 LED PCB 12v&24v 7

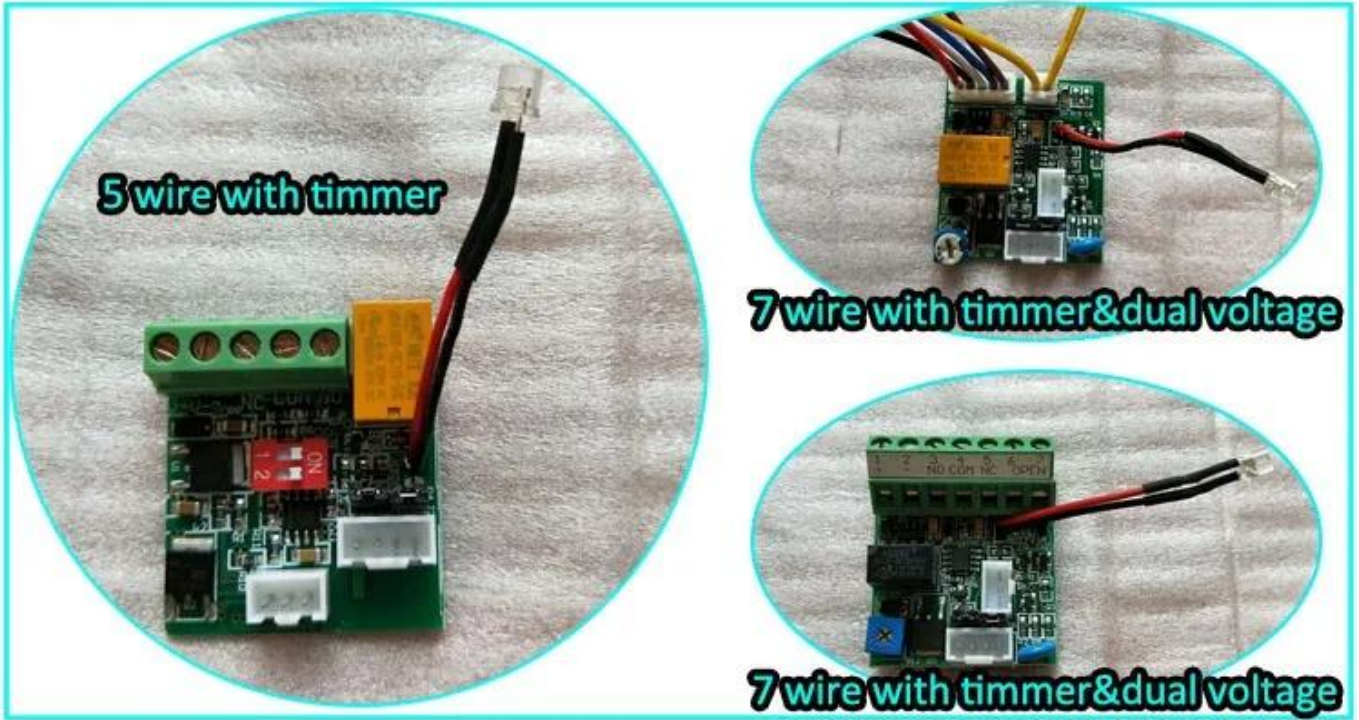

- 5-wire configuration with timer
- 7-wire configuration with timer and dual voltage
- 7-wire configuration with timer and dual voltage

##

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

包裝

我們

DHL、FEDEX、TNT、UPS、EMS 等服務，可選擇由SEA 或By AIR 運送，並可選擇
不同的包裝方案。

我們

提供多種包裝方案，可選擇1 個或6 個

包裝，尺寸為35 * 30 * 16cm，重量為24kg，數量為50 個。



You may need



ACM-Y280N

280kgs / 600lbs
 280kgs / 600lbs

ACM-Y180

180kg / 300lbs
 180kg / 300lbs

ACM-Y280

280kg / 600lbs
 280kg / 600lbs



ACM-Y280-L

280kg / 350kg

ACM-Y180ZL

180kg / 300lbs

ACM-Y280-ZL

280Kg / 350Kg

24

1

2

3. OEM / ODM 服務

4. 產品設計、開發、生產、銷售、服務

5. 產品包裝設計

1. 產品設計、開發、生產、銷售、服務

2. 產品包裝設計

3. 產品設計、開發、生產、銷售、服務

6. 產品設計、開發、生產、銷售、服務

7. 產品設計、開發、生產、銷售、服務

8. DHL, FEDEX, TNT, UPS, EMS, SEA, AIR 等物流服務

服務項目

Q1. 產品設計、開發、生產、銷售、服務

A. 產品設計、開發、生產、銷售、服務

Q2. 產品包裝設計

A. 產品設計、開發、生產、銷售、服務

產品設計、開發、生產、銷售、服務

Q3. 產品設計、開發、生產、銷售、服務

A. 產品設計、開發、生產、銷售、服務

Q4. 產品設計、開發、生產、銷售、服務

A. 產品設計、開發、生產、銷售、服務

Q5. 產品設計、開發、生產、銷售、服務

A. 產品設計、開發、生產、銷售、服務

Q6. 產品設計、開發、生產、銷售、服務

產品設計、開發、生產、銷售、服務