



5 g □8 X 4 W L 9 X **B**V Ħ

____OEM / ODM____

Mini Single Door Magnetic Lock

Stable Holding Force


magnetic locks have 60kg(100 lbs) linear pulling force.



Aluminum Shell

Shell with high strength alloy material, anode hardening treatment.



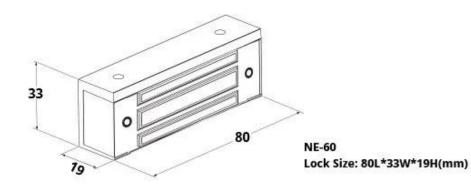

- $\square \square \square \square \square DC12V \square \square DC24 \square \square \square \square \square \square \square$
- -___60kg_120lbs_
- -000000000000
- -00000000
- -00000000

Double Insulation

Lock body with double insulation treatment,



special Used to Small Cabinet Door

Saves time and power when installation.



 $\label{eq:continuity} DHL \cite{Continuity} FEDEX \cite{Continuity} TNT \cite{Continuity} UPS \cite{Continuity} EMS \cite{Continuity} DOUBLE \cite{Continuity} By AIR \cite{Continuity} DOUBLE \ci$

ПП

____35 * 30 * 16cm____25kg







You may need



ACM-Y280N

ACM-Y180

____180kg / 300lbs_2______ _____

ACM-Y280







ACM-Y280-L

280kg / 350kg

ACM-Y180ZL

180kg / 300lbs

ACM-Y280-ZL

280Kg / 350Kg

10000000000024000000000

3[OEM / ODM[][][]

5000000000

70000 000000T / T00000000Paypal00000000

$\mathbf{Q} \square \mathbf{2} \square \square$

0000RFID000/ NFC00/ RFID00000/ RFID000000rfid000000000000000000100001000020000000