

D
C
1
2
V
□□
V□
□
□
□□
□
m
A
□
;
8
m
A
□
F
A
I
L
S
E
C
U
R
E
□
;
□□
□
□□
□
□
□□
□
□
□

A vertical number line with integers from -10 to 10. The line is marked with integers. Above the line, the letters P, V, and C are placed above the numbers 1, 2, and 3 respectively. Below the line, the letters H, F, and G are placed below the numbers -1, -2, and -3 respectively. The unit °C is placed to the right of the line at the 0 and 5 marks.


ACM-Y131 2 / PVC

OEM / ODM

12V 24V



ACM-Y131 NO / NC 2

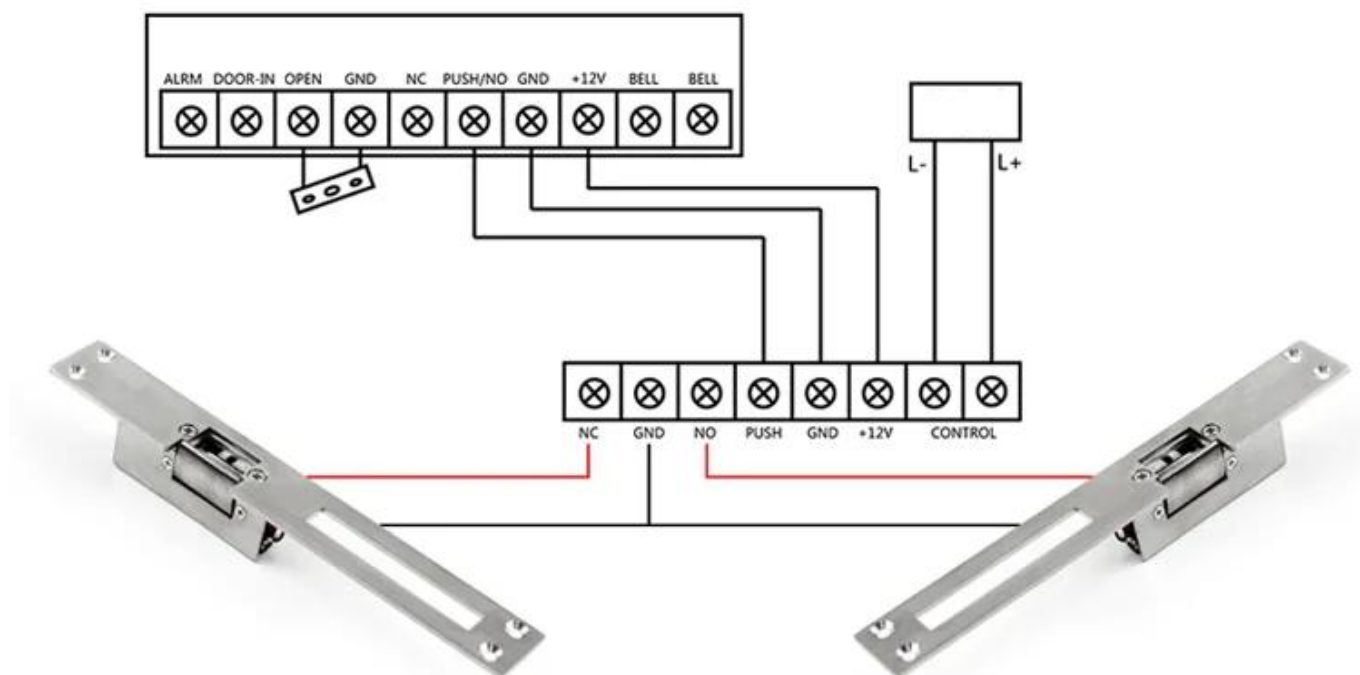

NC / NO

03 Low temperature design

less heat is safe and reliable.



04 Low Power Design

Rated Operating Voltage: DC 12V
Current: 240mA(Fail-secure) /
120mA(Fail-safe)

05 High-quality Aluminum Case

Made of high-quality aluminum for high hardness,
corrosion resistance & anti-deformation.



- 模块采用高品质铝壳，具有高强度、耐腐蚀、抗变形、ACM Goldbridge模块采用240mA(Fail-secure) / 120mA(Fail-safe)
- 模块采用ACM Goldbridge模块，具有高强度、耐腐蚀、抗变形
- 模块采用高品质铝壳，具有高强度、耐腐蚀、抗变形





ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-Y100S

□□□□□□□□□□

□□□□□□NO / NCPOWEROCK□□□□□□□□□□



ACM-Y066

□□□□□□□□□□□□□□□□□□□□

□□□□□□□130x98x41mmworking

[□□□□□□□□□□□□□□□□□□□□](#)



ACM-WEG02

2-Port RS232 / RS485 / TCP / IP



ACM-K2A.

No Touch Door Release Exit Button K2A
115 * 40mm; K2B 86 * 86mm



ACM-Y806-3A.

12V / 3A



ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-26X

125kHz Wiegand 26/34□□□□□□□□

□□115mm×75.5mm×16.8mm



ACM-EMI-S

125kHz em□□□□□□