

□
□
□
□□
8
6
L
X
8
6
W
X
2
H
M
3
□A
3
6
V
D
C
M
A
X
h
c
N
c
o
h
□
□
□
□
□
□
□
□
□
□



Mechanical Life: 1000000 tested



Operating temp: 10~+55°C(14-131°F)

Panel Material: Fireproof Material


Current Rating: 3A,36VDC Max







Control Center

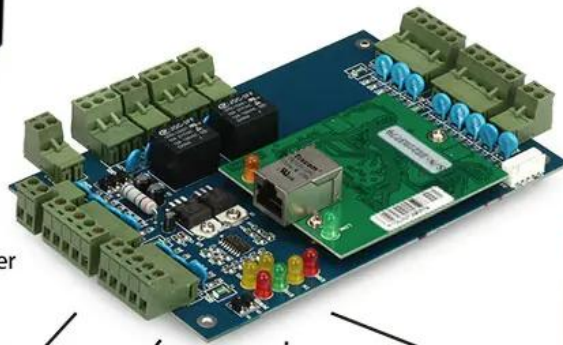

TCP/IP Door Controller



Electric Bolt Lock



Magnetic Locks



Waterproof RFID Reader
Door Access Control




Exit Button



Access Power Supply



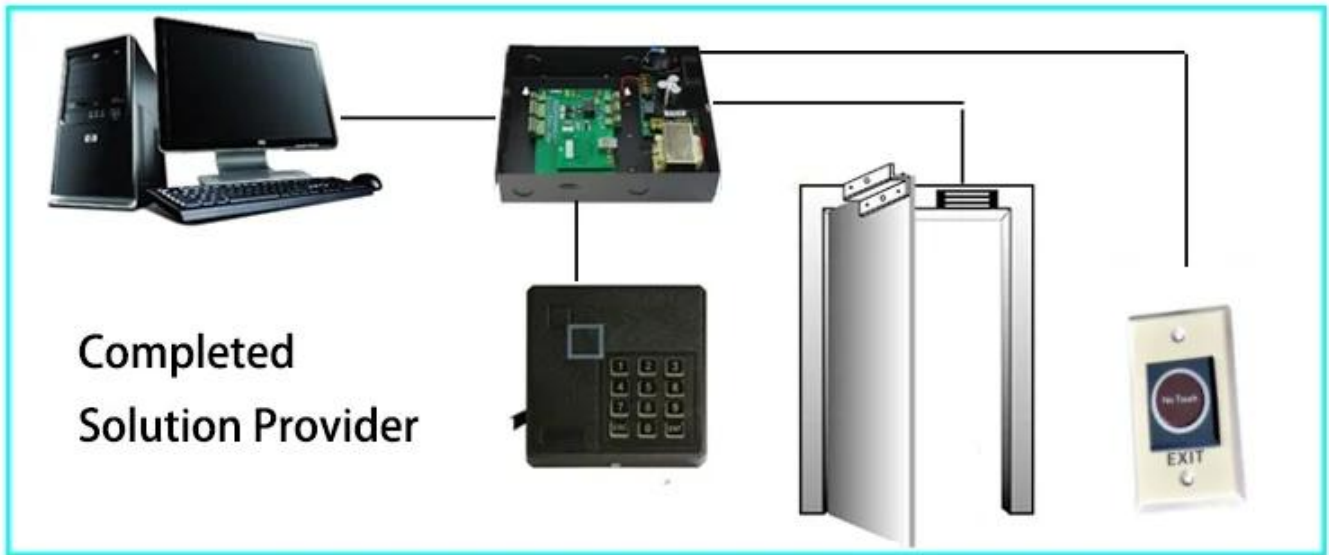

EM LOCK LOCK BRACKET Wiegand RFID RFID

NS





□□□□□□□□□□□□□□□□□□□□

K2B□86 * 86mm

□□□□□□□□□□□□□□□□□□□□

K9A□115 * 40mm

□□□□□□□□□□□□□□□□□□□□NO /

NC□K5B□86 * 86mm



□□□□□□□□□□□□□□□□ K14B□86 *
86mm

--	--	--	--	--	--	--

6/6

A

A T / T PayPal Western Union
DHL FedEx TNT UPS

A _____

A 5000 3~7 100,000 7~15

A _____ OEM _____

20RFID / NFC / RFID Keybods / RFIDRFID
1

