



□□□□□□□□□□

4.

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □

□ □ □ □ □ □ □ □ □ □ □ □ □

[illegible]

3
□
□
□
□
□
□ □
□ □
□ □
□ □
□ □
-
2
□ 0
H
0
5
-
4
□ 0
+
□
8
5
2
K
H
□ Z
□
□
□
K
H
z
□ □
□
0 □
□ □
□
□
3
5
x
7
4
□ x
□
8
5
m
m
□ 18




ACM703



■ Install Detector


The loop detectors must only be placed in dry rooms or control cabinets that are protected against all types of moisture and wetness. A distance of at least 10 mm from other devices must be maintained on each side. The ambient temperature must not exceed 65° C. The installation of the induction loop is described in other operating instructions.

■ Wiring Diagram

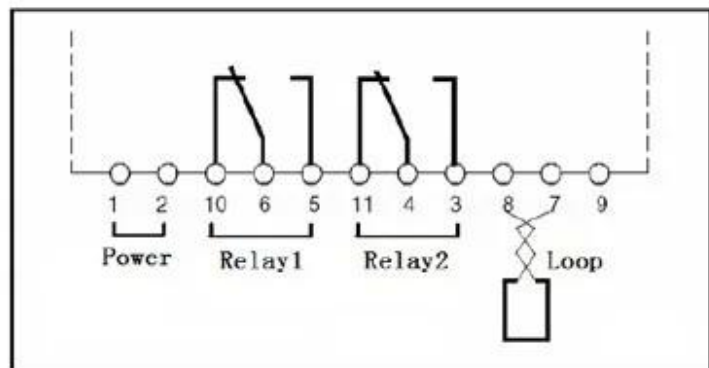

■ Operation and Indication

When the power is applied, the red Power LED will glow and the detector is tuning, the green Check LED blink about 3 seconds. The green LED will also glow whenever a vehicle is detected passing over the inductive loop. If a loop fault exists the green LED will come on and flash indicating a fault.

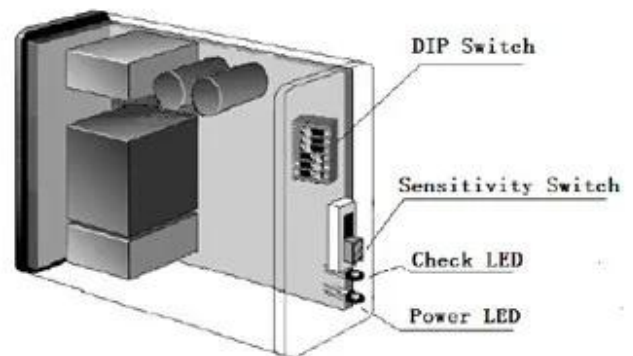

□□□□5□□□□□

uhf ACM812A ACM802A ACM818A ACM801A
ACM801A 200





ACM812A
2.5m UHF RFID reader
26mm RS232 / 485

ACM818A
10-20m UHF RFID reader
26mm RS232 / 485

ACM802A
8-10m UHF RFID reader
26mm RS232 / 485



ACM801A
10-15m UHF
26pin RS232 / 485

ACM 8017
UHF
UHF + WIFI + GRPS

ACM 918K
UHF 4

1. 產品規格

1. 產品規格 24
2. 產品規格
3. OEM / ODM
4. & A
- 5.
- 1.
- 2.
3. 2/3
6. 1/5 7/30
7. T / T

2. 產品規格

Q1. 產品規格
A. E

Q2. 產品規格
A. T / T Paypal
DHL / Federal Express / TNT UPS

Q3. 產品規格
A.

Q4. 產品規格
A. 5000pcs 3-7 100,000pcs 7-15

Q5. 產品規格
A. OEM

Q6. 產品規格
20 RFID / NFC / RFID / keybod / RFID rfid 1

