




1 10mm 8.7mm
 2
 3 PET PVC
 4 4C LOGO
 5
 6
 7 PC



REF ID: A66874

V **a** **r** **d**



Chip type	Protocol	Capacity	Anti collision	Function
NTAG® 213	ISO14443A	180 Byte	NO	Read/write
NTAG® 215		540 Byte	NO	
NTAG® 216		924 Byte	NO	
NTAG® are registered trademarks of NXP B.V. and are used under license.				
MIFARE Classic® 1K	ISO14443A	1KB	NO	Read/write
MIFARE Classic® 4K		4KB	NO	
MIFARE Ultralight® EV1		640 Bit	NO	
MIFARE Ultralight® C		1184 Bit	NO	
MIFARE and MIFARE Classic® are registered trademarks of NXP B.V. and are used under license.				
MIFARE and MIFARE Ultralight® are registered trademarks of NXP B.V. and are used under license.				
MIFARE Plus® 1K	ISO14443A	1KB	NO	Read/write
MIFARE Plus® 2K		2KB	NO	
MIFARE Plus® 4K		4KB	NO	
MIFARE and MIFARE Plus® are registered trademarks of NXP B.V. and are used under license.				
MIFARE® DESfire® EV1 2K	ISO14443A	2KB	NO	Read/write
MIFARE® DESfire® EV1 4K		4KB	NO	
MIFARE® DESfire® EV1 8K		8KB	NO	
MIFARE® DESFire® are registered trademarks of NXP B.V. and are used under license.				
ICODE® SLIX	ISO15693	1KB	Yes	Read/write
ICODE® SLIX-S		2KB	Yes	
ICODE® SLIX-L		512 Bits	Yes	
ICODE® SLIX-M		1KB	Yes	
ICODE® are registered trademarks of NXP B.V. and are used under license.				



We make it smarter, make it easier



Anti-metal Material




Back



Front



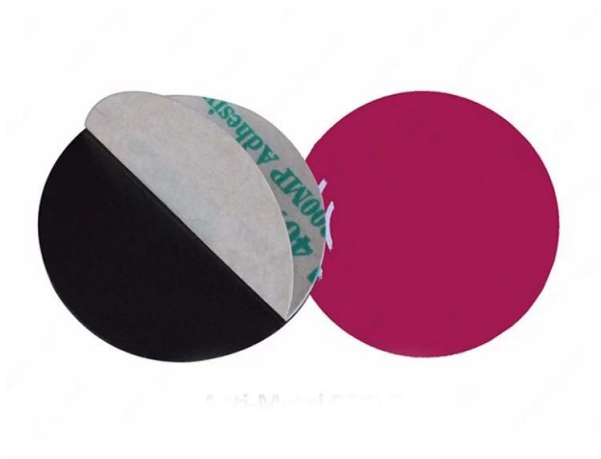

APPLICATIONS



OPENGED OR NOT

NFC helps you to find out
More information
Sourcing

Cashless Pay

One Mobile phone
One World
Easy Pay & Modern Life
High Security



DATA Exchanging


Easy & Fast
Exchanging personal info
No need business card

Social Media

Launching your App
Connecting the world
Sharing with friend
Cool, funny and convenient





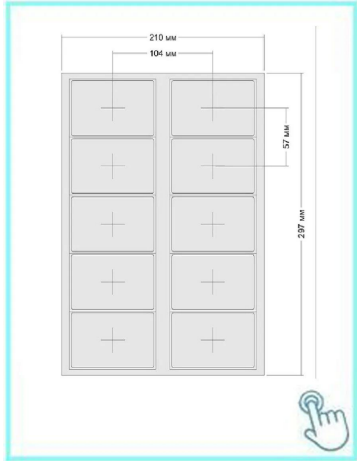

ACM-EMI-S

125KhzTK4100RFID

ACMM-MF1

13.56MHzMF1K F08RFID

ACM-INLAY

125khz13.56mhz860-960mhz





□□□□□□□□NFC□□□□□

--	--	--	--	--

[illegible]

