


Single Infrared Beam Sensor



Detection distance up to 20 meters

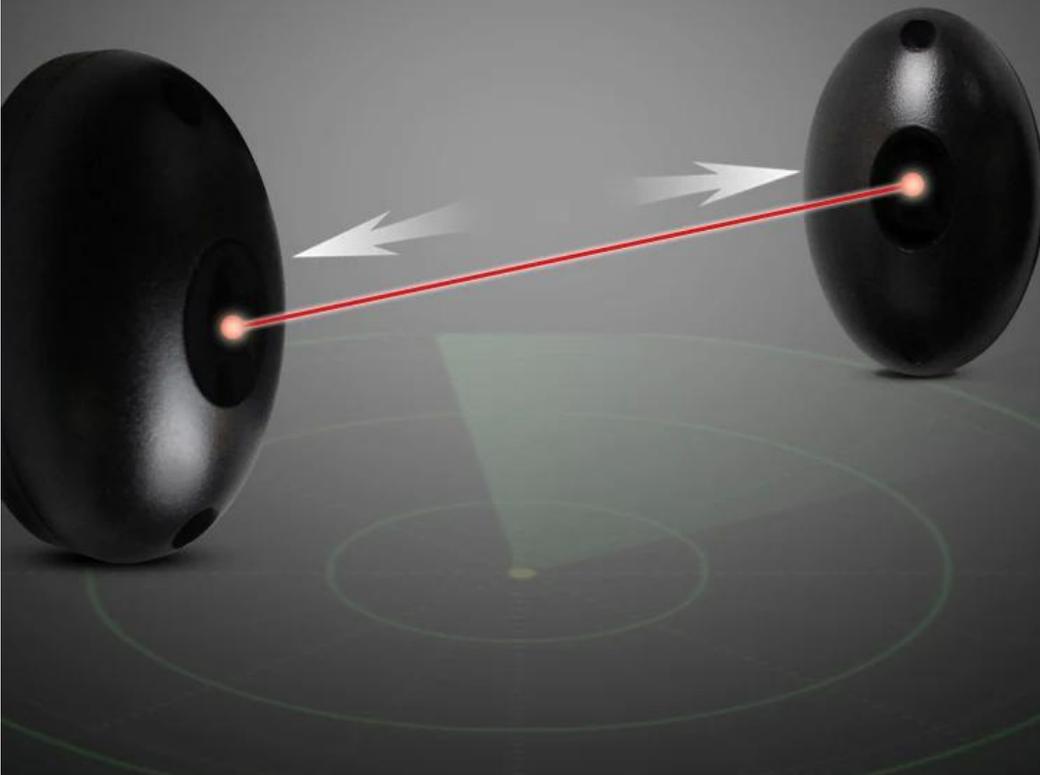

Infrared light receiver



Normally open
normally closed switch.
■ Switch alarm mode
by jumper cap.

Signal output

DC power supply positive

DC power supply negative

Infrared light projector



DC power supply negative

DC power supply positive

Installed on both sides of the gate

Invisible to the naked eye, the photo is just a simulation



Vehicle barrier

Pedestrian gate



Automatic door, sliding door switch, anti-pinch induction

Installed on both sides of the door, wired to connect the door controller.
When someone passes the infrared beam that is folded in half, the door will open automatically.





Door and window security

The shooting is installed on both sides of the door and window, the main unit is installed indoors, when someone intercepts the infrared beam, the host will alarm



Anti-theft, can not be used alone, need to install the alarm host



025576x49.2x21.6mm

RFID

ACM Goldbridge

RFID 1 20 RFID RFID RFID RFID RFID UHF



RFID

3 20 rfid



**SHENZHEN GOLDBRIDGE
INDUSTRIAL CO., LTD**

地址

深圳市宝安区西乡街道铁岗社区铁岗社区518031

Tel: + 0086-755-83767678 Fax: +

0086-755-88391348

手机号码

Mob / whatsapp / wechat: +

0086-13554918707

Skype: lily-jiang1206

E-mail: sales@goldbridge.sz.com

网站: [http:// www. goldbridge sz.com](http://www.goldbridge.sz.com)