

328 USB 1D
USB
Silicon LABS

00000000:

00	ABS
000	00*0*00: 170*88*70mm
00	DC5V/300mA
0000	135±10g
000000000000	USB0RS-232
0000000	
0000	00CMOS0000
00	00LED000
000000	32000MCU
000000	UPC-A0UPC-E/E10EAN-130EAN-80ISBN/ISSN000039
	0000 39 (ASCII 000000)032 00000000000000 39 0000000025 0000
	000000000025 0000(Discrete20f5)0000000025 00000000
	00(NW7)0128 0000UCC/EAN1280ISBT128093 00001100
	0(USD-8)0MSI/000000000000/000000
0000000	3500000/0
00000000	000000000000000000
0000000	100650mm
000000000	00000000(LED)
0000000000	35%
0000000	00000360°0000±65°000±60°
0000	0 0 50 °C / 32 0 122 °F
0000	0 0 50 °C / 32 0 122 °F
0000	5 0 95% (0000000)
0000	0000000001.5m000000



Two Pairing Method


One Scanner To One Receiver



Multiple Scanner To One Receiver



Long Transmission Range

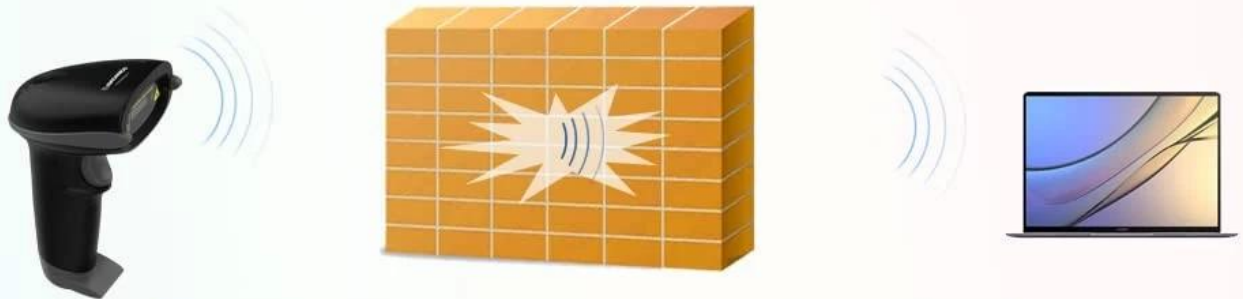


Under obstacles environment

Transmission Distance: 100m/ 328ft (Max)



In barrier free environment

Transmission Distance: 400 m/ 437yd(Max)




Instant Upload Mode

Synchronously upload barcode to your device when scanning



16M



Storage Mode

Store barcodes in internal memory then upload when you need it.
(Save up to 100000 codes)

2-in-1 Connections

No driver needed

Wireless



USB Wired



Plus & Play



PC



Laptop



Tablet



Phone



Mac OS



Windows



Linux



30 Days Working Once Charging

scans 2000 barcodes each day in auto-off mode




2600mAh



How to Use This Barcode Scanner?

1. For better scanning function, please hold this scanner at right angle, don't decode it at 90°.

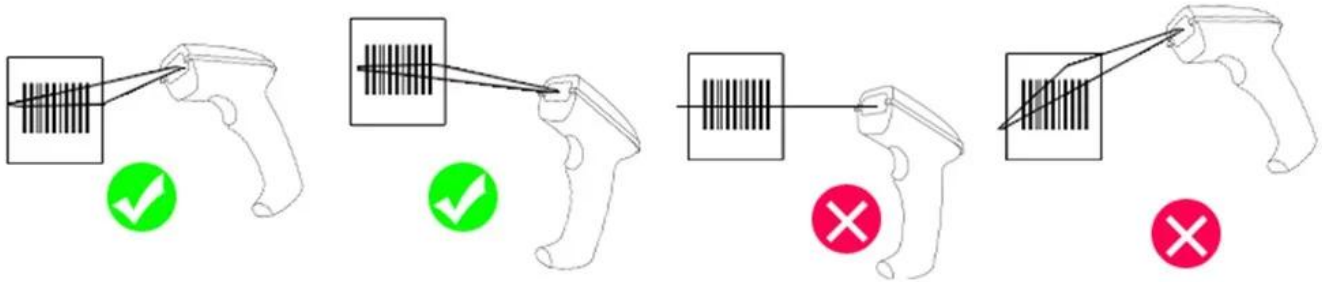

2. For truly decoding the barcode, scanning laser must cover the whole barcode.



How to Assemble/Disassemble the Cable?

Plug sharp things like toothpick or clip into the right hole and then pull out the cable easily.





Shakeproof



Super decoding



Compatible
different terminal



High Cost-Effective

WE PROVIDE THE MOST COMPLETE
PROFESSIONAL SCANNING APPLICATION



Logistics express
barcode



Supermarket
barcode



Medical
barcode



Factory
inventory



Machine
customization







Shipping







ACM26X RFID 非接触式

125Khz 非接触式 26 /34 非接触式
尺寸 115mm×75.5mm×16.8mm

ACM26G RFID 非接触式

125Khz /13.56Mhz 非接触式
尺寸 26/34 /RS232

KR600E RFID 非接触式

125KHz 非接触 ID/13.56Mhz 非接触式
尺寸 26 非接触





ACM-EMI-S RFID

125Khz EM

86×54mm

ACM-MF1 RFID

MF1 1K

ACM-ABS003 RFID

125Khz EM/13.56Mhz/UHF

:

- ACM Goldbridge 2
- ACM Goldbridge

