



$\mathbf{RFID} = \mathbf{CO} = \mathbf{$

1 2 V ₽ + 1 $\Box | 0$

□ □ P
[] [N] [] [] [] [] []

•	ı	_	
•			•
•			
	ı		

2.Wiegand 26

0000.10004.Reader





<u> ПППППППОЕМ / ОЕМПППППППППППППП</u>









Wiegand 26/34





Products


03. Three ways to open the door:

credit card, password, credit card+password



8000 user caracity storage and reading function; The password of the 4-6 bit is more difficult to crack than the fixed number of passwords; Three kinds of open form: password, credit ID card, password +ID card; Add cards and delete cards, extended voice and other functions.

Wiring diagram

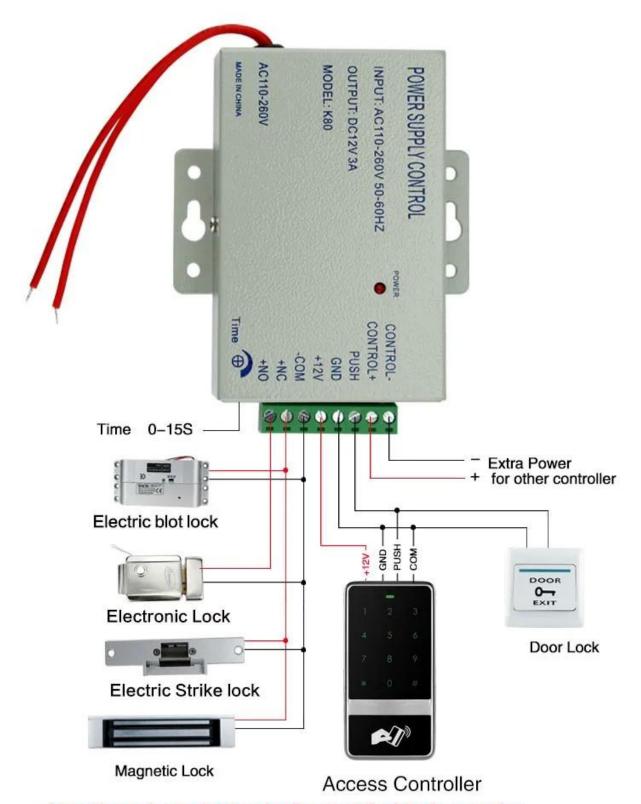

Attention when electronically contriled lock must be transferred to 0seconds delay,to prevent burning of electric lock.







ACM-Y100S

ACM-Y280

ACM-K2A

 $\begin{array}{c} \square K2A \square \\ \square \square 115 \times 70 \times 25 mm \square K2B \square \square \\ \square \square 86 \times 86 \times 25 mm \end{array}$







ACM-Y806-3A

23.OEM / ODM 4
-
Q_1 A_E
Q_2
Q03.00000000000000000000000000000000000
Q0400000000000000000000000000000000000
Q_5OOOOOEMOEMOE
Q_6Q_6