



無線LAN機能

Tuya WiFi 機能は、Tuya WiFi 機能を持つデバイスと接続するための **APP** を使用

接続

1. 電源をオンにし、電源ボタンを押して 12vDC の電源を供給します。
2. Tuya WiFi 機能を持つデバイスと接続します。
3. Tuya WiFi 機能を持つデバイスと接続します。

RF433 機能

RF433 機能は、RF433 機能を持つデバイスと接続するための

APP を使用

RF433 機能を持つデバイスと接続するための

RF433 機能を持つデバイスと接続するための

RF433 機能

RF433 機能は、RF433 機能を持つデバイスと接続するための 1. RF433 機能を持つデバイスと接続するための

仕様

サイズ: 86 mm x 86 mm x 22 mm

電源: DC 12V

電源: DC 12V

電源: DC 12V

電源: DC 12V

電源: DC 12V

電源: DC 12V

1. 電源: 433.92MHz

2. 電源: DC 3V

3.消費電力: <10mW

4. 電圧降下: <100 mV (動作時)

5. 動作温度: -10°C~70°C

6.寸法: 86*86*15.5 (mm)

7.電池: CR2032

※※※※※※※※※※※※※※※※

1 * 電池 (CR2032)

※※※

1. 動作電源: 12VDC 動作電圧範囲: 10V~14V

2 無線 LAN (WiFi) 機能: 標準 IEEE 802.11b/g/n

3 動作モード: 待機モード / 動作モード

WiFi DOOR EXIT BOTTON




Works with
Smart Life



Works with
Tuya



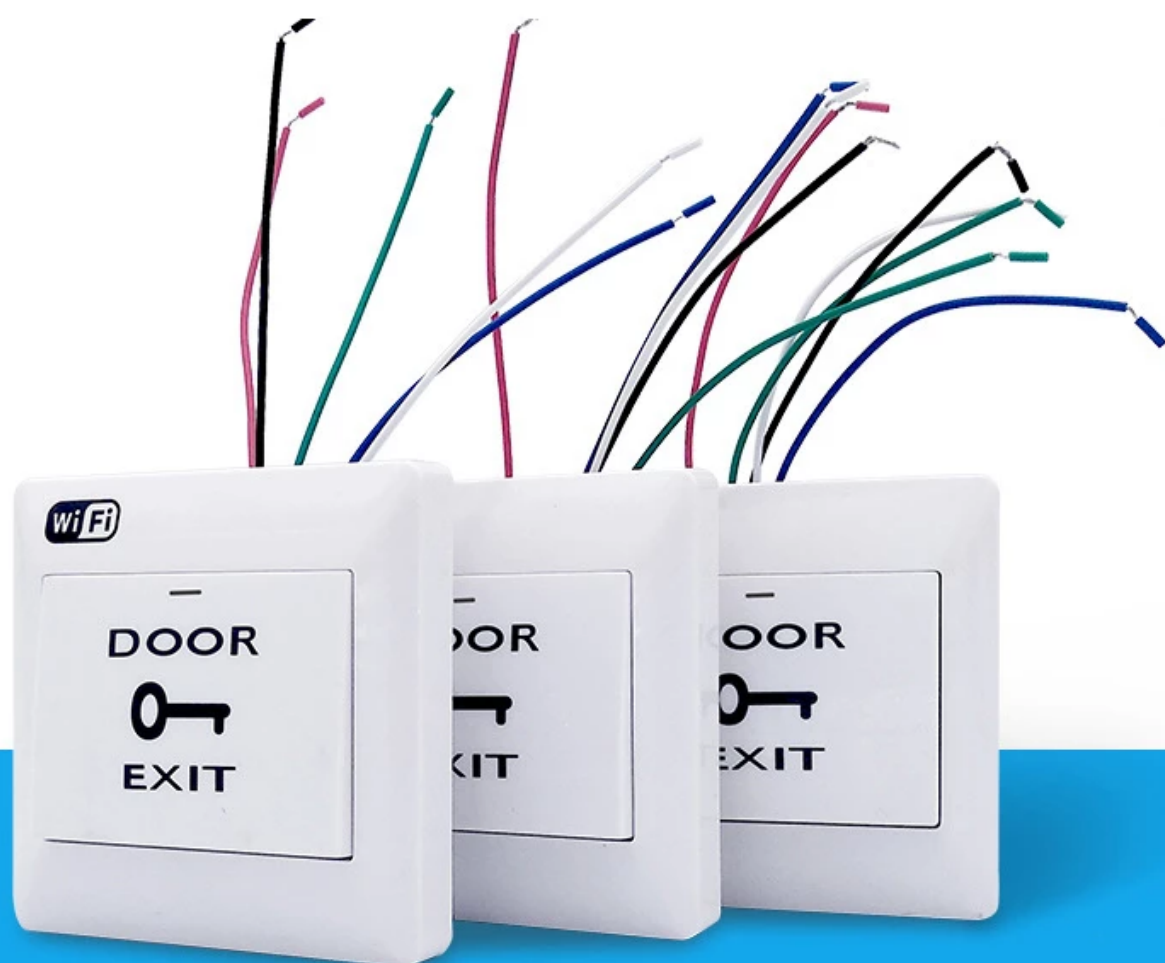

WiFi remote control



RF remote control



Ordinary jog to open the door



Sharing function



Timing function



Direct parallel access control power supply

RF433 remote control


The device is installed in a weak current system with a WIFI environment, and the switch can be remotely controlled within a certain distance.



APP remote control

Simple and intuitive switch button·Switch status is synchronized with the mobile phone in real time

The device is installed in a weak current system with a WIFI environment, and the mobile phone can remotely control it in any place where there is a signal.

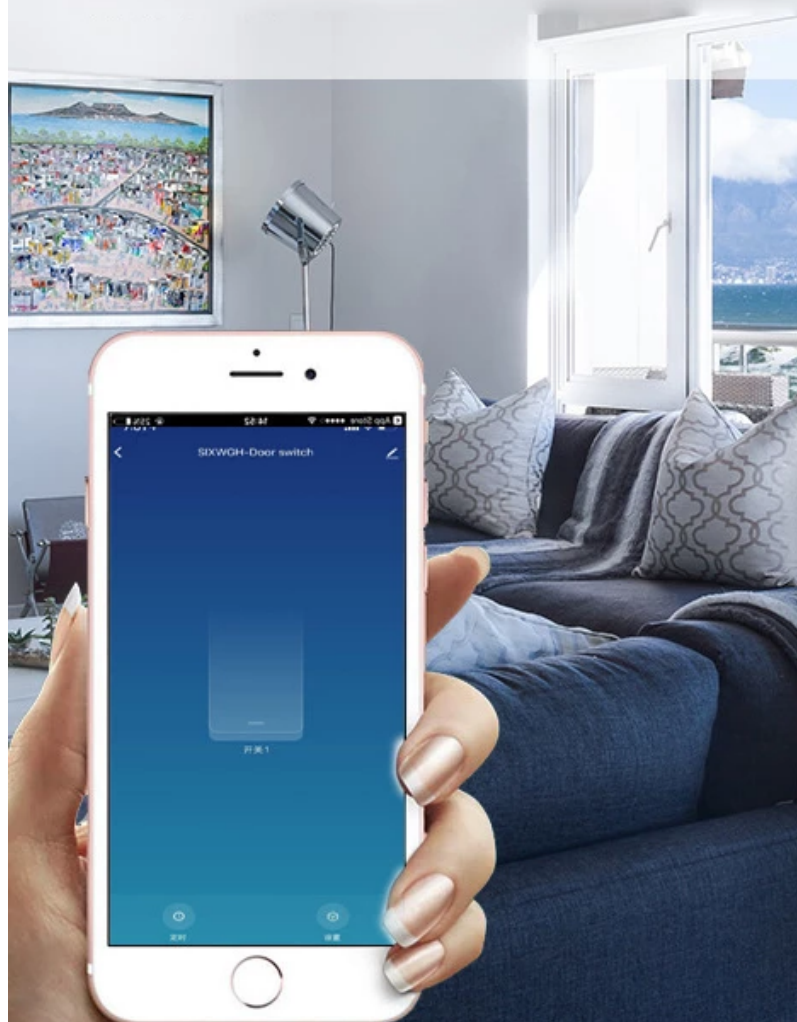

□□□□


Door Release Exit Button



— Door Release Exit Button —

Factory Wholesale & Door Release Exit Button



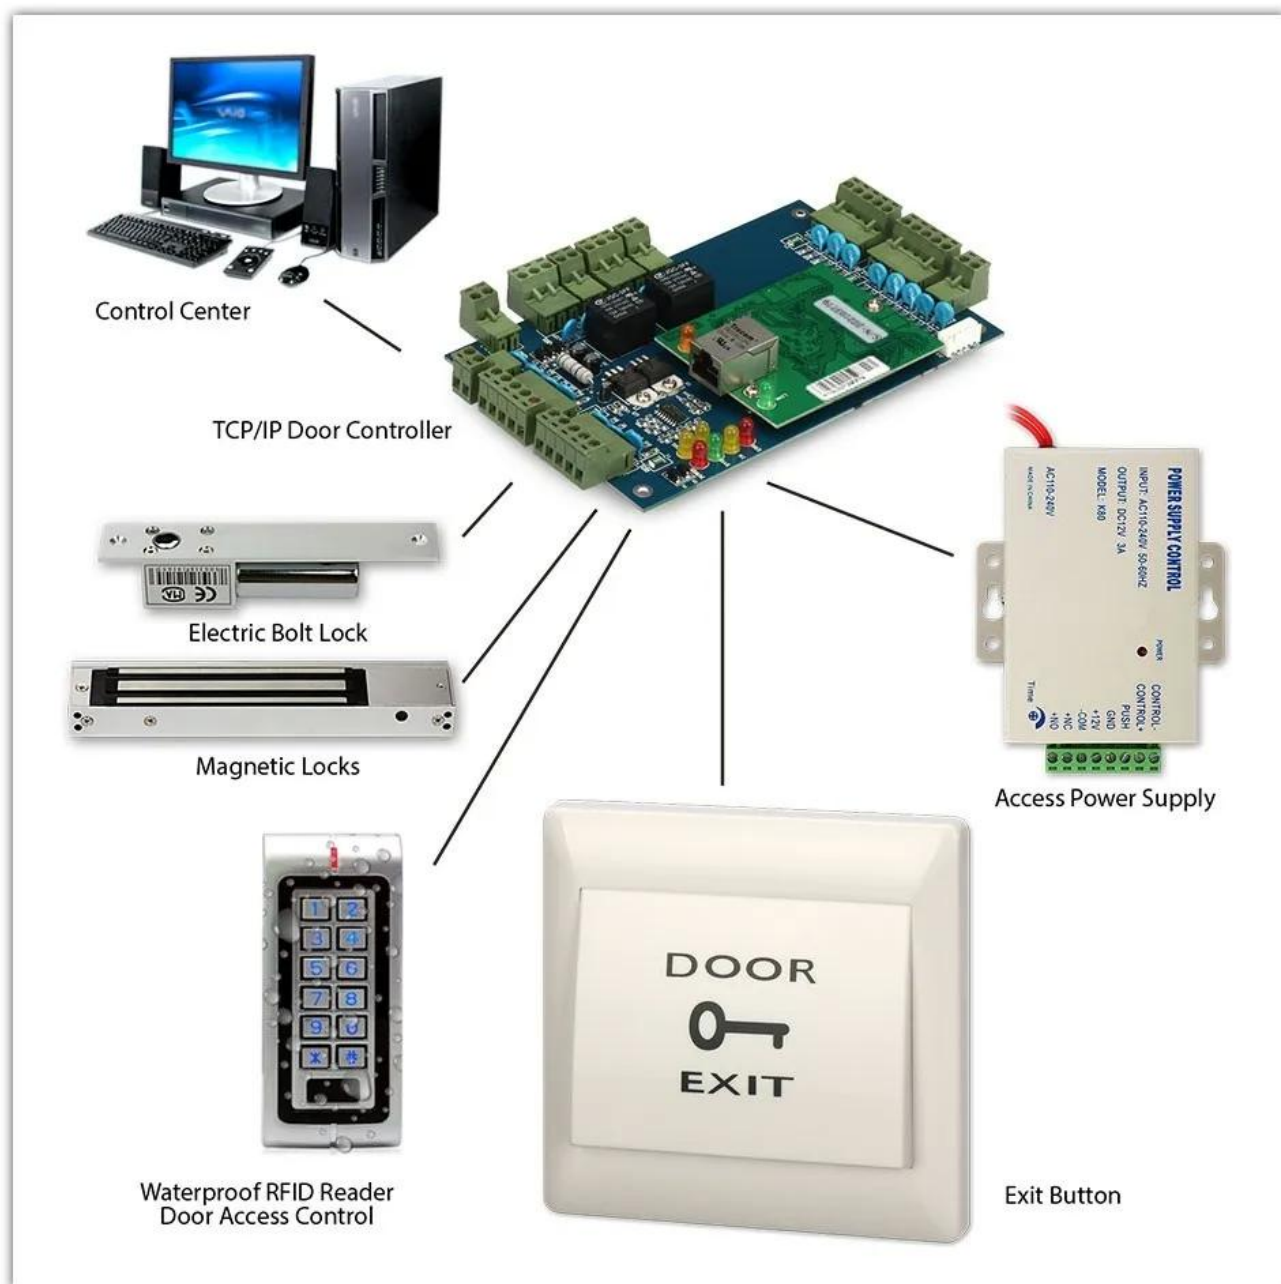

□□□□: □
 □□□□□□: 0.3kg
 □□□□□□□□: 10cm x 10cm x 8cm



1. 24
- 2.
3. OEM/ODM
- 4.
- 5.:
- 1)
- 2)
- 3) 2~3
6. : 1~5 7~30

7: T/T

8: DHL FEDEX TNT UPS EMS SEA AIR

Q: 1.

Q: 1.

A:

Q: 2.

A: T/T

DHL FedEx TNT UPS

Q: 3.

A:

Q: 4.

A:

Q: 5.

A: OEM

Q: 6.

RFID NFC RFID RFID RFID 1