

Wholesale

ACM-Y138
FAIL
/

g **k** **5**

D
C 1 2 V

 m A F a i l S e c u r e ; F a i l S a f e
 P V C

01

Stainless steel panels, stable and durable.



02

Designed for Metal Frame drill a hole,then
install it directly.

03

Adjust Lock-tongue to NO style



NC / NO

--	--	--	--

- ACM Goldbridge 2
- ACM Goldbridge
-



01 Emb

Embedded Installation Design

Safe design to prevent external malicious lock slot is forced open.




A close-up photograph of a silver-colored metal bracket. It features a rectangular slot in the center and a small circular hole on the left side. The bracket is mounted on a dark surface.

02

Holding Strength

pass 500kg super linear static

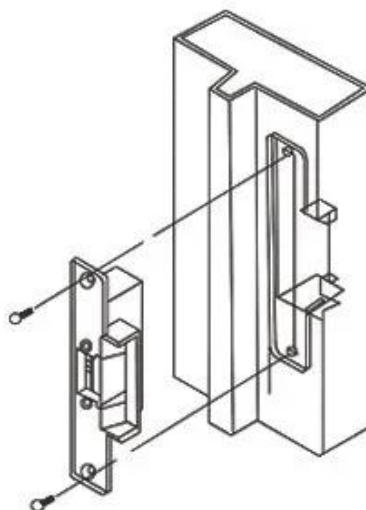

03

Suitable For

Narrow Wooden Door, Narrow Metal Door



1111

0000DHL000000TNT0UPS0EMS0EMS0Forwarder0000000000
0000000000000000000000

11

[illegible]



□□□□□□□□□□□□□□3□□□□□□□□□□□□□□□□

2019年12月31日，公司实现营业收入1,000,000.00元，较上年同期增长100.00%；实现净利润100,000.00元，较上年同期增长100.00%。



ACM-Y130

□□□□□□□□PVC□□□□□□□□□□□□NC /
NO□



ACM-Y131

☐ PVC ☐

☐ NC / NO ☐



ACM-Y132

280kg 600

You may need

□□□□□□□□□□□□□□3□□□□□□□□□□□□□□□□

20

"



ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-Y100S

□□□□□□□□□□

□□□□□NO / NCPOWEROCK□□□□□□□□



ACM-Y066

□□□□□□□□□□□□□□□□□□□□

□□□□□□□130x98x41mmworking

[□□□□□□□□□□□□□□□□□□](#)



ACM-WEG02

2-Port RS232 / RS485 / TCP / IP



ACM-K2A.

No Touch Door Release Exit Button K2A
115 * 40mm; K2B 86 * 86mm



ACM-Y806-3A.

12V / 3A



ACM-Y280

□□□□□□□□□□280kg / 600□□□□



ACM-26X

125kHz Wiegand 26/34□□□□□□□□

□□115mm×75.5mm×16.8mm



ACM-EMI-S

125kHz em□□□□□□