

[illegible]

Y-500U

[illegible]

9 L X 2 5 W X 2 H M D C 1 2 V 9 6 m A 8 m A 1 1 k 9 8 m m

C


OEM / ODM



UW-500U-LED

Feature: Fail Safe
Face Plate: 185Lx25.7Wx37H(mm)
Bolt: 16(length)x12.7(diameter)(mm)
Voltage: DC12V
Start Current: 960mA



Standby Current: 180mA
Solid Bolt : polishing housing, 1000Kg Holding Force
Suitable For: Electric Bolt For Narrow Door
Signal Outpu: Door status Output,NO/COM
Surface Temp: Low Temperature
Induction Distance: 8mm
Special Designed: Tested to 500000 operations
Plate material: Stainless Steel
Weight: 1.2kg

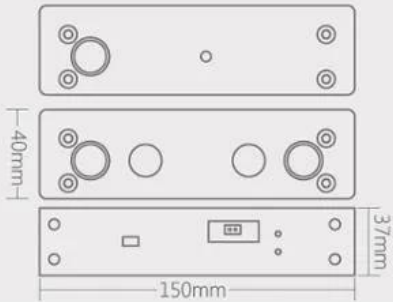




STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□□□

☐ DHL
 ☐ TNT
 ☐ UPS
 ☐ EMS
 ☐ EMS-Forwarder

11

□□□□□□□□1□□□□1unit□□□□□□□□20pcs□

□□□□□□□52 * 29 * 12cM□□□□□14kg□□□□□□□50□□□□



ELECTRIC DROP BOLT LOCK

1pcs

Made in China

ACM-Y500A



5608-800-2

ELECTRIC DROP BOLT LOCK

1pcs

Made in China

3

20
3
20



ACM-Y100S 2

100mA / 900Mapower
2pin.

ACM-Y500A.

NC

ACM-Y100S 5

5

5

You May Need



ACM-Y280

280kg / 600

ACM-Y100S

PVC

NC / NO

ACM-Y066

130x98x41mmworking



ACM-Y700

ACM-Y600

ACM-Y601

□□□□□□□□□□□□□□□□



ACM-WEG02

□□□□□□2□□□□□□□□□□□□□□□□

□RS232□RS485□TCP / IP□□□□□□□□□□

ACM-K2A.

No Touch Door Realese

ExitButton□K2A□115 * 40mm; K2B□86 * 86mm

ACM-Y806-3A.

□□□□□□□□12V / 3A

[illegible]

- 1 24時間営業
2 各種商品の取り扱い
3 OEM / ODM対応
4 Fashion Design / Reusable
5 各種商品の取り扱い
1 各種商品の取り扱い
2 各種商品の取り扱い
3 各種商品の取り扱い 2~3時間営業
6 各種商品の取り扱い 1~5時間営業 7~30時間営業
7 各種商品の取り扱い T / T対応
8 DHL / FedEx / TNT / UPS / EMS / EMS / EMS / Forwarder 各種商品の取り扱い

□□□□

- ACM Goldbridge 2
- ACM Goldbridge
-

11

ACM Shenzhen Goldbridge

RFID 20 RFID
RFID RFID RFID RFID RFID
UHF

