



□□□ □□□□ □ **12V 7A** □□ □□□



□□□□ □□□□

Protective cap for terminals




Copper silver plated terminals



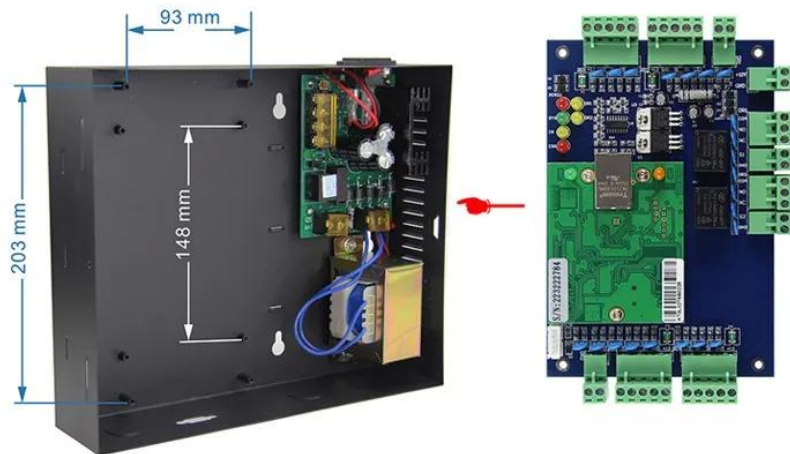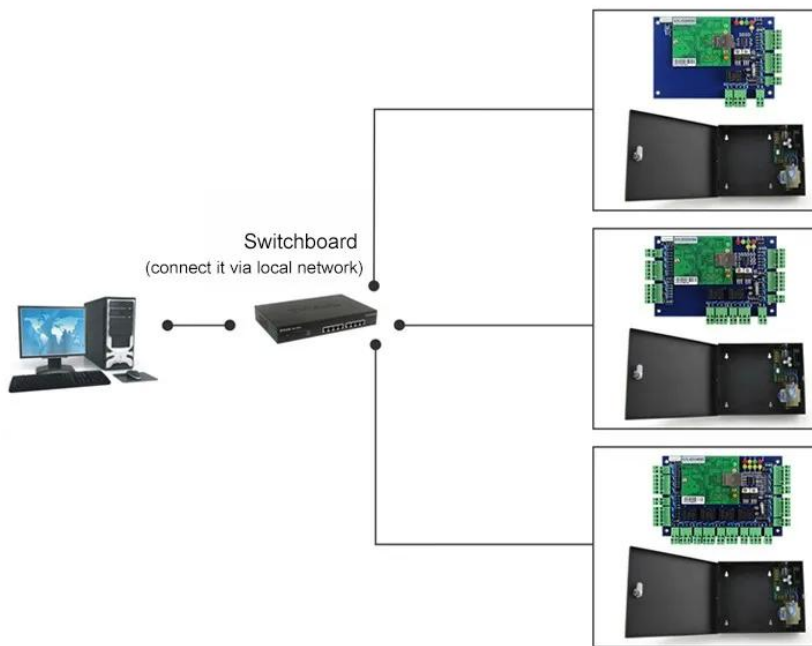

Kindly remind:

All network control board must configure with access power supply.
1 board for 1 power supply

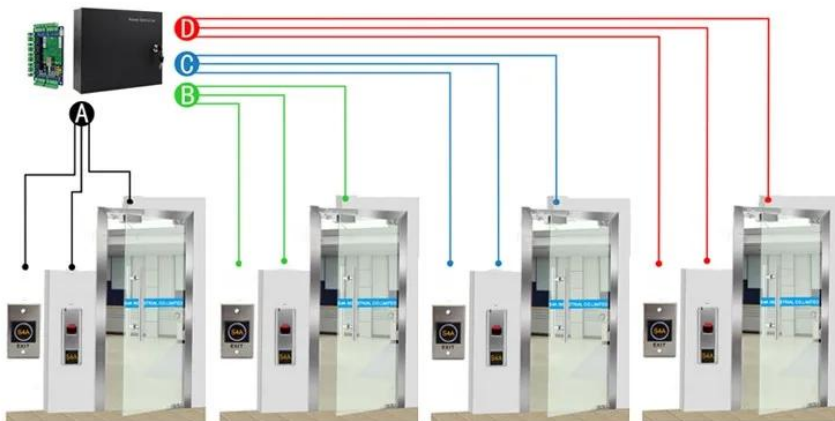

ACM-WEG04

Four doors 1 way: Control 4doors (Enter by Swipe cards and Exit by Push button)


Scope of Application



Port



School



ॐ नमो भगवते वासुदेवाय ॥
 ॐ नमो भगवते वासुदेवाय ॥
 ॐ नमो भगवते वासुदेवाय ॥



□□ □□ (□□ □□ □□)

[illegible]

You May Like



ACM-K2A / B.

□□ □□ □□ LED□□□□ □□ □□ □□



ACM-Y280.

□□ □□ □□□ (280kg / 600lbs)



ACM-Y806-5A.

□□□□ □□□□□□ □□ □□ □□ 5A



ACM225.

RFID 12KHz.



ACM-210.

RFID Wiegand



ACM26X.

125KHz EM RFID : 115mm × 75.5mm × 16.8mm



ACM Shenzhen Goldbridge

RFID 20 . RFID . RFID , RFID , RFID .

