



Installation fitting for electromagnetic lock support

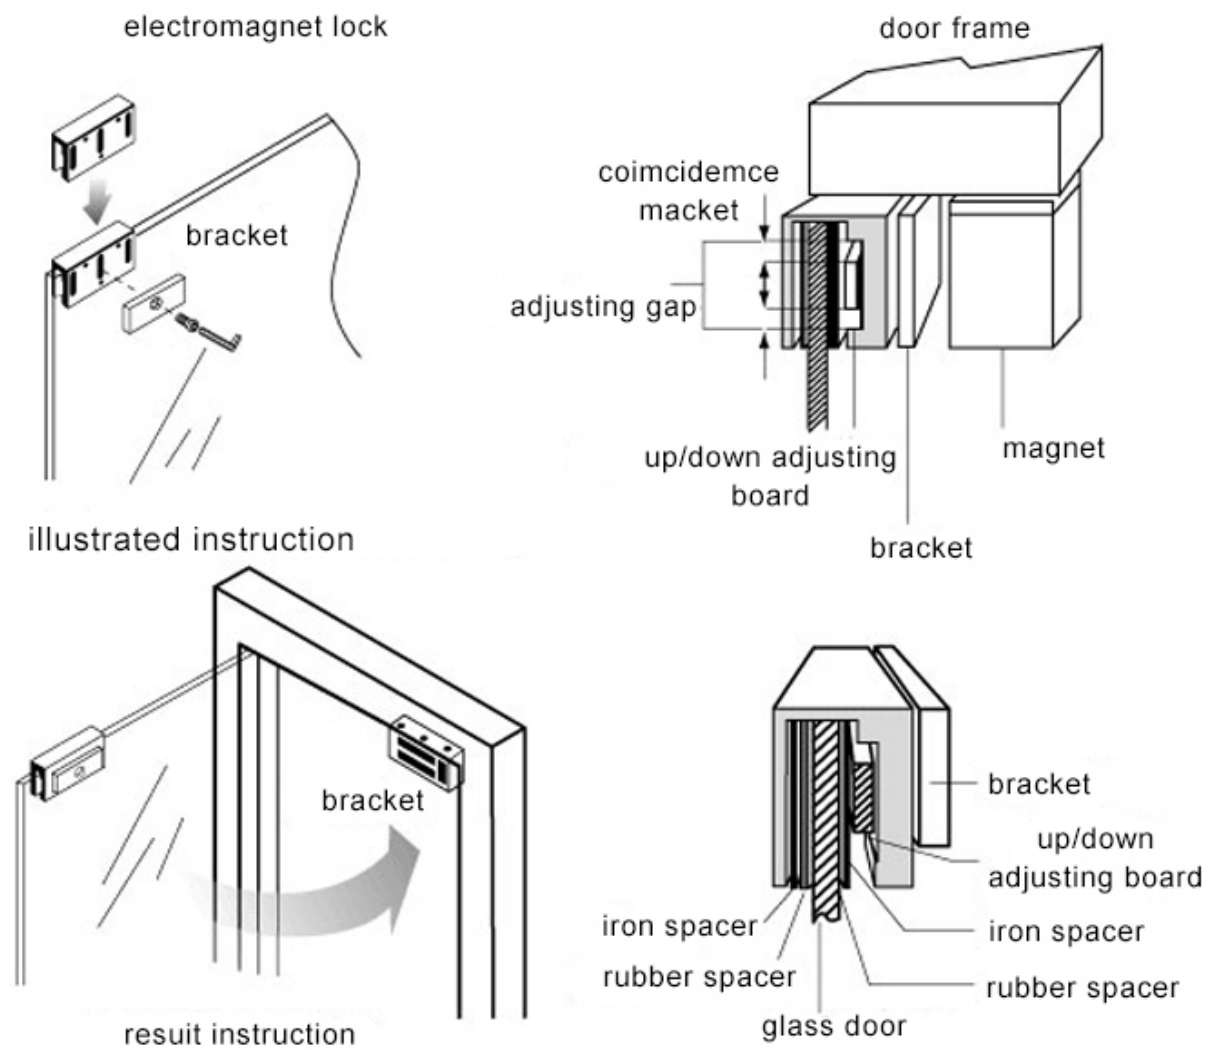


STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□ □ □□

□□ □□

□□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR□□ □□□ □□ □□□□.

□□

□□ □□□ □□ : □□ □ 1unit, □□ □ 10pcs,

□□ □□ : 26 * 26 * 10cm, □□□ : 46kg. □□□ □ 50 □□ □□





ACM-Y280N

□□ □□ □□ (280kgs / 600lbs) □□ □□ : □
□□□□ □, □□□ □, □□ □, □ | □□ □

ACM-Y180

□□ □□ (180kg / 300lbs) □□□□ □□ □□
2Bolts Fail safe. □□□ □□ : □□ □, □□ □, □
□ □, □□ □.

ACM-Y280

280kg (600lbs) 鋼 鋼 鋼 鋼 鋼 鋼 : 鋼
鋼 鋼, 鋼 鋼, 鋼 鋼, 鋼 鋼.



ACM-Y350

鋼 鋼 鋼 鋼 鋼 350kgs (800lbs) 鋼 鋼
鋼 : 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼, 鋼 鋼.

ACM-Y500

鋼 鋼 鋼 鋼 鋼 500kgs (1000lbs) 鋼 鋼
鋼 : 鋼 鋼 鋼, 鋼 鋼, 鋼 鋼, 鋼 鋼.

ACM-Y280-W

鋼 鋼 鋼 鋼 鋼 鋼 280kgs (600lbs). 鋼 鋼

注意： 请仔细阅读， 正确安装， 使用， 维护。

You may need



ACM-Y100S

该锁体 (5PIN) 适用于 5 线制锁体
锁体

ACM-Y130

该锁体 (NC / NO 锁体)
锁体 : 110x28x31mm

ACM-Y066

Intelligent Smart Lock (智能锁)

尺寸 : 130x98x41mm

可 安裝 在 各種 鋼 材 上



ACM-Y180-L

180kg 可 安裝 在 L 型 鋼 材

ACM-Y180ZL

180kg / 300lbs 可 安裝 在 ZL 型 鋼 材

ACM-Y180-ZL

180Kg 可 安裝 在 ZL 型 鋼 材

條款 條款

- 1, 我們 24 小時 服務
- 2, 我們 提供 各種 樣式, 及 價格 及 品質 服務。
- 3, 我們 OEM / ODM
- 4, 我們, fashin desing, 我們 有 專業 設計, 我們 有 專業
- 5, 我們 有 專業 :
- 1), 我們 提供 專業 設計 服務 及 專業 設計 服務。
- 2), 我們 提供 專業 設計 服務 及 專業 設計 服務
- 3), 我們 有 專業 設計 服務 及 專業 設計 服務 2-3 小時 服務。
- 6, 我們 有 : 我們 有 1 ~ 5 小時, 我們 有 7 ~ 30 小時
- 7, 我們 : 我們 有 專業 設計 服務 : T / T, Western Union, Paypal
- 8, 我們 : 我們 DHL, FEDEX, TNT, UPS, EMS, SEA 及 AIR 我們 有 專業 設計 服務 及 專業 設計 服務 及 專業 設計 服務。