



此款 180kg 300lbs 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸
 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸 磁吸
 此款 180kg(300lbs) 磁吸 磁吸 磁吸 磁吸

1
 7
 L
 x
 4
 W
 H
 (mm)

1
9
L
x
1
9
□
□
□
□
W
□
:
1
H
(
m
m
)
1
8
k
□
g
□
□
3
.
□
□
)
1
2
/
2
□
M
D
:
□
□
□
□

[N O T E S / C O M M E N T S](#)


F
a
i
l
S
a
f
e
,
☐
☐
☐
☐
,
☐
☐
:
☐
☐
,
☐
1
2
V
/
2
4
V
D
C
☐
☐
☐
☐
☐
☐
☐
☐
☐
:
,
☐
☐
☐
☐
☐
1
☐
:
4
k
g

- 重量 約 180kg, 300mm.
 - 電圧 12 VDC(約).
 - 電圧 12VDC 約.
 - MOV 約 約 約 約.
 - 約 約, 約 約, 約 約, 約 約.
 - LED 約 約 約.
 - 約 約 約(NO/NC/COM)
 - 約 約 約(NO/NC/COM)
 - 約 約 約 約.
 - 約 約, 約 約 約 約.
 - 約 約 約 約.
 - 約 約 約 約 約 約.
 - 約 約 CE 約, 約 約 MA 約
- 約 約, 約 OEM/ODM





ພວກ ພວກ ພວກ ພວກ ພວກ LED ພວກ ພວກ ພວກ, ພວກ ພວກ ພວກ ພວກ, ພວກ ພວກ ພວກ . ພວກ ພວກ ພວກ ພວກ .
 ACM-Y180 ພວກ ພວກ ພວກ ພວກ ພວກ. PCB ພວກ ພວກ ພວກ ພວກ ພວກ. ພວກ 12v&24v ພວກ ພວກ 7 ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ . ພວກ ພວກ ພວກ ພວກ PCB ພວກ. ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ. ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ .

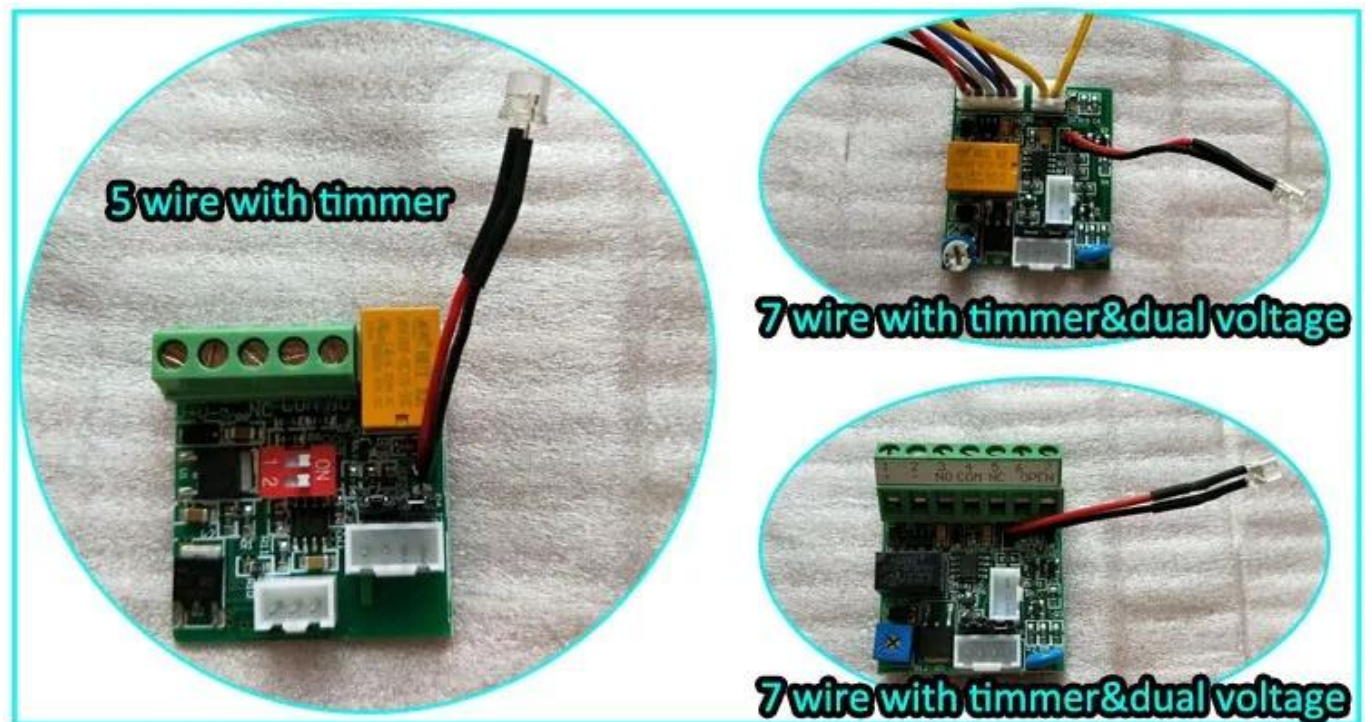


ພວກ ພວກ


- ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ, ACM Goldbridge ພວກ ພວກ ພວກ 2 ພວກ ພວກ.
- ພວກ ພວກ ພວກ ACM Goldbridge ພວກ ພວກ ພວກ.
- ພວກ ພວກ ພວກ ພວກ ພວກ.

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

如何包裝

如何包裝

我們提供 DHL, FEDEX, TNT, UPS, EMS, SEA 及 AIR 的包裝服務。我們提供專業的包裝服務。

如何包裝

我們提供包裝：每件 1unit, 每件 10pcs,

每件尺寸：34*25*14cm, 每件重量：14kg。每件 50pcs 裝箱



You may need



□□□□ □□ □□ (280kgs/600lbs) □□ □□: □
□ □, □□ □, □□ □, □□| □□ □

180kg/300lbs) 2000 2000
 2000 2000: 2000, 2000, 2000, 2000.

280kg(600lbs) በቅዱስ ስጋው ያለበት የሰው ልግ፡ በእርሱ
የተከሰተ ነፃነት ብቻ አይደለም።



ACM-Y280-L

280kg/350kg □□ □□ □□ L □□□

ACM-Y180ZL

180kg/300lbs □□ □□ □□ ZL □□□

ACM-Y280-ZL

280Kg/350Kg □□ □□ □□ ZL □□□

□□□ □□□

- 1, □□ □□□□ 24□□ □□ □□ □□□□.
- 2, □□□□ □□ □ □□□, □□□ □□□□ □ □□ □□□□ □□

8, 00: 000 DHL, FEDEX, TNT, UPS, EMS, SEA 0 AIR 0 00000 000 00 000 00 000 000 00 00000 000 00 00000.

□□□ 20□ □□ □□□□ RFID □□/□□□□ □□/□□□□ □□□□/□□□□, RFID □□ □ □□□ □□ □□□ □□ □ □□□□ □ □□□□□.