



280kgs / 600lbs 112mm em lock with led / feedback

600lbs 112mm solenoid lock assembly, 112mm, 112mm, 112mm 112mm 112mm. 112mm 12 24 VDC 112mm.


112mm
112mm
112mm
112mm
112mm
112mm
5
6
L
x
8
1
112mm
112mm
112mm
112mm
4
6
H
(
m
m
)

1
8
L
X
3
3
8
W
X
4
4
H
.
(
m
m
)
2
8
k
g
x
0
0
0
L
b
s
x
2
)
1
2
/
2
4
4
V
D
C
.
0
0
0
0

1 2 V / 5 m A * 2 2 4 V / 2 5 m A * 2

□
□
□
□
,□
L
e
d
L
i
g
h
t
,
□
□
□
□
□
□
□
□
□
□
□
□
,□
1
2
V
/
2
4
V
D
C
□
□
□
□
-
1
~
+
5
5
C
□
□
□
~
1
3
1
F
)

ACM-Y280D 是 一个 模块。PCB 是 一个 模块 的 一个 模块。它 有 12v & 24v 的 两个 7 针 的 接口。它 有 一个 PCB 的 接口。它 有 一个 接口 的 接口。它 有 一个 接口 的 接口。

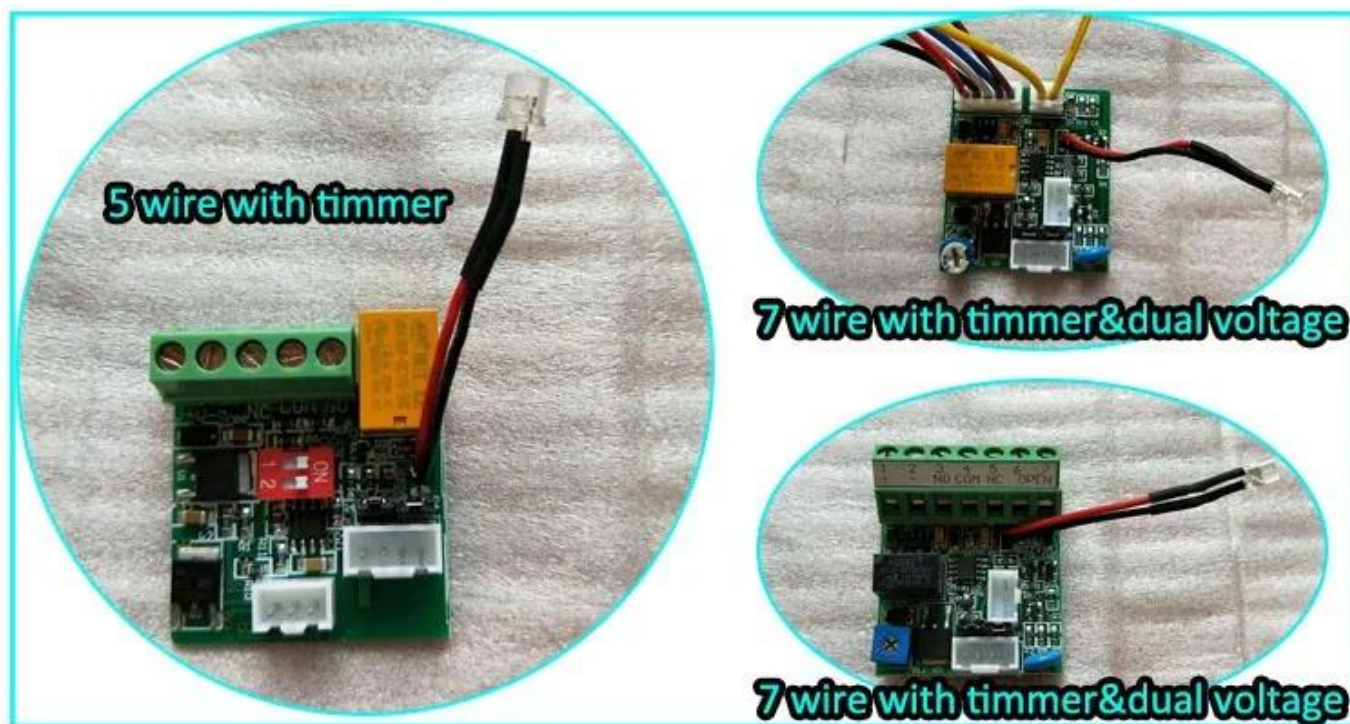


模块 接口

- 模块 接口 是 一个 模块 的 一个 模块。ACM Goldbridge 是 一个 模块 的 一个 模块。
- 模块 ACM Goldbridge 是 一个 模块 的 一个 模块。cahrge 是 一个 模块。
- 模块 接口 是 一个 模块 的 一个 模块。


模块 接口

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□ □ □□

□□ □□

□□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR□□ □□ □□ □□ □□□□.
□□□ □□ □□□□ □□□ □□ □□□□.

□□

□□ □□□ □□ : □□ □ 1unit, □□ □ 5pcs,
□□ □□ : 35 * 30 * 16cm, □□□ : 25kg.



You may need



ACM-Y280N

280kgs (600lbs) 280kgs : 280kgs
280kgs, 280kgs, 280kgs, 280kgs | 280kgs

ACM-Y180

180kg (300lbs) 180kg : 180kg
2Bolts Fail safe. 180kg : 180kg, 180kg, 180kg, 180kg.

ACM-Y280

280kg (600lbs) □□ □□ □□ □□ □□ : □□
□□□ □, □□□, □□ □, □□□ □.



ACM-Y280-L

280kg / 350kg □□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

- 1, 00 000 24 00 000 00000
- 2, 00 0000 0 00 00, 0 000 0 00 000 00000.
- 3, 000 OEM / ODM
- 4, 000, fashin desing, 0000 0 00000 00, 00 00 00
- 5, 00 0 000 :
 - 1), 00 000 0000 00 000 0000 00 00000000.
 - 2), 00 000 0000 00 0 00 0 0000
 - 3), 000 00 000 000 000 00 0000 00 00 2-3 0 000 0000.
- 6, 00 00 : 00 000 0 1 ~ 5 0, 00 000 0 7 ~ 30 0
- 7, 00 : T / T, Western Union, Paypal 00 00 000 00 0 0000.
- 8, 00 : 000 DHL, FEDEX, TNT, UPS, EMS, SEA 0 AIR 0000 000 00 000 00 000 000 00 0000 000 00 0000.

Q : 1. $\frac{1}{x^2} = x^{-2}$ எனில் x இன் மதிப்பைக் காண்க?

[illegible]

□□□ □□, □□ □□ □□□□ (DHL, FedEx, TNT UPS □)□ □□□ □ □□□□.

Q : 3. ဘုရားရှိခိုးကို နေ့စဉ် ဖတ်ကြားခြင်း၏ အကျိုးအမြတ်မှာ မည်သို့နည်း။

A: 100 0000 00 000 00 0 0 00, 000 00 0 00 00.

Q : 4. எந்த எந்த மூலம் இவ்வாறு?

A : □□□ □□ □□□□. □□□□□ 5000pcs □□ 3-7 □, 100,000pcs □□ 7-15 □

[illegible]

A : 00, 00, 00 0 000 0000 00 00 000 000 000000. OEM 000 00 000000.

Q : 6. பெரிய பூங்கா எங்கே?

RFID / NFC / RFID / RFID, RFID