

125khz

□□□□ □□ □□ □□□ □□□□


1. 鋼 鋼鋼, 鋼 鋼
2. 鋼, IP66 鋼
3. 鋼鋼 鋼鋼 (鋼 鋼, 鋼 鋼)
4. 10,000 鋼 鋼鋼 (鋼鋼 鋼鋼 + 鋼 鋼鋼)
5. 鋼 鋼 2 鋼 鋼 : 鋼鋼鋼 鋼
6. 鋼 Bluetooth 鋼 鋼鋼鋼 鋼 (鋼 : 4.0 鋼)
7. APP 鋼 Android 4.3 鋼 IOS7.0 鋼
8. 鋼鋼鋼鋼 鋼 E- 鋼 鋼 鋼 : 鋼鋼鋼 鋼鋼 鋼鋼 鋼 鋼 鋼鋼鋼.

*Product Picture



The Bluetooth module can communicate with other Bluetooth modules.
The module supports 13.56MHz Mifare / 125KHz EM cards and can communicate with them.
The module also supports RS485.

Waterproof IP66

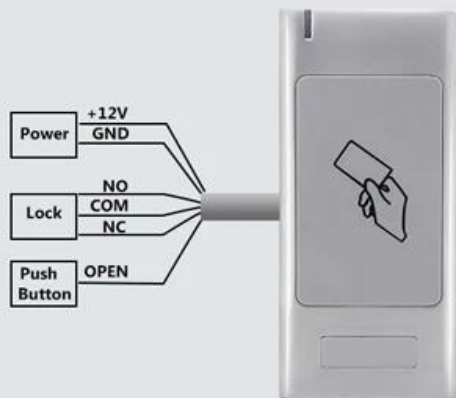

6 wires, easy installing


Metal Case, Anti-vandal



Built in LDR for anti tamper


容量	10,000
频率	13.56MHz Mifare (S6-BT MF) / 125KHz EM (S6-BT EM)
操作系统	Android 4.3 ~ IOS7.0
电压	12V DC
电流	<35mA
功耗	<90mA
接口类型	Mifare / EM
频率	13.56MHz / 125KHz
距离	2 ~ 6cm
分辨率	分辨率 : 4.0
响应时间	<20m(relate to environment)
响应时间	<2seconds
接口类型	(NO, NC, Common)
额定电流	2A
防护等级	IP66
工作温度	-20 ° C ~ + 60 ° C
湿度	0 % ~ 98 %
尺寸	尺寸
重量	L103 x W48 x H19 (mm)
重量	260g
包装	300

Common Power Supply

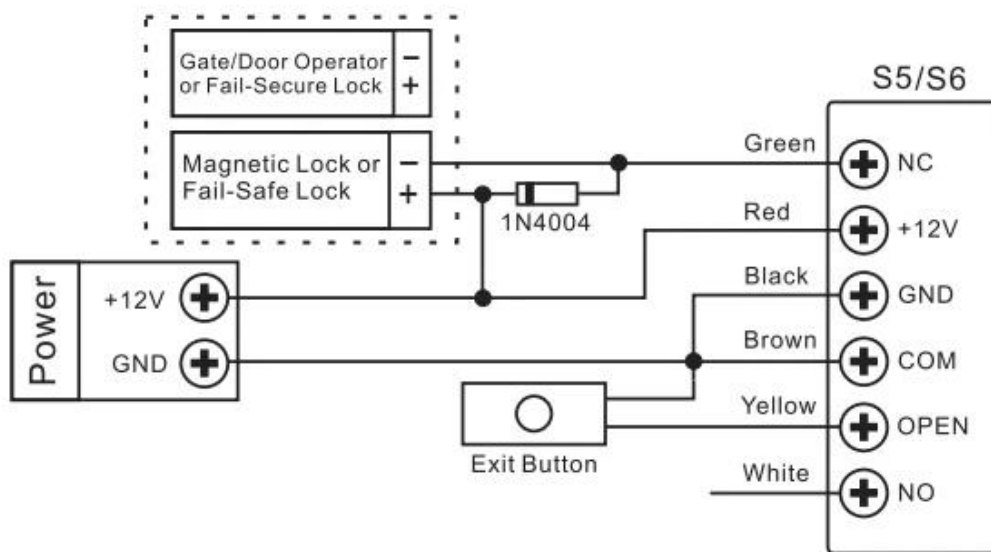


Product Dimensions

Product Size

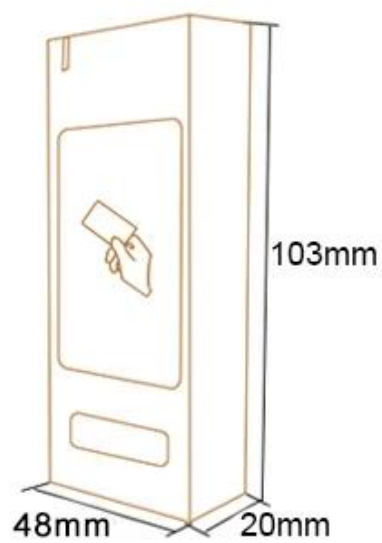

Box Size

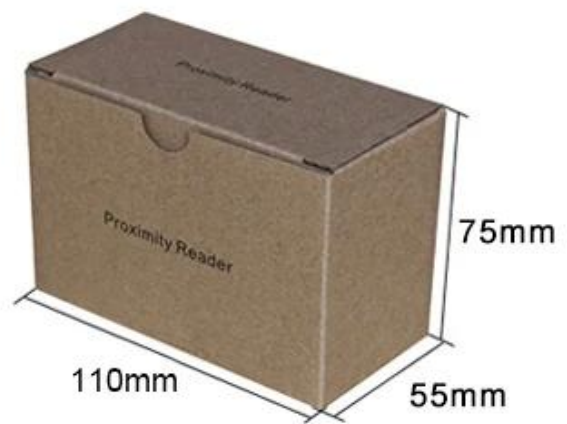

Carton Size



Packing	40pcs/carton
Weight	10.8kg



በገጽ ፩ ላይ የተገለጸውን የፋይል ስርዓት ይጠቀሙ፡፡



ACM223

በገጽ ፩ ላይ የተገለጸውን የፋይል ስርዓት ይጠቀሙ፡፡
EM 1000/4000 USer

ACM209-NW

በገጽ ፩ ላይ የተገለጸውን የፋይል ስርዓት ይጠቀሙ፡፡
125Khz EM

ACM208

በገጽ ፩ ላይ የተገለጸውን የፋይል ስርዓት ይጠቀሙ፡፡



ACM210

RFID 125KHz 125KHz EM, Wiegand 26bit

ACM225

RFID 125KHz EM, Wiegand 26bit

ACM211B

RFID 125KHz EM, Wiegand 26bit

RFID 125KHz EM, Wiegand 26bit

- 

A: ০০০ ০০ ০০০ ০০ ০০০ ০০০০০০. ০০ ০০ ০০ ০০ ০ ০০ ০০ ০০০ ০০০ ০০ ০০০০০০. ০০০ ০০ ০০০ ০০০০০০.

A: 00 00 0 T / T, 000, 000 000.
000 00, 00 00 00000 (DHL, FedEx, TNT UPS) 000 0 0000.

A : ০০০ ০০০০ ০০ ০০০ ০০ ০ ০ ০০, ০০০ ০০ ০ ০০ ০০.

A : 1000 個 10000. 10000 5000pcs 3-7 日, 100,000pcs 7-15 日

A : 00, 00, 00 0 0000 0000 00 00 0000 0000 000000. OEM 0000 00 000000.

በቅጽ 20 ላይ የተዘረዘሩት RFID ቅጽ / NFC ቅጽ / RFID ቅጽ / RFID ቅጽ, RFID ቅጽ ይጨምሩ በቅጽ 20 ላይ የተዘረዘሩት.