



350kgs 800lbs LED / 280kg 600lbs Mortise Concealed EM Electric Magnetic Lock

280kg (600 lbs) Mortise Concealed EM Electric Magnetic Lock

2
2
4
L
x
W
H
(
m
m
)

Advanatge

- 280kg, 600pounds.
- 12 24 VDC ().
- 12VDC.
- MOV .
- , , , .
- LED .
- (NO / NC / COM)
- (NO / NC / COM)
- .
- , .
- .
- .
- CE , MA


OEM / ODM





□□ □□□ □□□ □□ □□□ LED □□□□□, □□□□□ □□ □□□ □□, □□ □□□□ □□□ . □□ □□□□ □□□ □ □□□□.


ACM-Y280N□ □□ □□□ □□□□. PCB □□□ □□□ □□ □ □□□□. 12V □ 24V □□ □□□ □□ □ □□□ □□□ □ □□□□. □□ □□ □ □□ PCB □□□□□. □□□ □□□ □□□□□ □□ □□□ □□□□□□. □□ □□ □□□ □□□ □ □□ □□□ □□□□□□.

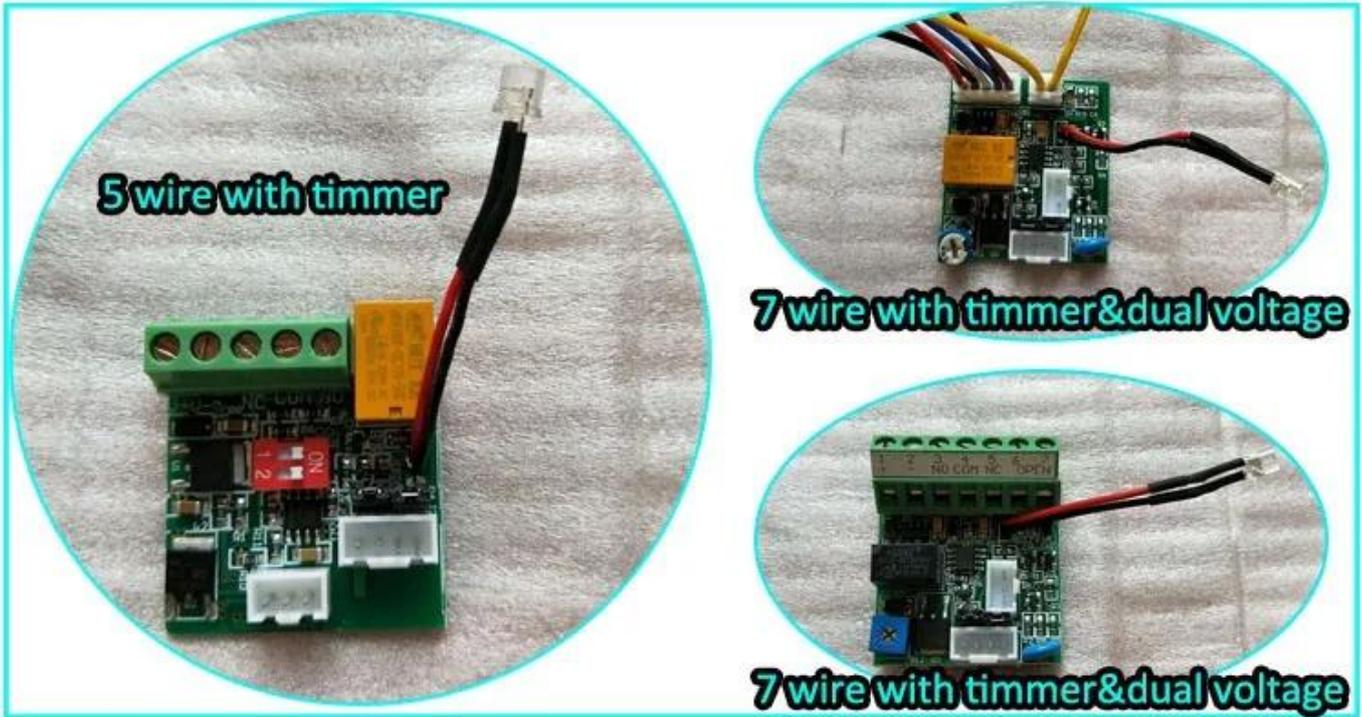


- □□□ □□ □□ □□ □□□□□□, ACM Goldbridge□ □□ □□□ □□ 2 □ □□□ □□□□□.
- ACM Goldbridge□ □□□□ □□□ □□□□□.
- □□□ □□ □□□ □□□ □□□□□□.

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured

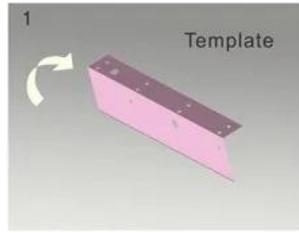

1 Fold the plate to 90° .

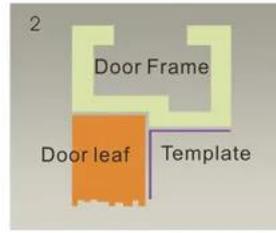


2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.

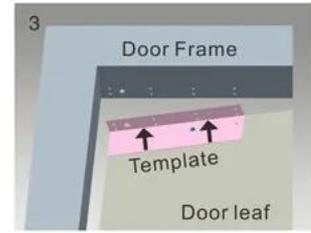


3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.

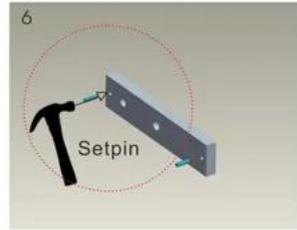

6 Strike the pin into the armature plate slightly (to avoid movement).

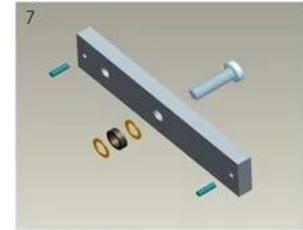


7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.

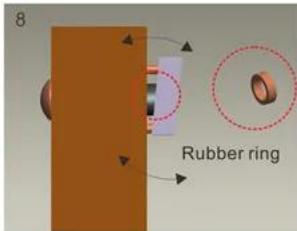


8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.

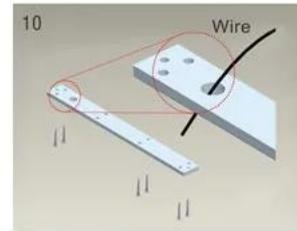


10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm

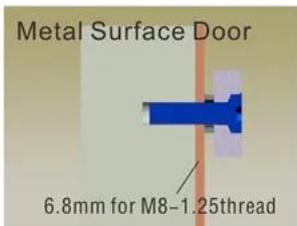

Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm



□□ □□

DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR Forwarders□ □□□ □□□□□ □□ □□□□.
□□ □□□ □□□ □□ □□□□.

□□□□

□□ □□□□ □□ : □□ □ 1 □ □□, □□ □ 10 □ □□,

□□ □□ : 35 * 30 * 16 cm, □□□ : 24kg. □□□ □ 50 □□ □□



You may need



ACM-Y280N

280kg (600lbs) 2Bolt Fail safe. 280kg : 280kg
280kg, 280kg, 280kg, 280kg | 280kg

ACM-Y180

180kg (300lbs) 2Bolt Fail safe. 180kg : 180kg, 180kg, 180kg, 180kg.

ACM-Y280

280kg (600lbs) □□ □□ □□□□ □□ □□ : □□□□
□□, □□□, □□□, □□□□ □.



ACM-Y280-L

280kg / 350kg □□□□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

FAQ

- 1, 24 小時服務熱線
- 2, 歡迎來電諮詢, 我們竭誠為您服務。
- 3, 我們提供 OEM / ODM
- 4, 我們提供 fashion desing, 歡迎來電諮詢, 我們竭誠為您服務。
- 5, 我們提供 :
 - 1), 我們提供 24 小時服務熱線, 歡迎來電諮詢。
 - 2), 我們提供 24 小時服務熱線, 歡迎來電諮詢。
 - 3), 我們提供 24 小時服務熱線, 歡迎來電諮詢。
- 6, 我們提供 : 我們提供 1 ~ 5 天, 歡迎來電諮詢 7 ~ 30 天
- 7, 我們提供 : T / T, Western Union, Paypal 等各種付款方式。
- 8, 我們提供 : DHL, FEDEX, TNT, UPS, EMS, SEA 及 AIR 等各種運輸方式。

常見問題

Q : 1. 我們提供 24 小時服務熱線?

A : 是的, 我們提供 24 小時服務熱線, 歡迎來電諮詢。我們竭誠為您服務。

Q : 2. 我們提供 24 小時服務熱線?

A : 是的, 我們提供 T / T, Western Union, Paypal 等各種付款方式。

我們提供, 我們提供 24 小時服務熱線 (DHL, FedEx, TNT UPS 等) 歡迎來電諮詢。

Q : 3. 我們提供 24 小時服務熱線, 歡迎來電諮詢?

A : 是的, 我們提供 24 小時服務熱線, 歡迎來電諮詢。

Q : 4. 我們提供 24 小時服務熱線?

A : 是的, 我們提供 24 小時服務熱線。我們提供 5000pcs 3-7 天, 100,000pcs 7-15 天

Q : 5. 我們提供 24 小時服務熱線?

A : 是的, 我們提供 24 小時服務熱線, 歡迎來電諮詢。OEM 歡迎來電諮詢。

Q : 6. 我們提供 24 小時服務熱線?

我們提供 20 天服務熱線 RFID 卡 / NFC 卡 / RFID 卡 / RFID 卡, RFID 卡 24 小時服務熱線, 歡迎來電諮詢。