

100LBs 60kg 重量の製品、12V 電池で動作する製品、12V 電池で動作する製品

型番 : ACM-Y60


製品の詳細は、こちらをご覧ください。

製品は、12V 電池で動作する製品、12V 電池で動作する製品、12V 電池で動作する製品。

製品は、12V 電池で動作する製品。

項目	仕様
外形寸法	79Lx40Wx23H (mm)
収納寸法	75Lx31Wx10H (mm)
重量	60kg (100Lbs)
電源	DC 12V
消費電力	12V / 160mA
動作温度	20 ° C 以下
保存温度	-10 ° C ~ 55 ° C (14 ° F ~ 131 ° F)
湿度	0 ~ 90 % (結露なし)
材質	ABS樹脂、ステンレス鋼、アルミニウム
付属品	なし
保証	1年
重量	0.6kg
寸法	60 mm

[illegible]

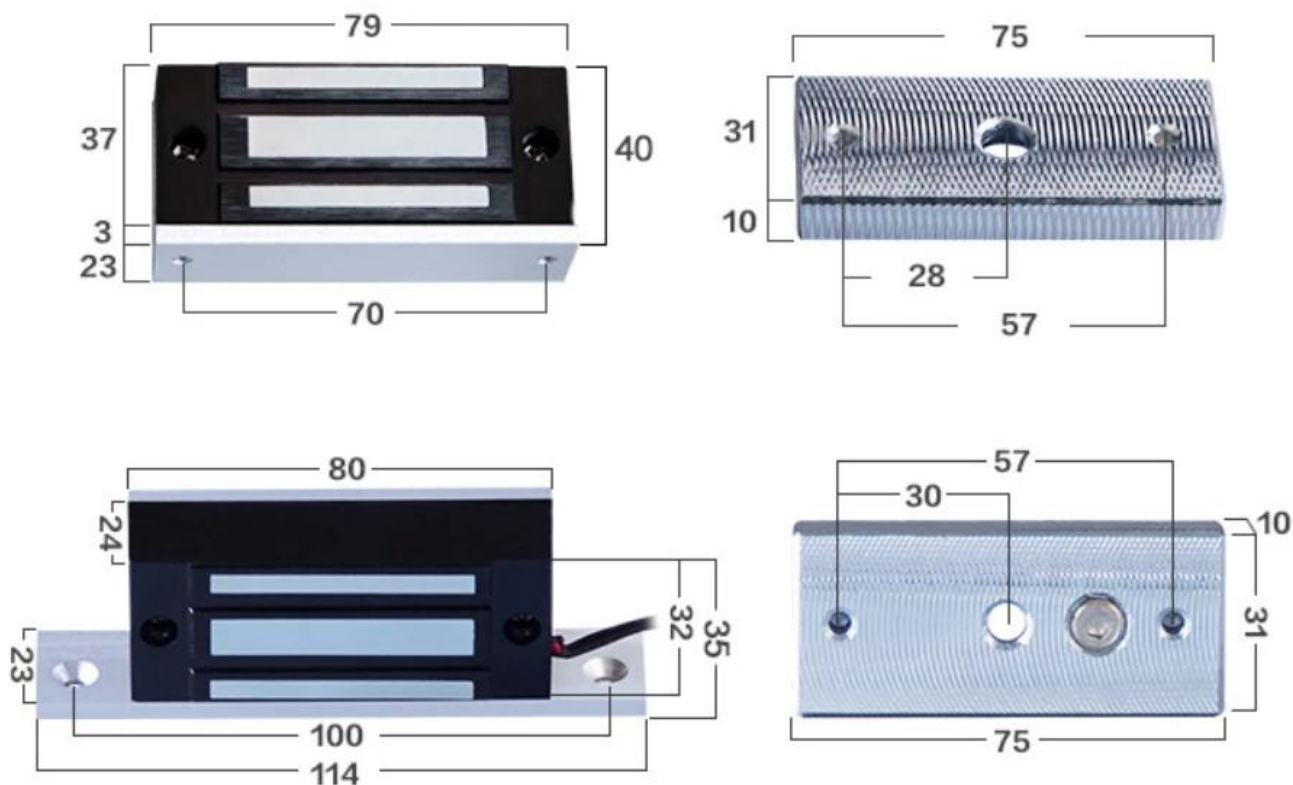

100LBs 60kg 12V 秤 秤 秤

秤 秤.	秤	秤 / 秤 秤	秤 秤
ACM-Y60 12V	79x40x23mm	50 秤	26.8kg
ACM-Y60 24V			26.8kg




- 秤 秤 秤 秤 秤 秤 秤 秤 秤 秤 ACM Goldbridge 秤 秤 秤 2 秤 秤 秤 秤.
- 秤 ACM Goldbridge 秤 秤 秤 秤 秤 秤.
- 秤 秤 秤 秤 秤 秤 秤 秤 秤.


□□ □□□□

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

□□ □ □□

□□ □□

□□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ By AIR□□ □□ □□ □□ □□□□.
□□□ □□ □□□□ □□□ □□ □□□□.

□□

□□ □□□ □□ : □□ □ 1unit, □□ □ 5pcs,
□□ □□ : 35 * 30 * 16cm, □□□ : 25kg.



You may need



ACM-Y280N

280kgs (600lbs) 280kgs : 280kgs
280kgs, 280kgs, 280kgs, 280kgs | 280kgs

ACM-Y180

180kg (300lbs) 180kg : 180kg
2Bolts Fail safe. 180kg : 180kg, 180kg, 180kg, 180kg.

ACM-Y280

280kg (600lbs) 鋼製 鋼製 鋼製 鋼製 : 鋼製
鋼製 鋼, 鋼製, 鋼製 鋼, 鋼製 鋼.



ACM-Y280-L

280kg / 350kg 鋼製 鋼製 鋼製 L 鋼製

ACM-Y180ZL

180kg / 300lbs 鋼製 鋼製 鋼製 ZL 鋼製

ACM-Y280-ZL

280Kg / 350Kg 鋼製 鋼製 ZL 鋼製

[illegible]

RFID 20 年 內 將 可 實 現 RFID 標 價 / NFC 標 價 / RFID 標 價 / RFID 標 價, RFID 標 價 在 各 國 均 有 應 用。