




Dimensions	86Lx86Wx20H(mm)
Standard Structure	Fireproof Material
Current Rating	3A,36VDC Max
Output Contact	NC\COM
Mechanical Life	1000000 tested
Suitable for Door	Hollow Door
Operating temp	-10°C~55°C(14°F-131°F)
Panel Material	Fireproof Material
Weight	0.15kg
Standard Packing	200pcs

Wiring Diagram




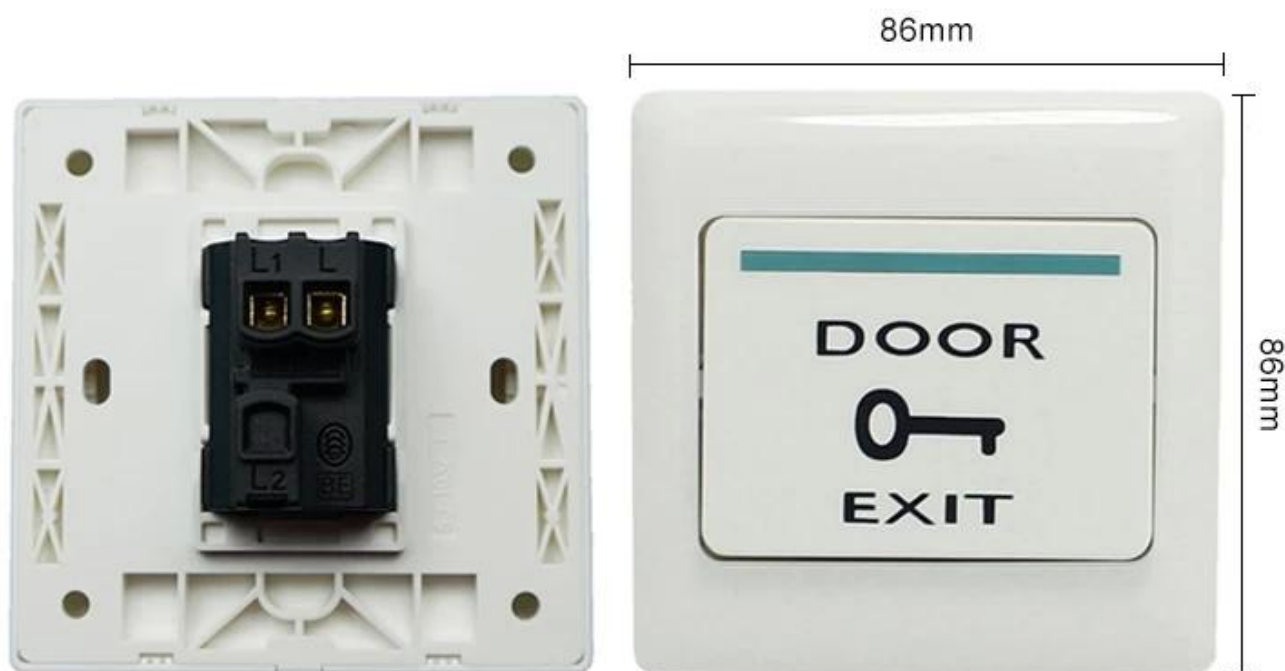

DOOR



EXIT

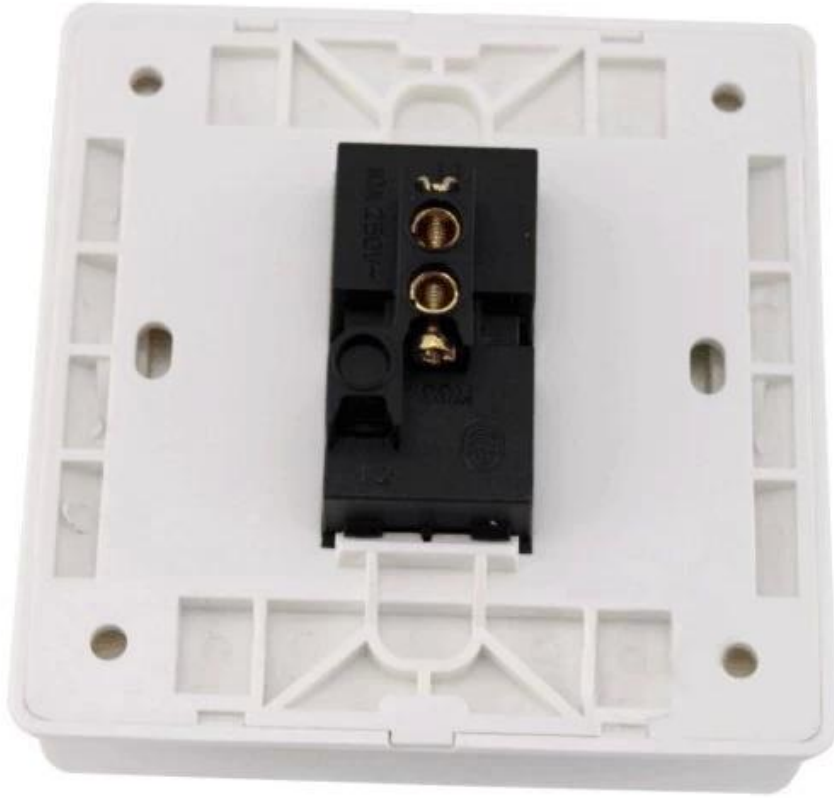

□□□ □□□

- 1, □□ □□□□ □□ □□ □ □□□□ 24 □□
- 2, □□ □□□□ □ □□ □□, □ □□□ □ □□ □□□□□□.
- , OEM / ODM □□□□
- 4, □□□, fashin desing, □□□□ □ □□□□□ □□, □□ □□ □□
- 5, □□ □ □□□ :
 - 1), □□ □□□ □□□□ □□ □□□ □□□ □□ □□□□□□□□.
 - 2), □□ □□□ □□□□ □□ □ □□ □ □□□□
 - 3), □□□ □□ □□□ □□□ □□□ □□ □□□□ □□ □□ 2-3 □ □□□ □□□□.
- 6, □ □□ □□ : □□ □□□ □ 1 ~ 5 □, □□ □□□ □ 7 ~ 30 □
- 7, □□ : □□□ □□ □□□ □□ □ □ □□□□ : T / T, □□□ □□□, □□□, □□ □□ □□
- 8, □□ : □□□ □□□ □□□ DHL, □□□, TNT, UPS, EMS, □□□ SEA □ □□, □□□ □□ □□□ □□ □□□□ □□□ □ □□□



金橋 GOLDBRIDGE 有限公司 GOLD BRIDGE CO., LTD

地址:

Building 405, Shangbu Industrial
Area, Futian District, 深圳市福田区, 518031

电话: + 0086-755-83767678 手机: +
0086-755-88391348

联系人: Lily Jiang

微信 / whatsapp / wechat: +
0086-13554918707

电子邮箱: lily-jiang1206

电子邮箱: sales (at) goldbridge sz.com

网站: [http : // www. goldbridge
sz.com](http://www.goldbridge
sz.com)