



DC 12V 5A 5PUSH 5GND 5NO 5NC 5DELAY

5A 5PUSH 5GND 5NO 5NC 5DELAY


5PUSH 5GND 5NO 5NC 5DELAY 5A 5PUSH 5GND 5NO 5NC 5DELAY.

5PUSH 5GND 5NO 5NC 5DELAY, 5A 5PUSH 5GND 5NO 5NC 5DELAY 5A 5PUSH 5GND 5NO 5NC 5DELAY

5PUSH 5GND 5NO 5NC 5DELAY.

-
-
-
-
-
-

Dimensions(mm)

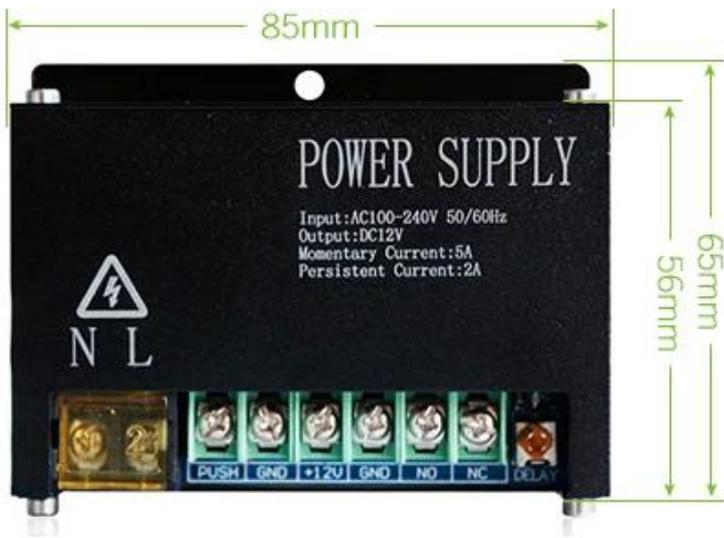

► L85 x W65 x D27mm

Size: L88 x W71 x D29mm ◀
Weight: 0.14kg ◀



Access Control Switch Power Supply

The power supply is applied to access control devices and building intercom device and also for video access control.



Metal shell

Safety | Anti-fall | Fire prevention



Delay adjustment


Built-in time delay circuit that can set unlock time, set exit button input that can control unlock electric lock.



Smart circuit board

Using high-quality circuit boards



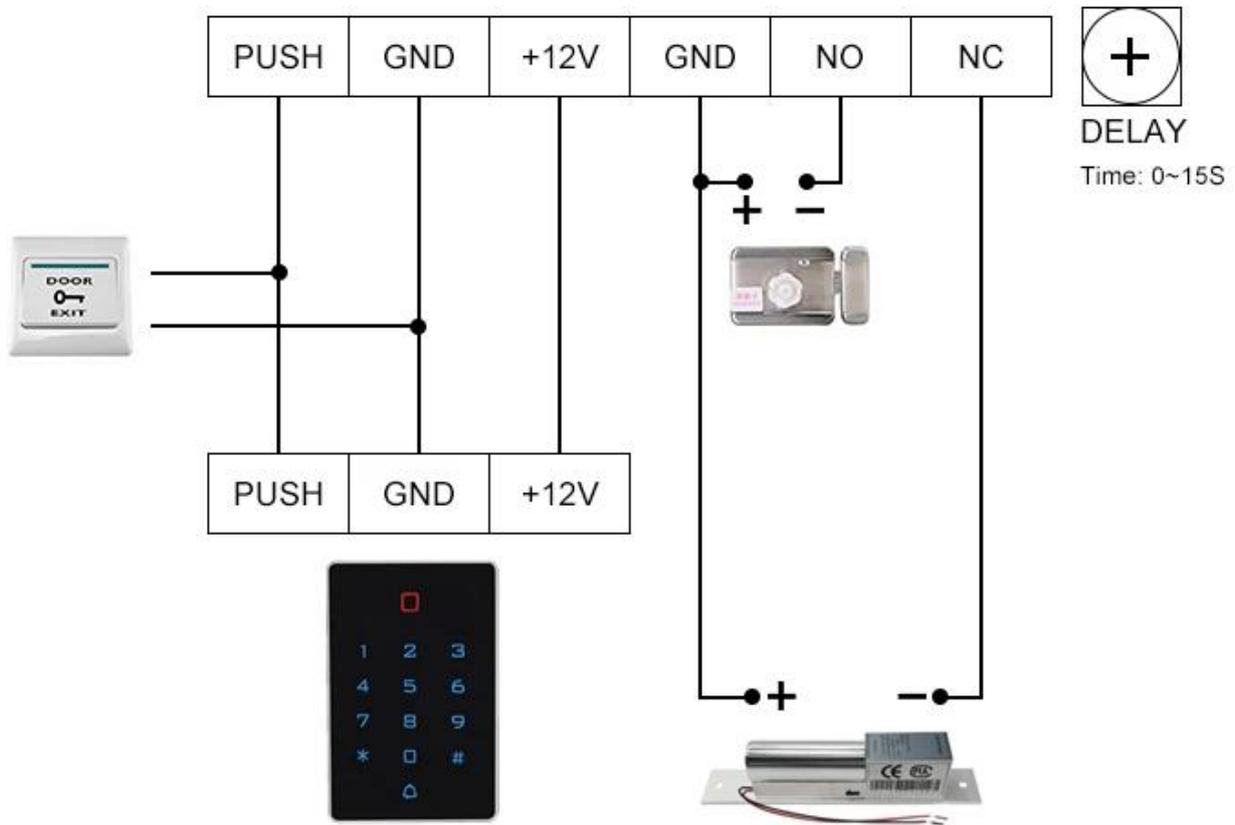

Scope of Application



Company



Hospital



Hotels



Logistics



Port



Financial



Government



Factory



Aviation



School




00 000 000 000 000 00 0 000 000 00 000000.
 00 000 000 000 000 00 00000 000000.
 0000 000 0 00 00 0000 00 0 00000.




00 00 (00 00 00)

0000 2000 0000 0000 RFID 0000 0000 0 00 0 0000000.
 0000 00 00 0000 00 00 0000 0 00 0000, 0000 00 00
 00 00 / 0000 0000 0000 0000 0000 0 00 000000. 0000
 0000 CO, FTA, 00 F, Form E ... ECT0 00 0000 00
 0 0000 0000 0000 0000 00 0 0 000000. 0000 0000 0000
 00 000000 0000 000000. EXW, FOB, FCT, CIF, CFR
 ... 00 0000 0000 00 0000000. 0000 00 0 0000000 0000
 0000 00000 0 0 00000.

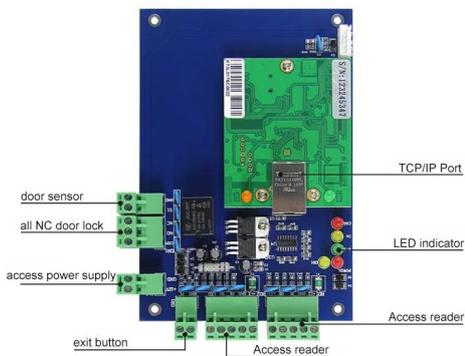


ACM-WEG01.

0000 1 0000 00 0 0 00000.

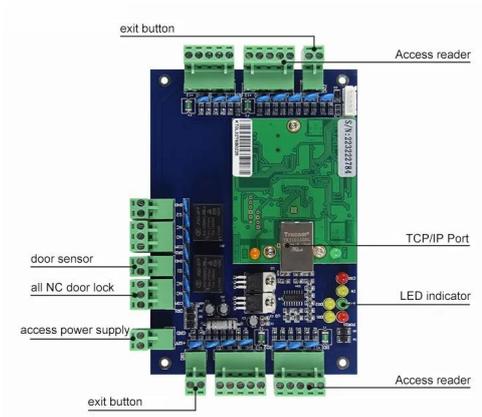

ACM-WEG02.

□□ 2 □□ □□ □□ □□ □□.

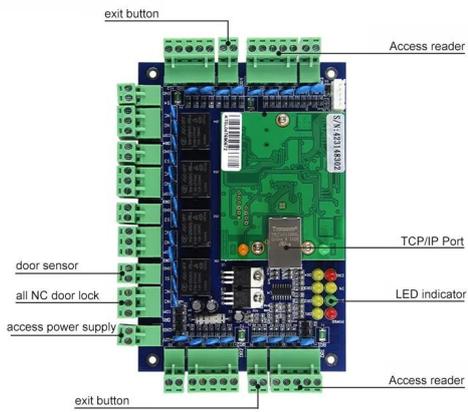

ACM-WEG04.

□□ 4 □□ □□ □□ □□ □□.

You May Like



ACM-K2A / B.

□□ □□ □□ LED□□□□ □□ □□ □□



ACM-Y280.

□□ □□ □□□ (280kg / 600lbs)



ACM-Y806-5A.

□□□ □□□□□ □□ □□ □□ 5A



ACM225.

□□ □□□ RFID □□□ □□ 12KHz.

