



5 00U LED

Y-500U

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

1 8 5 L x 2 5 7 W x 3 7 H (m m) 9 L x 2 5 W 2 H (m m) 1 2 V D C / 2 4 V 9 6 m A 1 8 m A

8 m m
 - 1 ~ + 5 5 °C
 0 1 4 ~ 1 3 1 F) ~ 9 %
) 5

□
□
□
□
□
□
□
□
□
□
□
□
1
.
Ø
Ø
k
g

□□ Advanatge

1. □□, □□ & □□□.
 2. □□□, □□ □□.
 3. □□ □□ □□, 3 □□ □□ □□.
 4. 5000000□□□ □□□.
 5. MOV□ □□ □ □□ □□□□□.
 6. □□□ □ □□□□ □□, □□□ □□□□□ □□□.
 7. □□ □□□ □□ □□ □□.
 8. □□□ □□, □□,
- A : □ □□□ □□ □□□□□.
- B : □□□ □□□ □□□□ □□□ □□ □□□ □□□ □□ □□□□□□.
- C : □□□ □□ □□, □□ □□□ □□□□□.

□□□□□□. OEM / ODM □□



UW-500U-LED

Feature: Fail Safe

Face Plate: 185Lx25.7Wx37H(mm)

Bolt: 16(length)x12.7(diameter)(mm)

Voltage: DC12V

Start Current: 960mA

Standby Current: 180mA

Solid Bolt : polishing housing, 1000Kg Holding Force

Suitable For: Electric Bolt For Narrow Door

Signal Outpu: Door status Output,NO/COM


Surface Temp: Low Temperature

Induction Distance: 8mm

Special Designed: Tested to 500000 operations

Plate material: Stainless Steel

Weight: 1.2kg

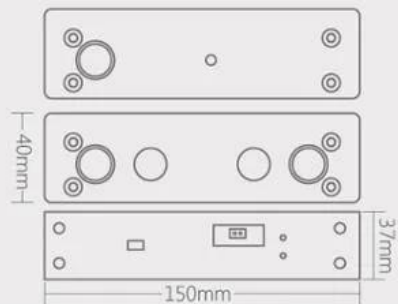

□□□□□□□□



- 2019 年 10 月 20 日 至 2020 年 10 月 20 日。ACM Goldbridge 2 月 20 日 至 2020 年 10 月 20 日。
- 2019 ACM Goldbridge 2 月 20 日 至 2020 年 10 月 20 日。
- 2019 年 10 月 20 日 至 2020 年 10 月 20 日。

2019 年 10 月 20 日 至 2020 年 10 月 20 日

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
6.8mm for M8-1.25thread
Inside: Drill a hole diameter is 8mm folding the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

包裝 & 尺寸

包裝 說明

可選 DHL, 郵政, TNT, UPS, EMS, SEA 或 By Air 寄件 均可 寄件 國際 貨物。
郵政 寄件 國際 貨物 需 寄件 國際 貨物。

包裝

包裝 尺寸 : 長 1 米, 寬 20 厘米,

包裝 重量 : 52 * 29 * 12cm, 重量 : 13.6kg. 包裝 內 50 個 貨物



You may need



ACM-Y100S 2PIN

□□ □□ □□ □□
 □□ □□ 100MA / □□ 900MA Power □□ □□,
 2 □

ACM-Y100S 5PIN

□□ □□ □□ □□ □□
 □□ □□ □□, □□□ □□ □□ □□, 5 □

ACM-Y500A

□□ □□ sturdiness □□ BoltW / □□
 DoorLock □□ : 205x30x38mm



ACM-Y280

□□ □□ □□ (280kg / 600lbs)

ACM-Y131

□□□□□ □, □□ □, PVC □□ % s □□□□□ □□ □□□
(NC / NO)

ACM-Y066

□□□ Smart Lock (□□ □□ □□)
□□ □□ : 130x98x41mm □□ □

