



280KG (600 LBS) 280KG (600 LBS) 280KG (600 LBS)

280KG (600 LBS) 280KG (600 LBS) 280KG (600 LBS)

280KG (600 LBS) 280KG (600 LBS) 280KG (600 LBS)

1
9
L
x
1
9
r
r
x
4
5
W
x
r
i
H
(
m
m
)
2
8
k
a
a
a
L
b
s
)
1
2
/
2
4
4
V
D
C
.
a
a
a
a

[illegible]

[illegible]

Advantge


- 280kg, 600pounds.
- 12 VDC (24 VDC).
- 12VDC.
- MOV.
- , , , .
- LED .
- (NO / NC / COM)
- (NO / NC / COM)
- .
- , .
- .
- , .
- CE , MA

OEM / ODM



ထိုက် ထိုက် ထိုက် ထိုက် LED ထိုက်ထိုက်, ထိုက်ထိုက် ထိုက် ထိုက်, ထိုက် ထိုက် ထိုက် . ထိုက် ထိုက် ထိုက် ခ် ထိုက်.

ACM-Y280 ထိုက် ထိုက် ထိုက်. PCB ထိုက် ထိုက် ထိုက် ခ် ထိုက်. ထိုက် 12v & 24v ထိုက် ထိုက် 7 ထိုက် ထိုက် ထိုက် ထိုက် ခ် ထိုက်. ထိုက် ထိုက် PCB ထိုက် ထိုက်. ထိုက် ထိုက် ထိုက်ထိုက် ထိုက် ထိုက် ထိုက်ထိုက်. ထိုက် ထိုက် ထိုက် ထိုက် ထိုက် ထိုက် ထိုက်ထိုက်.

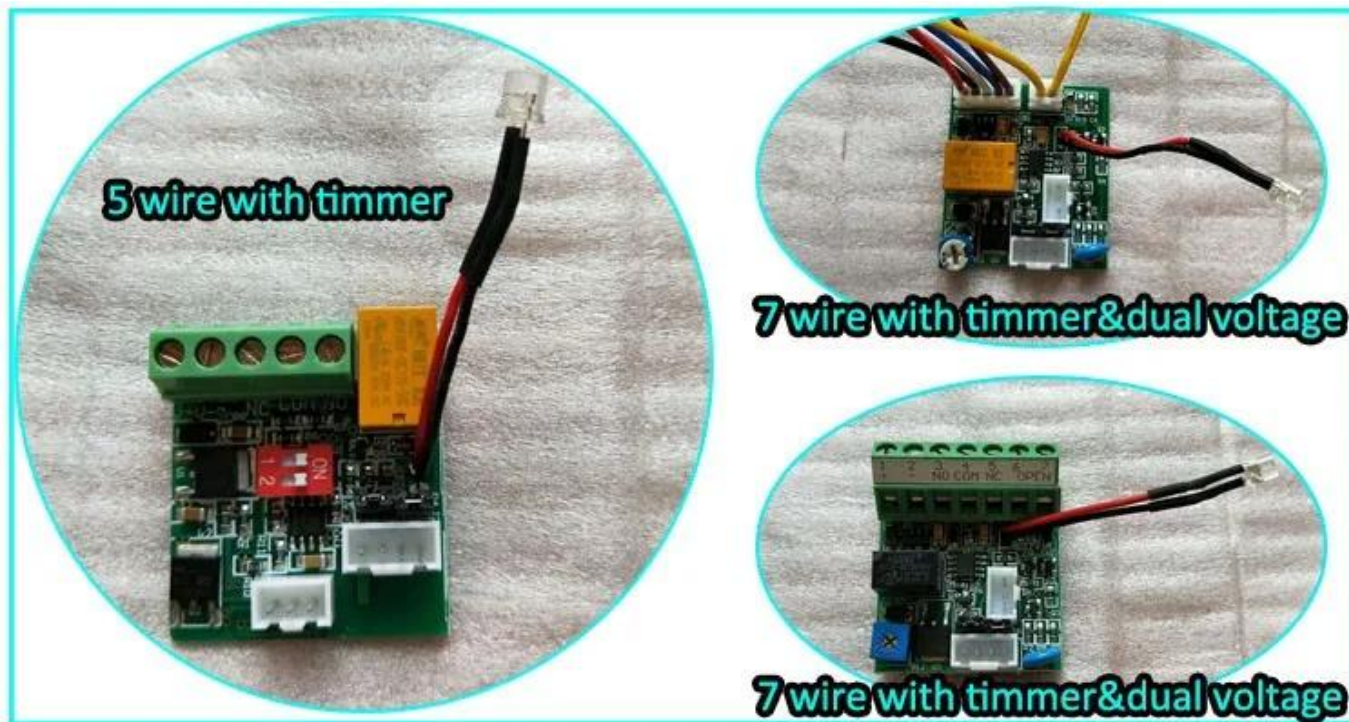


ထိုက် ထိုက်

- ထိုက် ထိုက် ထိုက် ထိုက် ထိုက် ထိုက်, ACM Goldbridge ထိုက် ထိုက် ထိုက် 2 ထိုက် ထိုက် ထိုက်.
- ထိုက် ACM Goldbridge ထိုက် ထိုက် ထိုက် cahrgeထိုက်.
- ထိုက် ထိုက် ထိုက် ထိုက် ထိုက် ထိုက်.


ထိုက် ထိုက်ထိုက်

STANDARD INSTALLATION STEPS


Professional guidance, Rest assured



1 Fold the plate to 90° .




2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.




3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.




4 Drill holes based on the marked positions.




5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).




7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.




8 Place the rubber ring between armature plate and door leaf.




9 Use Allen key to remove the mounting plate from lock body.




10 Fix the mounting plate on the door frame according to the holes drilled earlier.




11 Use Allen key to screw the lock body on the mounting plate.




12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.




13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

如何包裝

如何包裝

我們提供 DHL, FEDEX, TNT, UPS, EMS, SEA 及 By AIR 的包裝服務。我們提供專業的包裝服務。

如何包裝

我們提供包裝：每件 1unit, 每件 10pcs,

每件尺寸：35 * 30 * 16cm, 重量：20kg。每件 50 個裝箱



You may need



最大重量 (280kgs / 600lbs) 重量限制 : 280kgs / 600lbs
 最大高度, 最大重量, 重量限制, 重量限制 | 重量限制

2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe.

280kg (600lbs) በጣም በጣም በጣም : በጣም
በጣም, በጣም, በጣም, በጣም.



ACM-Y280-L

280kg / 350kg □□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

□□□ □□□

- 1, □□ □□□ 24 □□ □□□ □□□□□
- 2, □□ □□□□ □ □□ □□, □ □□□ □ □□ □□□□□□□□.

