



180kg (300lbs) □ □ □ □ □ □ □ □ □ □

☐ ☐ ☐ ☐ ☐ ☐ 1 7 L x 4 W ☐ X ☐ 2 1 H
 (m m)

1
9
L
x
1
9
r
r
x
4
r
5
W
r
r
i
H
(
m
m
)
1
8
k
a
r
a
L
b
s
)
1
2
/
2
4
4
V
D
C
.
r
r
r
r

[0](#), [1](#), [2](#), [3](#), [4](#), [5](#), [6](#), [7](#), [8](#), [9](#), [A](#), [B](#), [C](#), [D](#), [E](#), [F](#), [G](#), [H](#), [I](#), [J](#), [K](#), [L](#), [M](#), [N](#), [O](#), [P](#), [Q](#), [R](#), [S](#), [T](#), [U](#), [V](#), [W](#), [X](#), [Y](#), [Z](#), [\[](#), [\](#), [\]](#), [^](#), [_](#), [`](#), [{](#), [|](#), [}](#), [~](#), [.](#), [,](#), [;](#), [:](#), ["](#), ['](#), [<](#), [>](#), [=](#), [+](#), [-](#)

[illegible]


Advantge

- 180kg, 300pounds.
- 12 24 VDC (V).
- 12VDC.
- MOV.
- , , , .
- LED .
- (NO / NC / COM)
- (NO / NC / COM)
- .
- , .
- .
- , .
- CE , MA

OEM / ODM



ພວກ ພວກ ພວກ ພວກ LED ພວກພວກ, ພວກພວກ ພວກ ພວກ, ພວກ ພວກ ພວກ . ພວກ ພວກ ພວກ ພວກ ພວກ.
 ACM-Y180 ພວກ ພວກ ພວກ. PCB ພວກ ພວກ ພວກ ພວກ ພວກ. ພວກ 12v & 24v ພວກ ພວກ 7 ພວກ ພວກ ພວກ ພວກ ພວກ. ພວກ
 ພວກ PCB ພວກ ພວກ. ພວກ ພວກ ພວກພວກ ພວກ ພວກ ພວກ. ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ.

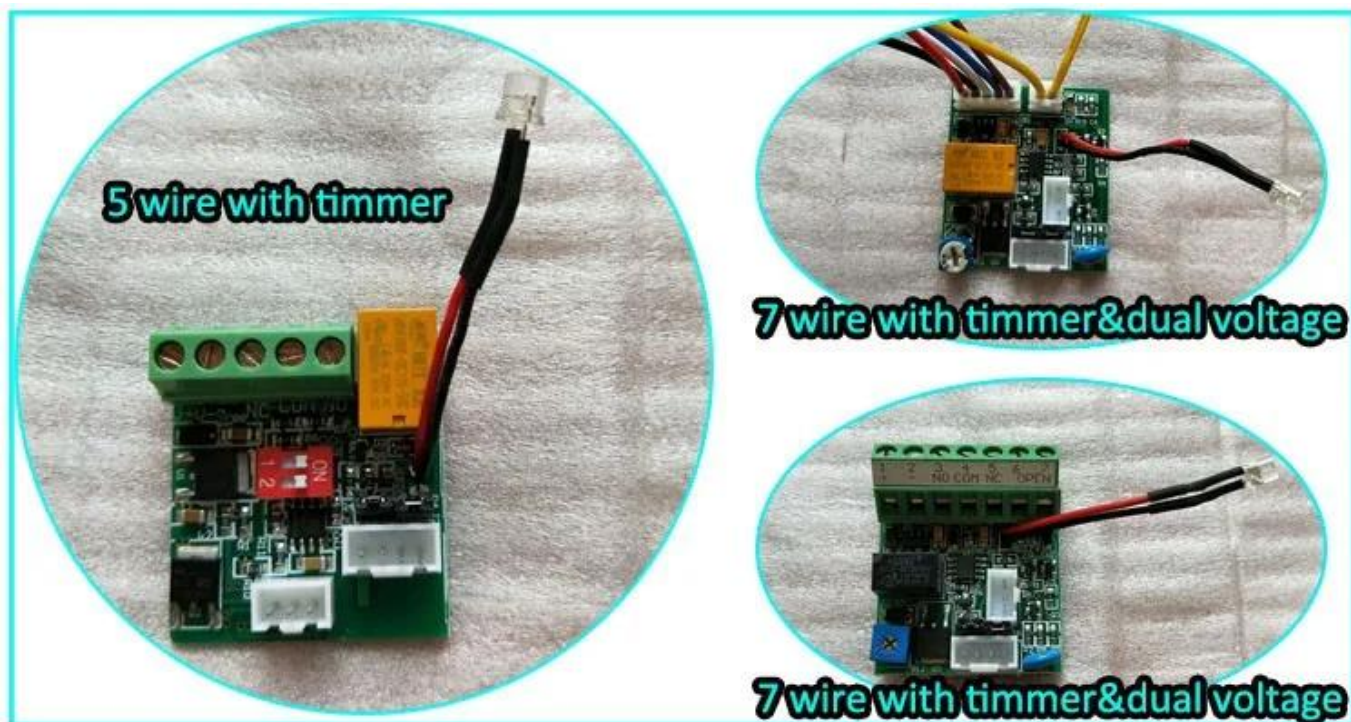

ພວກ ພວກ

- ພວກ ພວກ ພວກ ພວກ ພວກ ພວກ, ACM Goldbridge ພວກ ພວກ ພວກ 2 ພວກ ພວກ.
- ພວກ ACM Goldbridge ພວກ ພວກ ພວກ cahрге.
- ພວກ ພວກ ພວກ ພວກ ພວກ.

ພວກ ພວກ

STANDARD INSTALLATION STEPS

Professional guidance, Rest assured



1 Fold the plate to 90° .



2 Close the door first, then place the upper side of template on door frame, while adjust the left side next to the door leaf.



3 Mark screw positions of armature plate and magnetic lock on door leaf and door frame respectively.



4 Drill holes based on the marked positions.



5 Make a combination based on the picture.



6 Strike the pin into the armature plate slightly (to avoid movement).



7 Make a combination based on the picture (add washer accordingly). The rubber ring must be added.



8 Place the rubber ring between armature plate and door leaf.



9 Use Allen key to remove the mounting plate from lock body.



10 Fix the mounting plate on the door frame according to the holes drilled earlier.



11 Use Allen key to screw the lock body on the mounting plate.



12 Close the door to test holding force. The angle between armature plate and magnetic lock can be adjusted by adding or reducing washers.



13 After all the appropriate procedures, the holding force can be maximized. Finally, fix the tamper screw.



Hollow Metal Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 16mm



Wooden Door
Drill a hole
Inside: Diameter is 8mm
Outside: Diameter is 12.7mm



Metal Surface Door
Inside: Drill a hole
diameter is 8mm folding
the plastic straight pin

Notice:

Thickness of Door Leaf:

350LBS: 44mm

600LBS: 50mm

800LBS: 48mm

1200LBS: 46mm

包裝 說明

包裝 說明

可選 DHL, FEDEX, TNT, UPS, EMS, SEA 或 By AIR 寄件 運費 另計 運費 另計。
運費 另計 運費 另計。

包裝

包裝 說明 : 1unit, 10pcs,

包裝 尺寸 : 34 * 25 * 14cm, 重量 : 14kg. 可裝 50 個 包裝



You may need



ACM-Y280N

280kg (600lbs) 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe.

ACM-Y180

180kg (300lbs) 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe.

ACM-Y280

280kg (600lbs) 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe. 2Bolts Fail safe.



ACM-Y280-L

280kg / 350kg □□ □□ □□ □ L □□□

ACM-Y180ZL

180kg / 300lbs □□□□ □□ □□ □ ZL □□□

ACM-Y280-ZL

280Kg / 350Kg □□□□ □□ □ ZL □□□

□□□□ □□□□

- 1, □□ □□□ 24 □□ □□□ □□□□□
- 2, □□ □□□□ □ □□ □□, □ □□□ □ □□ □□□□□.

8, □□ : □□□ DHL, FEDEX, TNT, UPS, EMS, SEA □ AIR□ □□□□ □□ □□ □□ □□ □□ □□ □□ □□ □□ □□.

□□□ 20 □ □□ □□□□ RFID □□ / NFC □□ / RFID □□□ / RFID □□, RFID □□ □ □□□ □□ □□□ □□ □□□□□.