



□□ □□ **AC110V ~ 240V** □□ □□ □□ □□  
□ **LED** □□ □□ □□ **DC12V 50W**


5A □□ □□ □□ □□  
□□□□ □□ □□ □ □□ □□□□ □□□□.  
□ □□ □□ □□□ □□□, □□□ □□ □□□ □□, □□ □□ □□□ □□  
□□ □□□ □□□□□ □□□□□.



[illegible]

W  
D  
C  
V  
;  
/  
n  
c  
.  
S

□□□ □□□

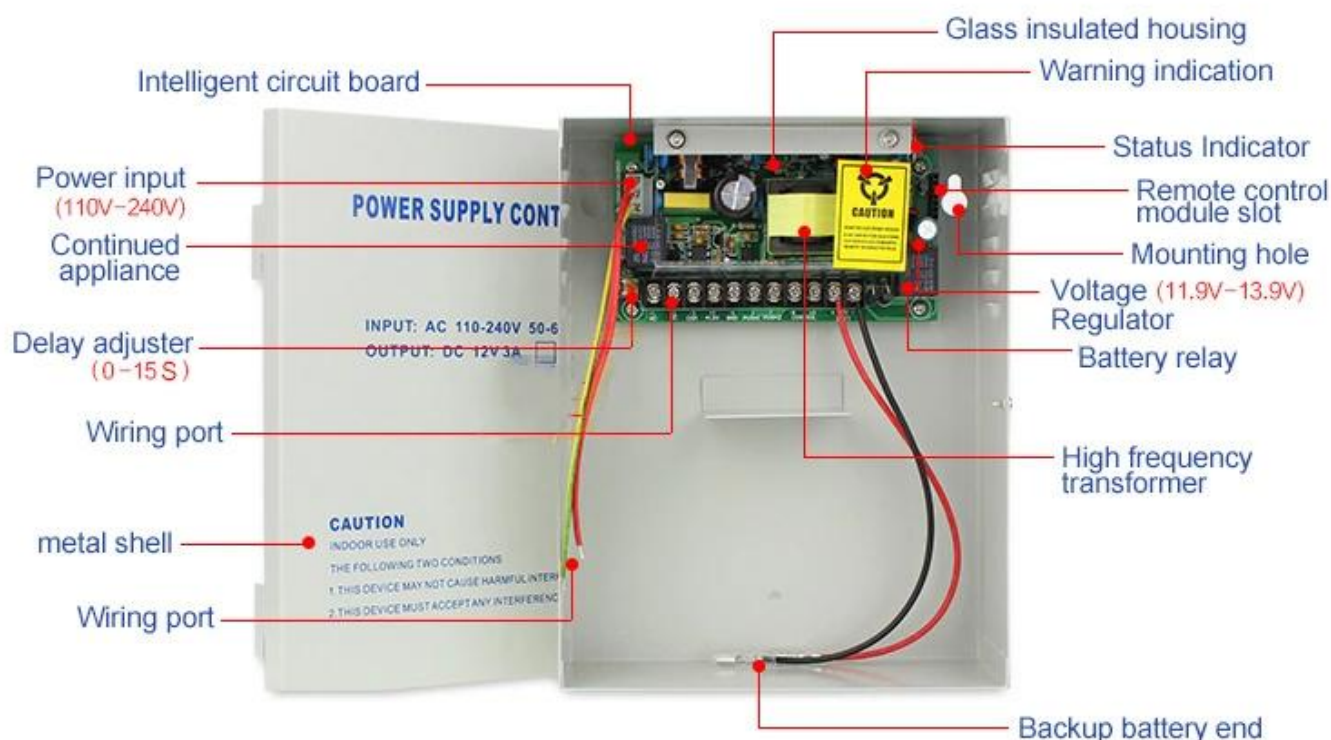


External terminal



External wiring port for easy wiring, easy to use, save installation time

Remote control module slot


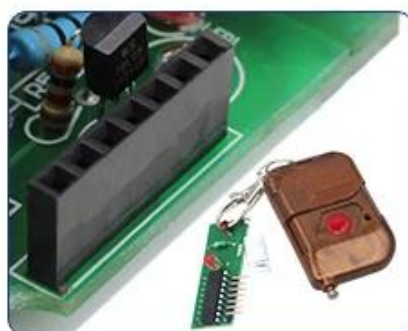


The access control power board slot design can insert the remote control module into the slot and unlock it with one button.

For strong current




Ordinary access control power supply provides 1.5-1.8A current output, 208K 5A access control power supply provides 5A current output

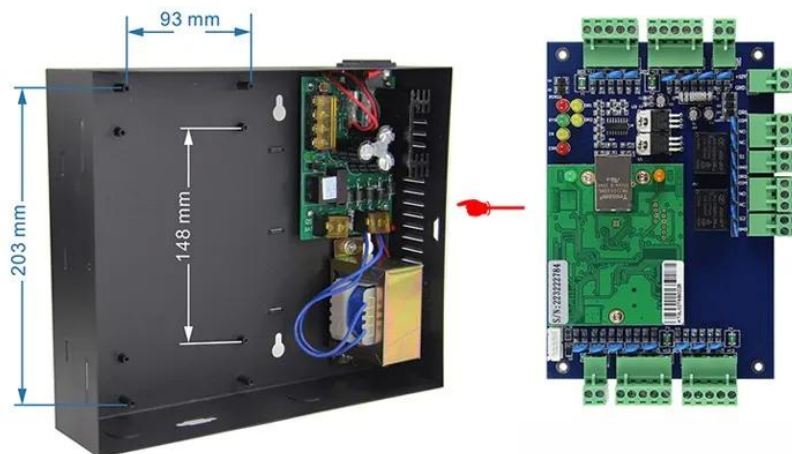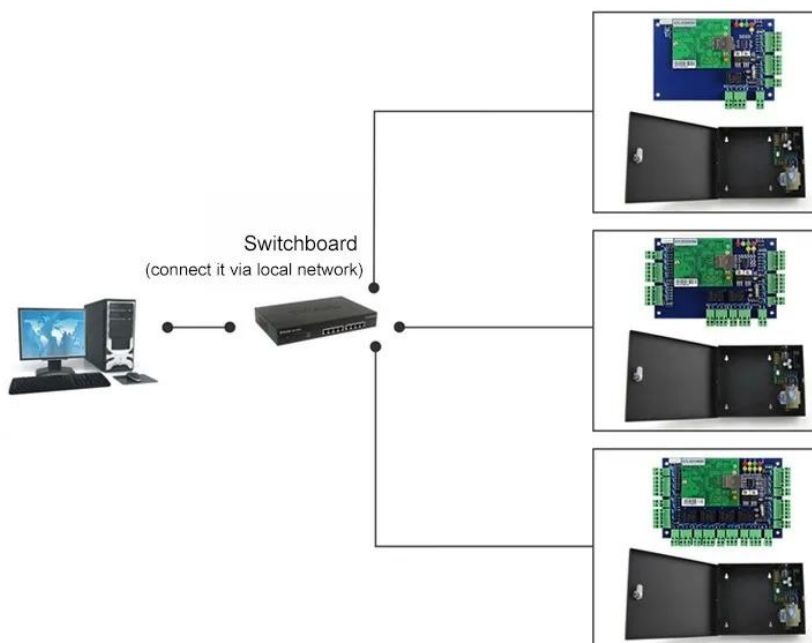

#### Kindly remind:

All network control board must configure with access power supply.  
1 board for 1 power supply

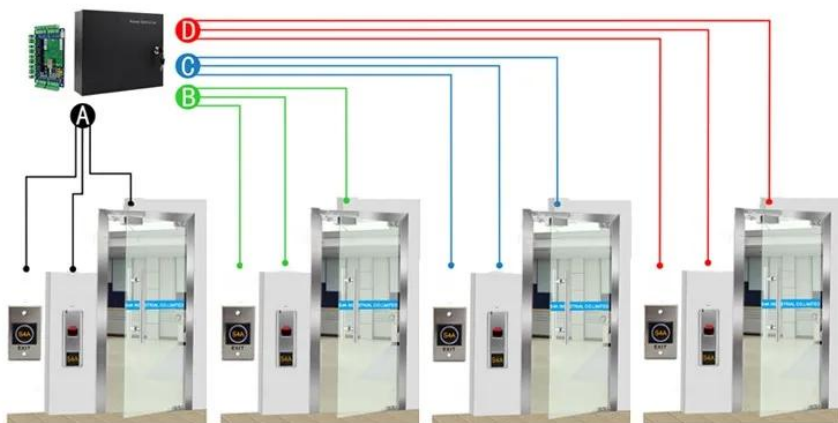

ACM-WEG04

Four doors 1 way: Control 4doors (Enter by Swipe cards and Exit by Push button)


### Scope of Application



Port



School



ॐ नमो भगवते वासुदेवाय ॥  
 ॐ नमो भगवते वासुदेवाय ॥  
 ॐ नमो भगवते वासुदेवाय ॥



□□ □□ (□□ □□ □□)

[illegible]



## You May Like



### ACM-K2A / B.

□□ □□ □□ LED□□□□ □□ □□ □□



### ACM-Y280.

□□ □□ □□□ (280kg / 600lbs)



### ACM-Y806-5A.

□□□□ □□□□□□ □□ □□ □□ 5A



### ACM225.

RFID 12KHz.



### ACM-210.

RFID Wiegand



### ACM26X.

125KHz EM RFID : 115mm × 75.5mm × 16.8mm

RFID

### ACM Shenzhen Goldbridge

RFID 20 , RFID , RFID , RFID , RFID .



০০০ ০০০০ ০০০০ ০০ ০০০ ০০০ ০০ ০০০ ০০০০০০!  
 ০০০ ০০০ ০ ০০০ ০০০ ০০০ ০০০০ ০০০০ ০০০ ০০০০০ ০০০০ ০০০০০.