



□□□ □□□ □□ □□□□□□

[illegible]

በግልጽ ሲሆን... በግልጽ ሲሆን በግልጽ ሲሆን በግልጽ ሲሆን
በግልጽ ሲሆን በግልጽ ሲሆን በግልጽ ሲሆን በግልጽ ሲሆን.

Maximum door weight	180kg
Maximum door width	1200mm
Maximum torque	165Nm
Noise	<60dB
Opening and closing time	6-12S
Open range	86°~95°
Power supply	AC220V ±10% 50/60Hz
Rated power	55W
Special machine power	<2W
Operating temperature	-20°C~55°C
Protection level	IP68
Control box size	156x120x46mm
Unit size	320x110x70mm

□□ □□

GLASS DOOR FLOOR SPRING

Hidden Installation
Elegant Design

D180S




WATERPROOF IP68

Only limit at motor




NO.1

Built-in sealed waterproof
rubber ring

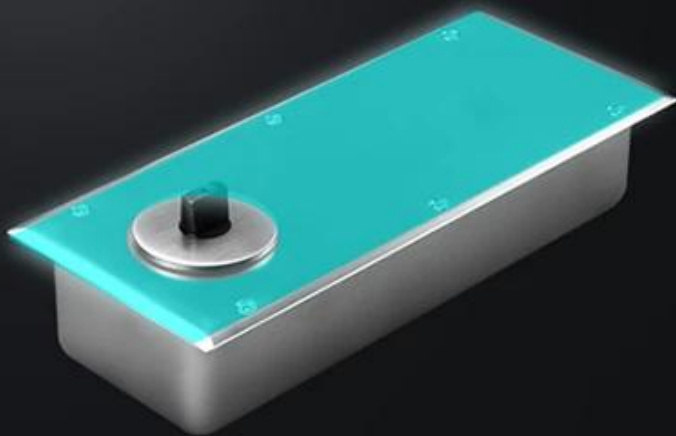

NO.2

Sealing rubber panel

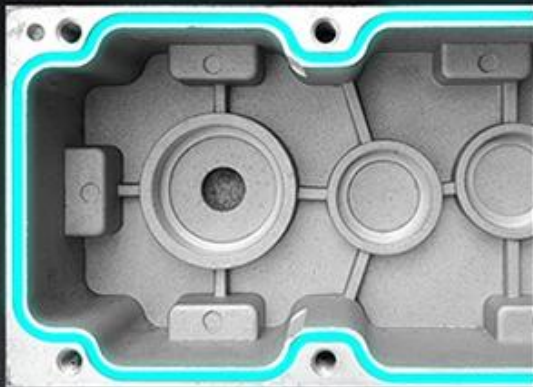

NO.3

Sealed waterproof rubber ring



NO.4

One-piece stretch molding
without leakage



NO.5

Motor adopts integral injection
molding, waterproof




NO.6

Glue filling and sealing process
for outlet


BOUNCE BACK


When the machine is running, if it encounters obstacles, the door will stop and move in the opposite direction

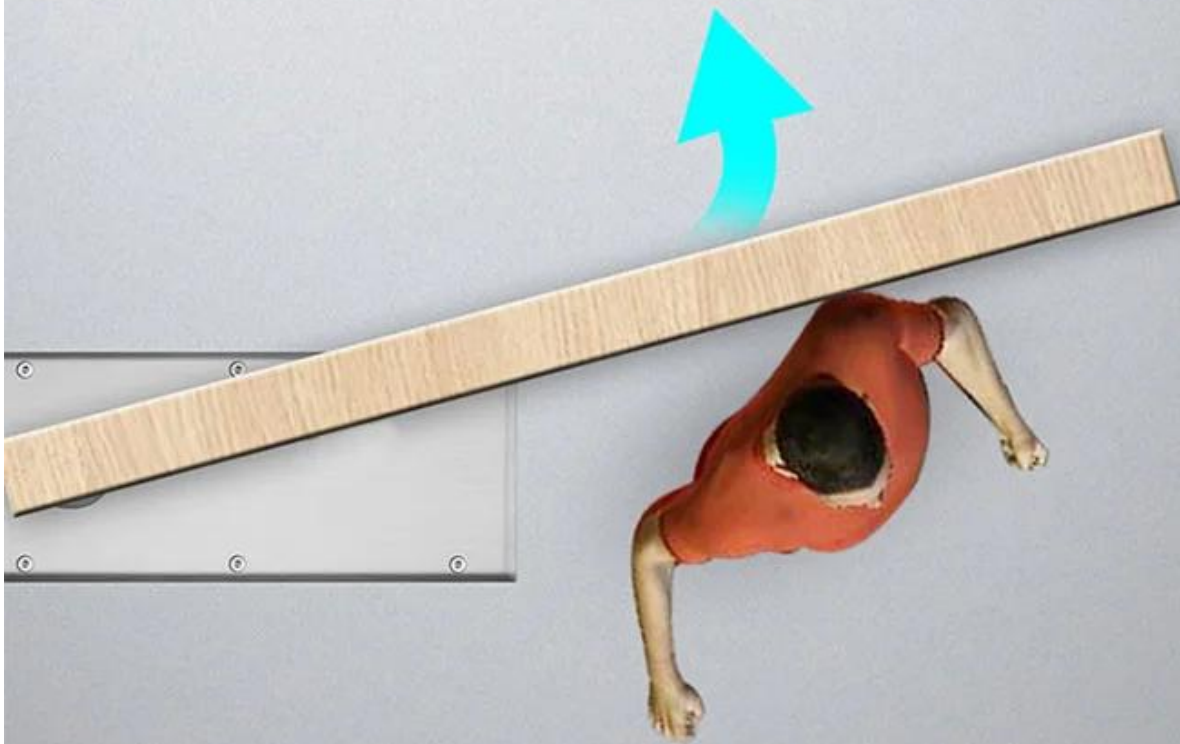


INSTALLATION DIAGRAM

Automatic door installation diagram

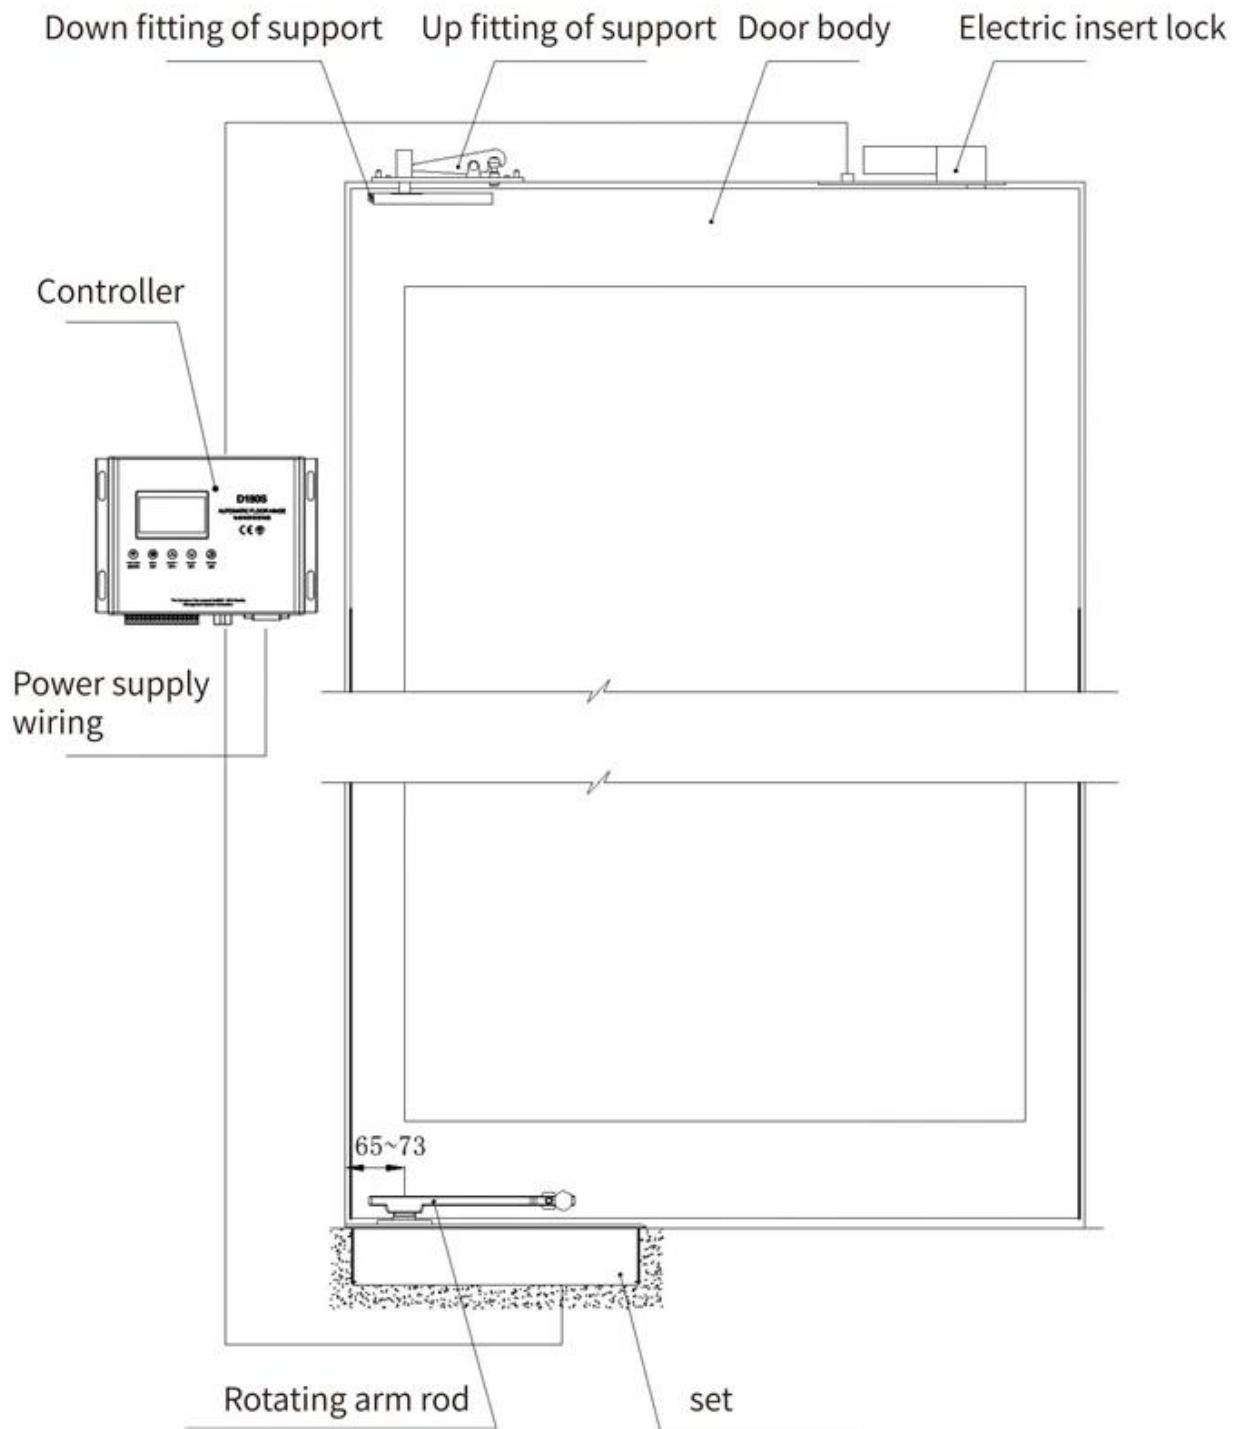


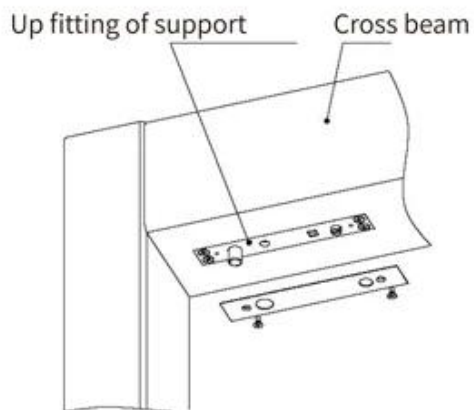


(Picture a)

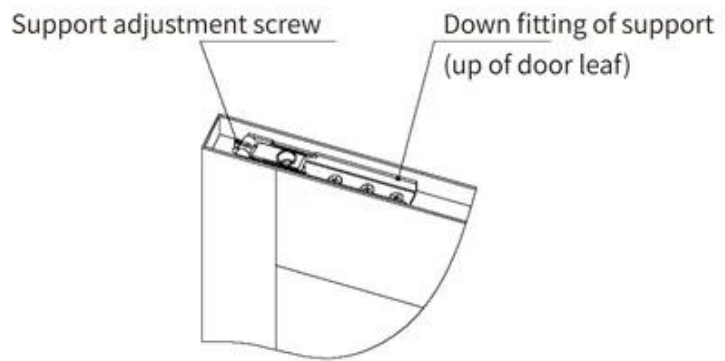

(Picture b)

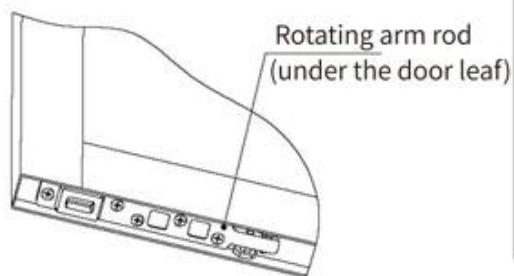

(Picture c)

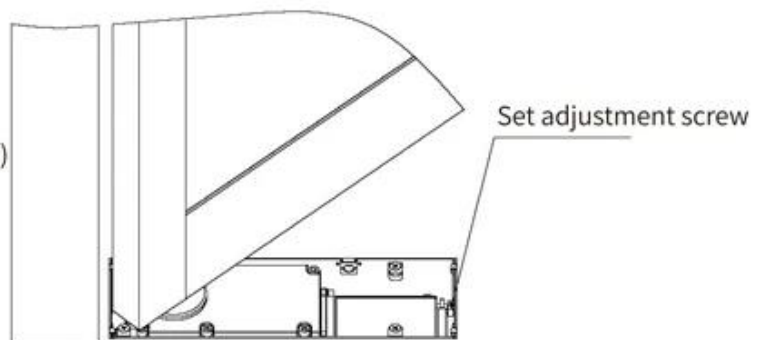

(Picture d)

□□ □□

- □□□□ □□ □□□ □□ □□ □□□□ □□ □□□□. ACM Goldbridge□ □□ □□□ □□ 2 □ □□□ □□□□□.
- □□□ ACM Goldbridge□ □□□□ □□ □□□ CAHRGE□□□.
- □□□ □□□ □□□ □□□ □□□□□□.

□□ □□

□□□ 20 □ □□□ □□ □□ □□ □ □□ □□ □□ □□ □□□□□, □□□
 □□□ □□ □□□ □□□ □□□ □□□! □□□ □□ □□□ □□□□□□. □□□□ "□□□"□ □□□□□□!
 □□□□ □□□□□

You May Need

Complete Door Access Control Solution Provider



RFID Card



RFID Key fob



RFID Wristband



RFID Reader



**Long Distance
UHF Reader**



**Access Control
Reader**